#### FAST CUP W/ BUNNLINK WIFI

Height: 33.5" Width: 16.8" Depth: 24.4" (85.1cm) (42.7cm) (62.0cm)



- BUNNlink secure, remote machine monitoring solution provides you with peace of mind and will automate Customer Care messages, letting you know when to refill hoppers or empty the waste bin
- VirtualTOUCH Clean Contact solution providing your customers hands-free dispensing by capturing the on-screen QR code with their smart device
- Freshly ground and hot brewed coffee, one fast, excellent cup at a time
- Expand your menu with a refreshing selection that is ready to be iced
- Large full color 10" touchscreen creates an easy to follow experience for every user
- Promote your brand by uploading your own graphics and videos
- Simple navigation screens such as Picture Prompted Cleaning makes routine care
  of the Fast Cup a snap for your staff
- Practically no coffee waste the Fast Cup bean to cup system delivers individual cups of fresh coffee. What they want / when they want it.
- Automated grinding, brewing and managing spent grounds frees up your staff to spend time with your customers

#### Agency:





### **Specifications**

**Product #:** 55400.0100 **Hopper Capacity:** 3.00 lbs (1.361 kgs)

Water Access: Plumbed Display: Full Color Touch

Finish: Stainless/Black Door: Side Hinge

Hoppers: Three Temp. Setting: 200°F (93.333°C)

### **Electrical & Capacity**

Volts*		Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
	208	24.0	5000	Yes	NEMA L6-30P	63	60°F (15.5°C)	1	2	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

### Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)				
20-90	138-621	3/8" Male Flare Fitting	1.00				


### **CAD Drawings**


Additional Features


2D	Revit	KLC		
•	•	•		

MARNING:







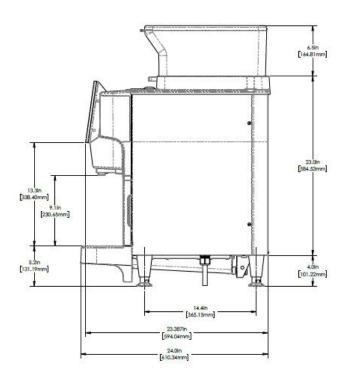

	Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	33.5 in.	16.8 in.	24.4 in.	49.8 in.	27.5 in.	23.5 in.	181.000 lbs	18.606 ft <sup>3</sup>	
Metric	85.1 cm	42.7 cm	62.0 cm	126.4 cm	69.9 cm	59.7 cm	82.102 kgs	0.527 m³	



## Related Products & Accessories: FAST CUP W/ BUNNLINK WIFI(55400.0100)











# Serving & Holding Options: FAST CUP W/ BUNNLINK WIFI(55400.0100)

\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*

