

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

P-SERIES TOP MOUNT WARMING CABINET

PH1 Solid Half-Door Pass-Thru Warming Cabinet

MODEL: PH1-1HS-PT



3 Year Parts / Labor Warranty

CABINET CONSTRUCTION

- Exterior stainless steel front and side (galvanized top,back and
- · Interior is made of corrosion resistant aluminum
- Stainless steel interior door liner
- · Full electronic control
- 22 Gauge stainless steel door
- Heavy-duty cylinder locks
- · Operational indicator panel contains thermometer and adjustable thermostat control which is accurately calibrated from 80°F to 180°F
- Manually controlled humidity vents are provided in the top of the cabinet
- Self-closing doors with 120° hold open feature, with cam-lift hinges
- Three (3) silver freeze shelves
- One-piece, snap-in magnetic door gasket
- · Hinged front shroud
- Proximity door switch activates interior incandescent lighting
- 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- · Pan slides
- 3" or 6" Casters
- · Left or right door hinge (at time of order)

ELECTRICAL SYSTEM

- 15 AMP breaker required for Single Door units
- Strip type 750-watt heating elements, operating on 208-240/60/1, having a total of 1500 watts per compartment
- · Externally mounted blower system maintains even temperature through out the food zone area
















MODEL	PH1-1HS-PT	
EXTERNAL DIMENSIONAL DATA		
Width Overall	26 ½"	
Depth Overall with Handle	38 1/4"	
Height Overall	84 ½"	
Number of Doors	4	
Depth with Door Open 90°	83 1/8"	
Door Opening (in)	(2) 21 ½" x 24 ¾"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	21.01	
Internal Width Overall (in)	22 ½"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	56 %"	
Number of Shelves	3	
ELECTRICAL DATA		
Amps	5.9 / 6.8	
Cabinet Voltage 208-240/60/1	208-240/60/1	
Heater Watts per Section (@240V)	1500	
SHIPPING DATA		
Gross Weight - Crated	450 lbs	
Height - Crated	92"	
Width - Crated	45"	
Depth - Crated	45"	

Top Mount Pass-Thru Warming Cabinet

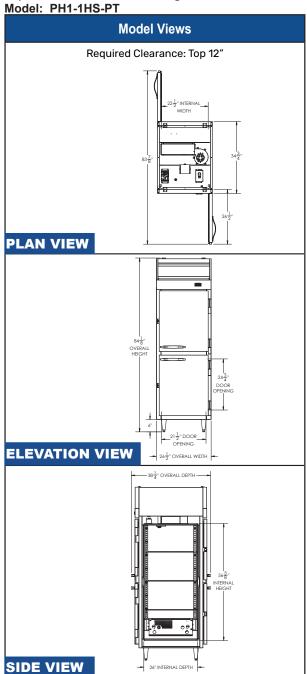

















208-240/60/1 Unit pre-wired at factory NEMA 6-20P and include 8' long cord and plug set.



