BE	VERAGE-AIR.
----	-------------

P-SFRIES TOP MOUNT PASS-THRU REFR	CEDATAB
P-ACKICA TUP WIUUNT PAAA-TUKU KECK	MICKALUK

PRD3HC Half-Glass Door Pass-Thru **Hydrocarbon Series**



Additional 4 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior stainless steel front and side (galvanized top, bottom & back)
- · Interior is made of corrosion resistant aluminum
- Full electronic control
- Expansion valve technology
- · Variable speed compressor technology
- · Self-closing doors with 120° stay-open feature
- · Glass-half door
- · LED interior light
- Cylinder locks
- · Snap-in magnetic gaskets for positive door seal
- Hinged front shroud
- · Energy saving thermal breaker
- Stainless steel breaker caps
- · Nine (9) heavy-duty epoxy wire coated shelves
- 6" High adjustable stainless steel legs
- · 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- · Stainless steel interior
- Additional shelves
- Shelf clips
- 3" or 6" Casters
- · 6" Seismic legs
- Tray slides (type A & A/C)
- Door swing orientation (at time of order)
- · Remote option (see note back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- · Adaptive defrost
- Epoxy coated evaporator coil, located out of the food zone
- Refrigerator capable of maintaining product temperature 36°F to 38°F


















3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	PRD3HC-1BHG	
EXTERNAL DIMENSIONAL DATA		
Width Overall	77 ¾"	
Depth Overall with Handles	36"	
Height Overall	84 1/8"	
Number of Doors	12	
Depth with Door Open 90°	83 ½"	
Door Opening (in)	21 ½" x 25 ¼"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	73.99	
Internal Width Overall (in)	73 ¾"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	56 ½"	
No. of Shelves	9	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	10.8	
REFRIGERATION DATA		
Horsepower	(2) 1/3	
Capacity (BTU/Hr)	5600	
Heat Rejection (BTU/Hr)	8400	
Charge (lbs/grams)	0.2866/130	
WEIGHT DATA		
Gross Weight (crated lbs)	950 lbs	
Height - Crated	88"	
Width - Crated	87"	
Depth - Crated	45"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Top Mount Refrigerator: Pass-Thru Model: PRD3HC-1BHG

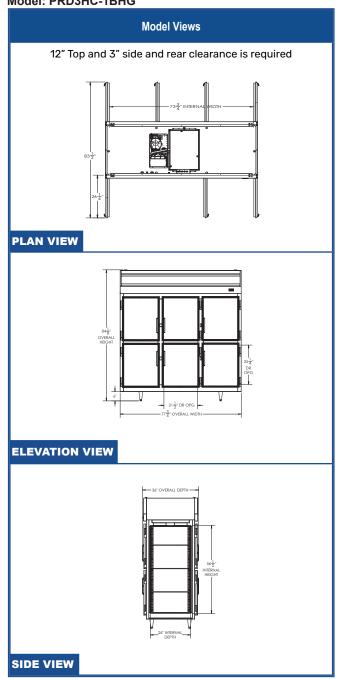



















Units pre-wired at factory and include 8' long cord



