

BISON

REFRIGERATION
www.BisonRefrigeration.com



Now In  AutoQuotes

S/S Reach Ins



Undercounters



Sandwich Units



Pizza Units



Merchandisers



Countertop Refrigerators & Freezers



Bison X



Warranty

Parts and Labor

**2 YEAR
WARRANTY**

Compressor

**5 YEAR
WARRANTY**

2 Year Warranty Applies to Units
Manufactured After 10-1-18

Parts and Labor

**1 YEAR
WARRANTY**

Compressor

**5 YEAR
WARRANTY**

1 Year Warranty Applies to Units
Manufactured Prior To 10-1-18

Index

S/S Reach Ins



p. 4-15

Undercounters



p. 16-29

Sandwich Units



p. 30-45

Pizza Units



p. 46-51

Merchandisers



p. 52-67

Countertop Refrigerators & Freezers



p. 68-77

Bison X



p. 78-85

1 Door Stainless Reach-In Cooler



BRR-21

Features

Stainless Steel Interior and Exterior

High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit. Also includes incandescent interior lighting.

Bottom Mounted Compressor

Allows for easier access while loading and unloading. This compressor location is ideal rather than top mounted style due to the temperature difference between the bottom and top of a room. Also allows easier access for maintenance and cleaning.

Self Closing Locking Door(s)

Self closing locking door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The locking door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Digital Temperature Controls

The LCD display allows for temperature control and easy visual read out.

3 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets to allow for height adjustments shelf by shelf to accommodate different sized products.

4 Casters

They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	27" x 31.5" x 83.25"
Interior Dimensions (Inches)	22" x 27" x 58"
Packaging Dimensions (Inches)	28.7" x 33.1" x 88.5"
Capacity (cu. ft.)	21 cu. ft.
Gross Weight (lbs)	254 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	60
# of Doors	1
# of Shelves	3
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

Cooling


Temperature Range	33° ~ 40° F
Refrigerant	R290
Refrigerant Amount (oz)	9.2
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Digital
Compressor H/P	1/4

Electrical


Voltage (v/Hz)	115/60
Power (W)	365
Power Consumption (kw/24hr)	2
Phase	1

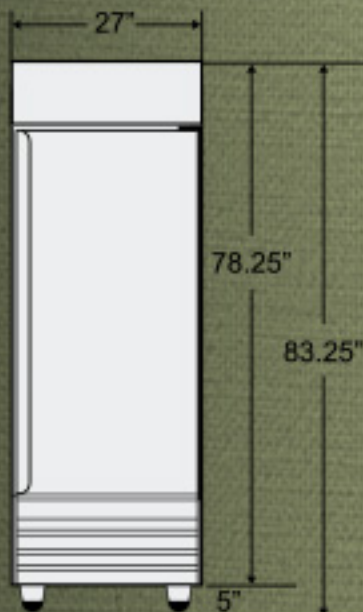

Front View

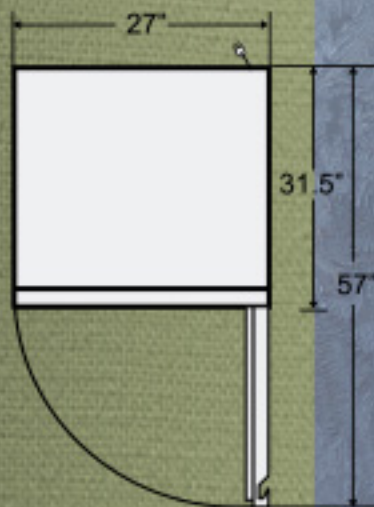

Top View

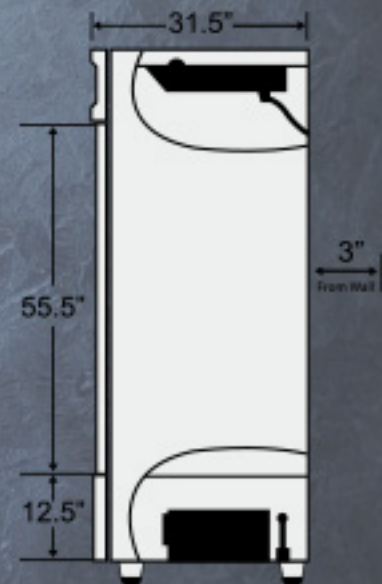

Side View



NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

1 Door Stainless Reach-In Freezer



BRF-21

Features

Stainless Steel Interior and Exterior

High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit. Also includes incandescent interior lighting.

Bottom Mounted Compressor

Allows for easier access while loading and unloading. This compressor location is ideal rather than top mounted style due to the temperature difference between the bottom and top of a room. Also allows easier access for maintenance and cleaning.

Self Closing Locking Door(s)

Self closing locking door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The locking door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Digital Temperature Controls

The LCD display allows for temperature control and easy visual read out.

3 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets to allow for height adjustments shelf by shelf to accommodate different sized products.

4 Casters

They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	27" x 31.5" x 83.25"
Interior Dimensions (Inches)	22" x 27" x 58"
Packaging Dimensions (Inches)	28.7" x 33.1" x 88.5"
Capacity (cu. ft.)	21 cu. ft.
Gross Weight (lbs)	265 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	60
# of Doors	1
# of Shelves	3
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

Cooling


Temperature Range	-8° ~ -1° F
Refrigerant	R290
Refrigerant Amount (oz)	13.4
Maximum Ambient Temperature Rating	90° F
Defrost Method	Electric Defrost
Defrost Power (W)	630
Cooling Method	Ventilated
Temperature Controller	Digital
Compressor H/P	1/2

Electrical


Voltage (v/Hz)	115/60
Power (W)	650
Power Consumption (kw/24hr)	6.2
Phase	1

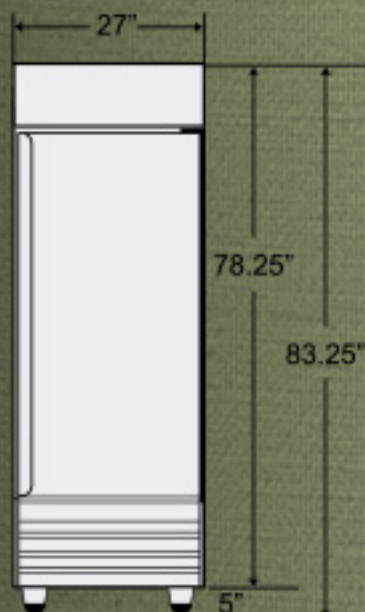

Front View

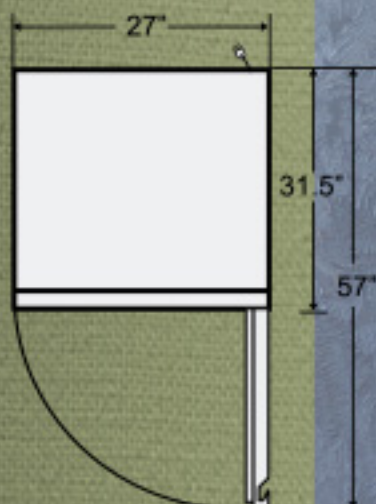

Top View

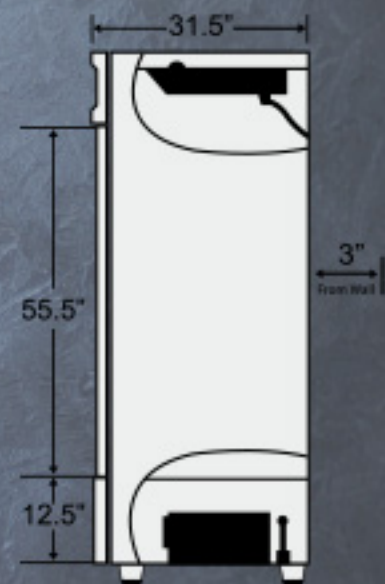

Side View



NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

2 Door Stainless Reach-In Cooler



BRR-46

Features

Stainless Steel Interior and Exterior

High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit. Also includes incandescent interior lighting.

Bottom Mounted Compressor

Allows for easier access while loading and unloading. This compressor location is ideal rather than top mounted style due to the temperature difference between the bottom and top of a room. Also allows easier access for maintenance and cleaning.

Self Closing Locking Door(s)

Self closing locking door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The locking door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Digital Temperature Controls

The LCD display allows for temperature control and easy visual read out.

6 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets to allow for height adjustments shelf by shelf to accommodate different sized products.

4 Casters

They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	54.5" x 31.5" x 83.25"
Interior Dimensions (Inches)	50" x 27" x 58"
Packaging Dimensions (Inches)	56.1" x 33.1" x 88.5"
Capacity (cu. ft.)	46 cu. ft.
Gross Weight (lbs)	397 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	60
# of Doors	2
# of Shelves	6
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

Cooling

Temperature Range	33° ~ 40° F
Refrigerant	R290
Refrigerant Amount (oz)	13.4
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Digital
Compressor H/P	1/3

Electrical

Voltage (v/Hz)	115/60
Power (W)	590
Power Consumption (kw/24hr)	2.3
Phase	1

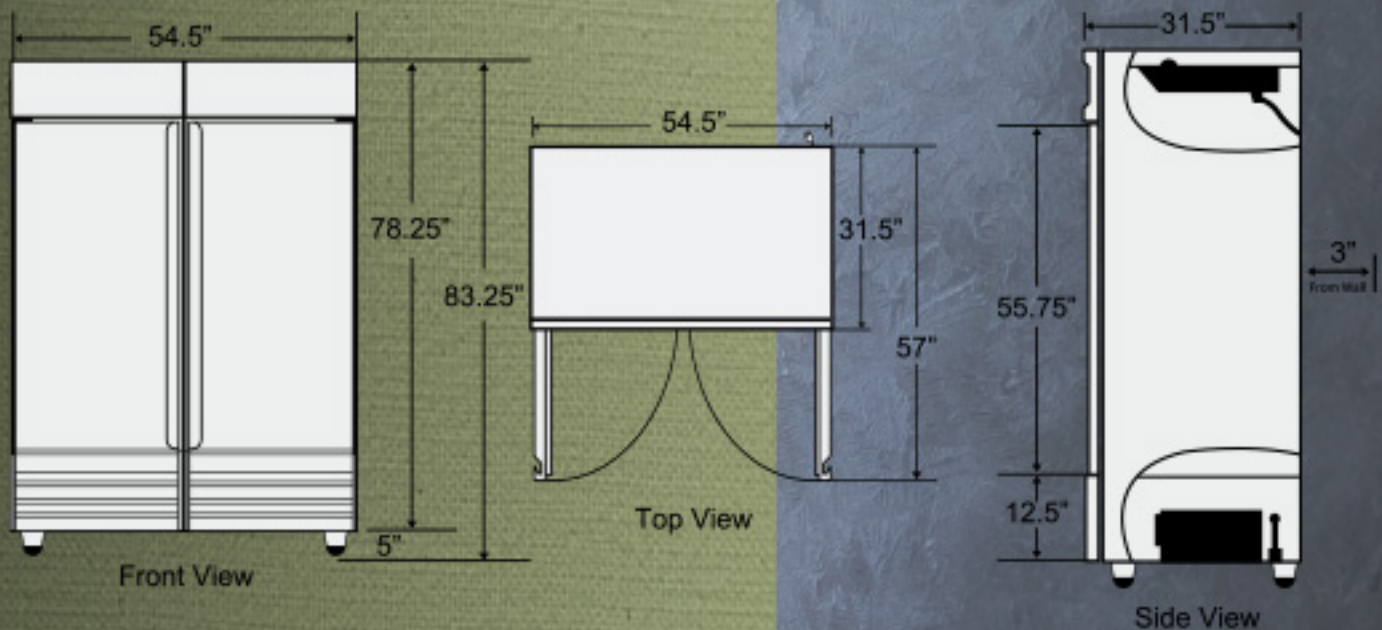

NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

2 Door Stainless Reach-In Freezer



BRF-46

Features

Stainless Steel Interior and Exterior

High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit. Also includes incandescent interior lighting.

Bottom Mounted Compressor

Allows for easier access while loading and unloading. This compressor location is ideal rather than top mounted style due to the temperature difference between the bottom and top of a room. Also allows easier access for maintenance and cleaning.

Self Closing Locking Door(s)

Self closing locking door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The locking door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Digital Temperature Controls

The LCD display allows for temperature control and easy visual read out.

6 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets to allow for height adjustments shelf by shelf to accommodate different sized products.

4 Casters

They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	54.5" x 31.5" x 83.25"
Interior Dimensions (Inches)	50" x 27" x 58"
Packaging Dimensions (Inches)	56.1" x 33.1" x 88.5"
Capacity (cu. ft.)	46 cu. ft.
Gross Weight (lbs)	419 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	60
# of Doors	2
# of Shelves	6
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

Cooling

Temperature Range	-8° ~ -1° F
Refrigerant	R290
Refrigerant Amount (oz)	19.4
Maximum Ambient Temperature Rating	90° F
Defrost Method	Electric Defrost
Defrost Power (W)	800
Cooling Method	Ventilated
Temperature Controller	Digital
Compressor H/P	3/4

Electrical

Voltage (v/Hz)	115/60
Power (W)	1170
Power Consumption (kw/24hr)	10
Phase	1

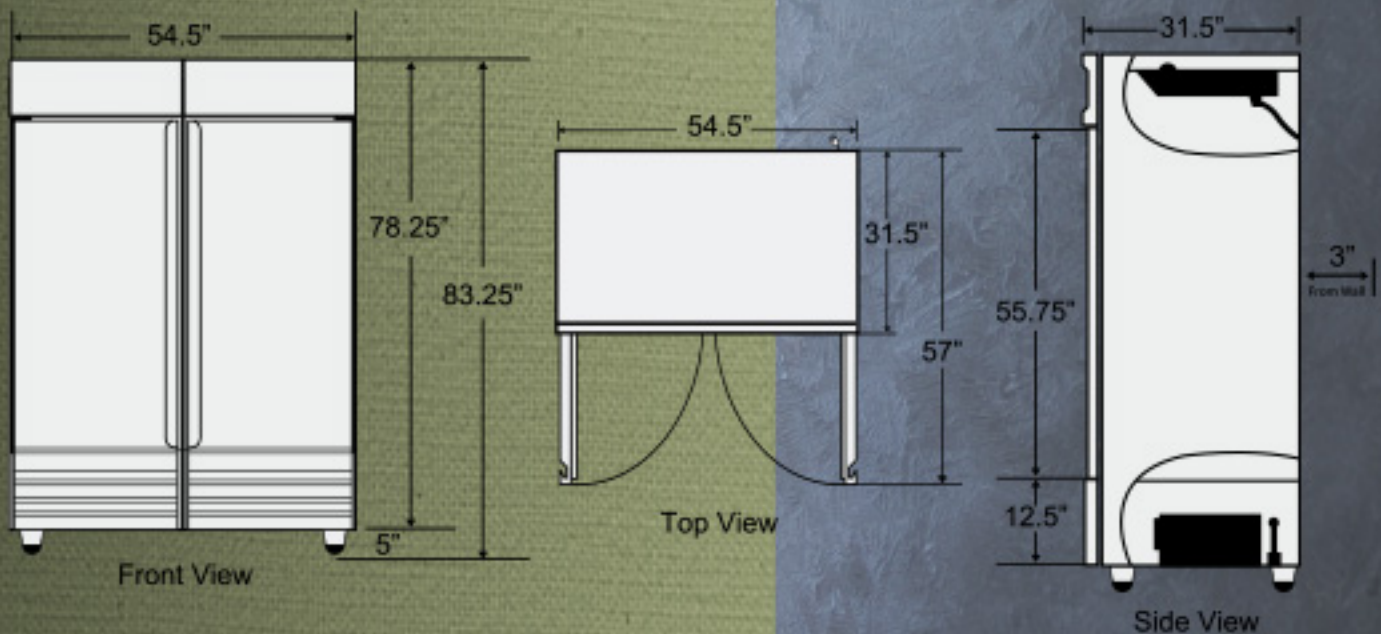

NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

3 Door Stainless Reach-In Cooler



BRR-71

Features

Stainless Steel Interior and Exterior

High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit. Also includes incandescent interior lighting.

Bottom Mounted Compressor

Allows for easier access while loading and unloading. This compressor location is ideal rather than top mounted style due to the temperature difference between the bottom and top of a room. Also allows easier access for maintenance and cleaning.

Self Closing Locking Door(s)

Self closing locking door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The locking door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Digital Temperature Controls

The LCD display allows for temperature control and easy visual read out.

9 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets to allow for height adjustments shelf by shelf to accommodate different sized products.

6 Casters

They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	82" x 31.75" x 83.25"
Interior Dimensions (Inches)	77" x 27" x 58"
Packaging Dimensions (Inches)	83.7" x 33.1" x 88.5"
Capacity (cu. ft.)	71 cu. ft.
Gross Weight (lbs)	617 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	60
# of Doors	3
# of Shelves	9
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

Cooling


Temperature Range	33° ~ 40° F
Refrigerant	R290
Refrigerant Amount (oz)	19.7
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Digital
Compressor H/P	1/2

Electrical


Voltage (v/Hz)	115/60
Power (W)	650
Power Consumption (kw/24hr)	3.4
Phase	1

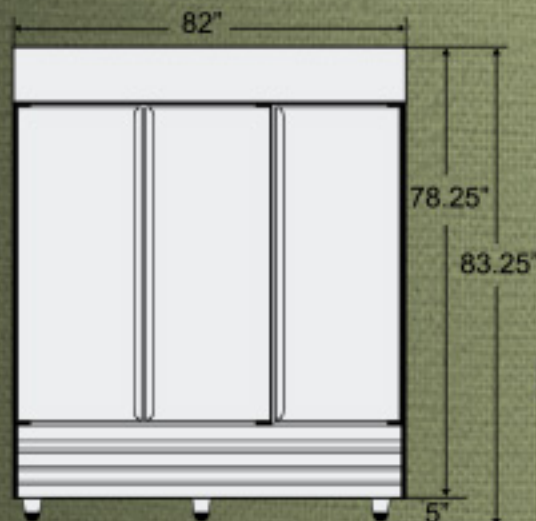

Front View

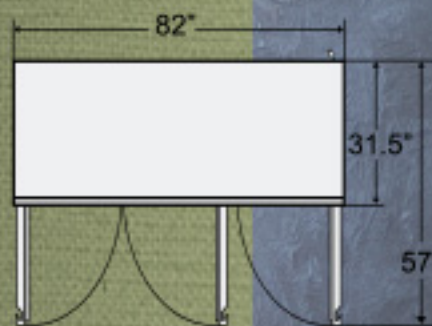

Top View

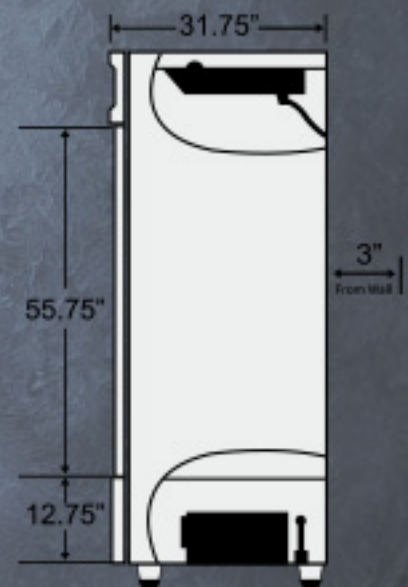

Side View



NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

3 Door Stainless Reach-In Freezer

Features

Stainless Steel Interior and Exterior

High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit. Also includes incandescent interior lighting.

Bottom Mounted Compressor

Allows for easier access while loading and unloading. This compressor location is ideal rather than top mounted style due to the temperature difference between the bottom and top of a room. Also allows easier access for maintenance and cleaning.

Self Closing Locking Door(s)

Self closing locking door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The locking door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Digital Temperature Controls

The LCD display allows for temperature control and easy visual read out.

9 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets to allow for height adjustments shelf by shelf to accommodate different sized products.

6 Casters

They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.



BRF-71

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	82" x 31.75" x 83.25"
Interior Dimensions (Inches)	77" x 27" x 58"
Packaging Dimensions (Inches)	83.7" x 33.1" x 88.5"
Capacity (cu. ft.)	71 cu. ft.
Gross Weight (lbs)	617 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	60
# of Doors	3
# of Shelves	9
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

Cooling

Temperature Range	-8° ~ -1° F
Refrigerant	R-404A
Refrigerant Amount (oz)	25.4
Maximum Ambient Temperature Rating	100.4° F
Defrost Method	Electric Defrost
Defrost Power (W)	1100
Cooling Method	Ventilated
Temperature Controller	Digital
Compressor H/P	1-1/4

Electrical

Voltage (v/Hz)	220/60
Power (W)	1200
Power Consumption (kw/24hr)	14.4
Phase	1

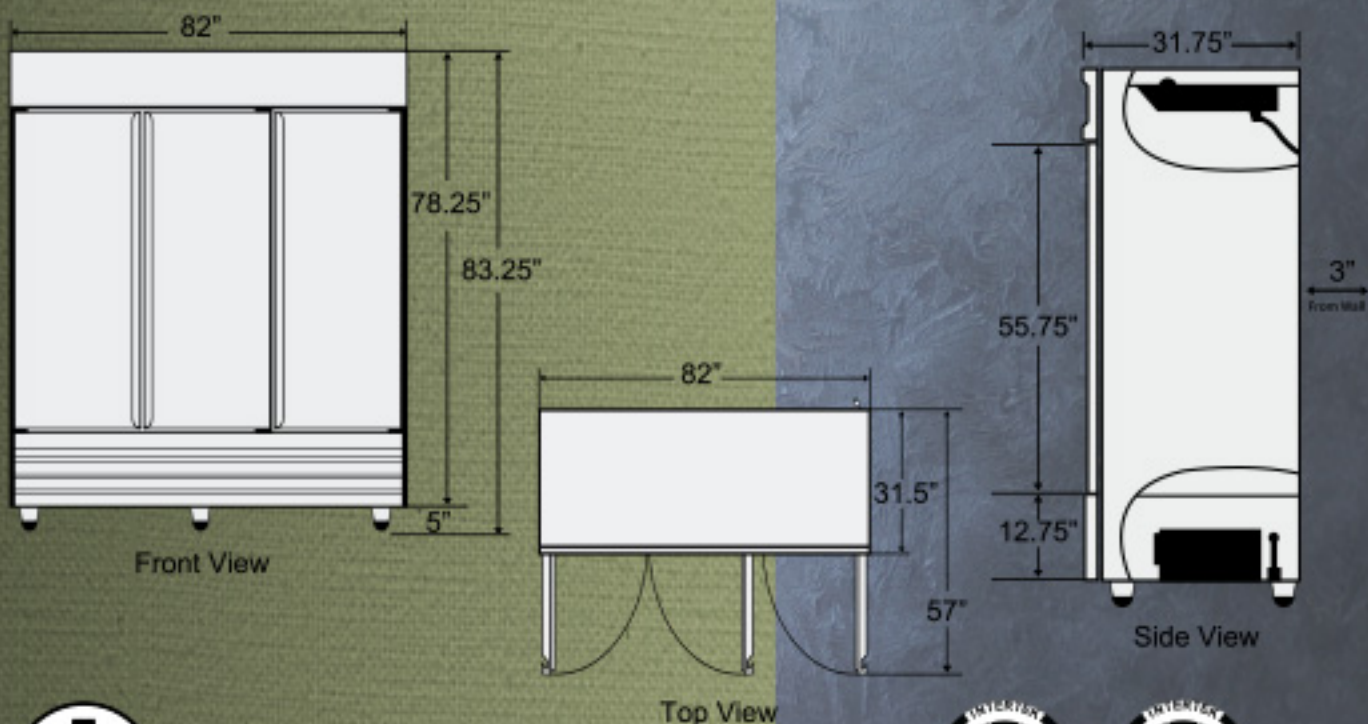

NEMA 14-20P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

1 Door Undercounter Cooler



BUR-27

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

1 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	27.5" x 30" x 37.25"
Interior Dimensions (Inches)	24" x 24" x 24"
Packaging Dimensions (Inches)	30.2" x 33.5" x 37.7"
Capacity (cu. ft.)	6.5 cu. ft.
Gross Weight (lbs)	188 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	1
# of Shelves	1
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

Cooling


Temperature Range	33° ~ 40° F
Refrigerant	R290
Refrigerant Amount (oz)	9.2
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Thermostat
Compressor H/P	1/4

Electrical


Voltage (v/Hz)	115/60
Power (W)	260
Power Consumption (kw/24hr)	1.2
Phase	1

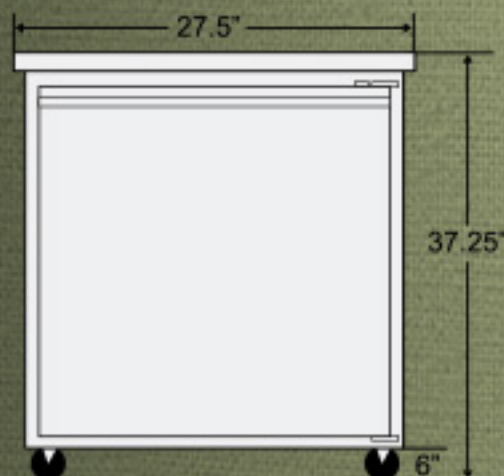

Front View

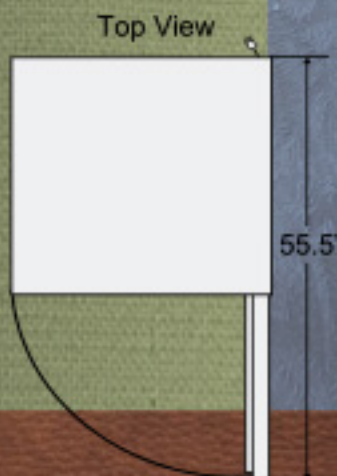

Top View

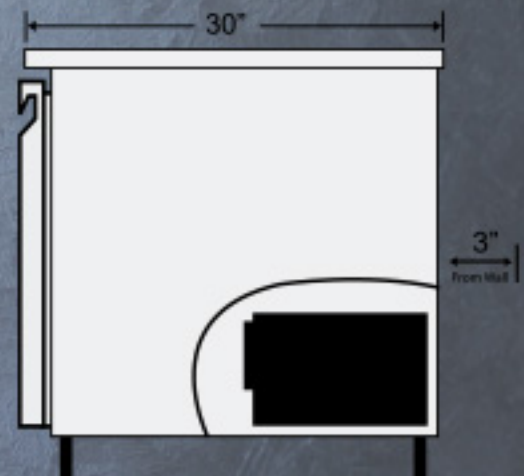

Side View



NEMA 5-15



COMPLIES WITH ANSI/NSF 7 FOR FOOD SERVICE

1 Door Undercounter Freezer



BUF-27

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

1 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	27.5" x 30" x 37.25"
Interior Dimensions (Inches)	24" x 24" x 24"
Packaging Dimensions (Inches)	30.2" x 33.5" x 37.7"
Capacity (cu. ft.)	6.5 cu. ft.
Gross Weight (lbs)	188 lbs

Construction




Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	1
# of Shelves	1
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

Cooling

Temperature Range	-8° ~ -1° F
Refrigerant	R290
Refrigerant Amount (oz)	12.3
Maximum Ambient Temperature Rating	90° F
Defrost Method	Electric Defrost
Defrost Power (W)	410
Cooling Method	Ventilated
Temperature Controller	Thermostat
Compressor H/P	1/4

Electrical

Voltage (v/Hz)	115/60
Power (W)	350
Power Consumption (kw/24hr)	3.1
Phase	1

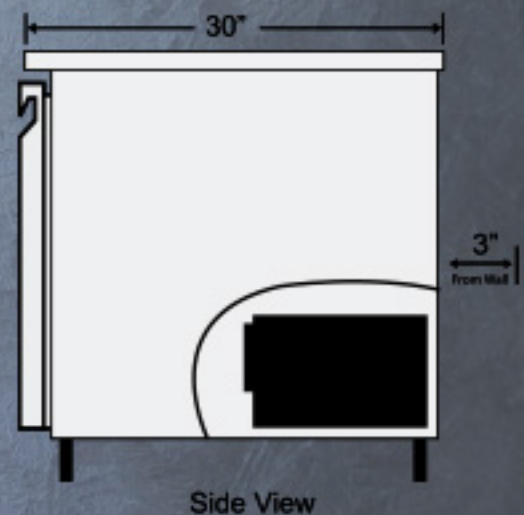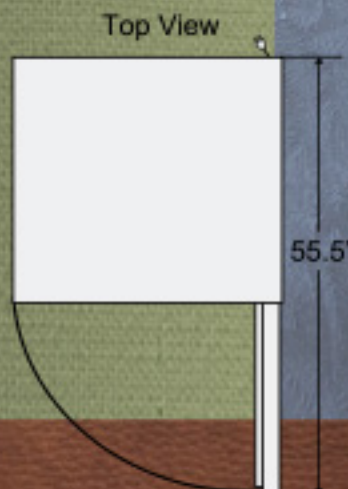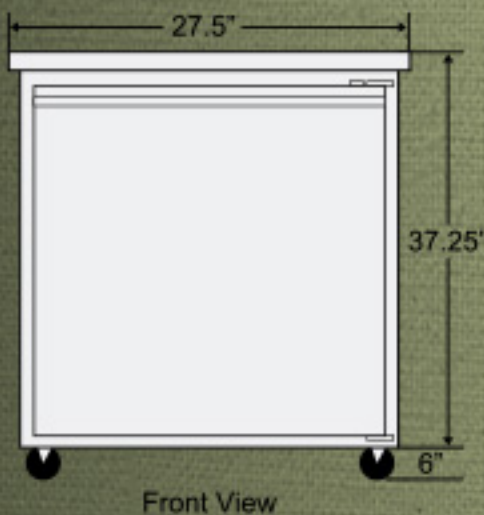

NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

2 Door Undercounter Cooler

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

2 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.



BUR-48

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	48.125" x 30" x 37.125"
Interior Dimensions (Inches)	45" x 24" x 24"
Packaging Dimensions (Inches)	51" x 33.5" x 37.7"
Capacity (cu. ft.)	12 cu. ft.
Gross Weight (lbs)	232 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	2
# of Shelves	2
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

Cooling


Temperature Range	33° ~ 40° F
Refrigerant	R290
Refrigerant Amount (oz)	11.6
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Thermostat
Compressor H/P	1/3

Electrical


Voltage (v/Hz)	115/60
Power (W)	390
Power Consumption (kw/24hr)	1.7
Phase	1

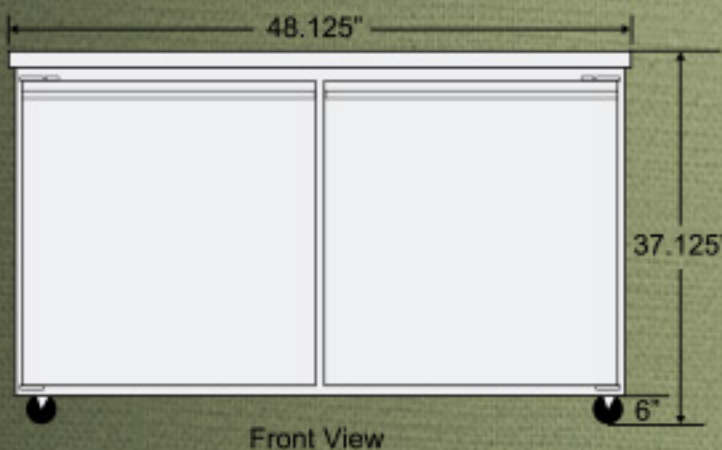

Front View

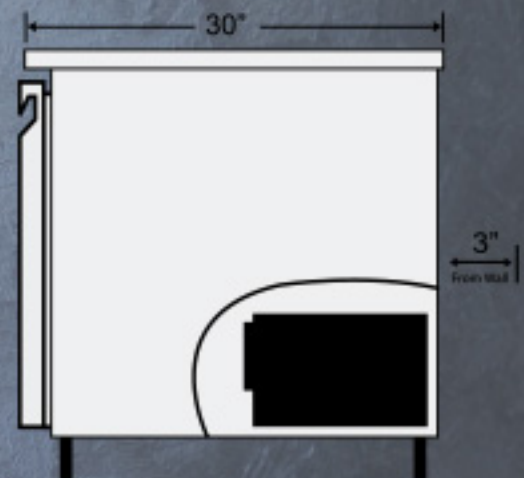

Side View

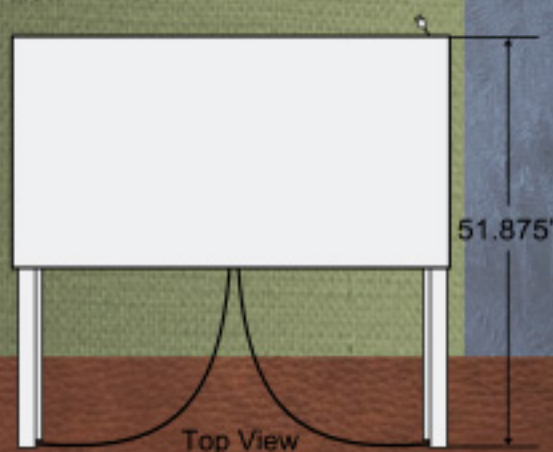

Top View



NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

2 Door Undercounter Freezer

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

2 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.



BUF-48

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	48.125" x 30" x 37.125"
Interior Dimensions (Inches)	45" x 24" x 24"
Packaging Dimensions (Inches)	51" x 33.5" x 37.7"
Capacity (cu. ft.)	12 cu. ft.
Gross Weight (lbs)	232 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	2
# of Shelves	2
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

Cooling


Temperature Range	-8° ~ -1° F
Refrigerant	R290
Refrigerant Amount (oz)	19.4
Maximum Ambient Temperature Rating	90° F
Defrost Method	Electric Defrost
Defrost Power (W)	500
Cooling Method	Ventilated
Temperature Controller	Thermostat
Compressor H/P	1/2

Electrical


Voltage (v/Hz)	115/60
Power (W)	600
Power Consumption (kw/24hr)	6
Phase	1

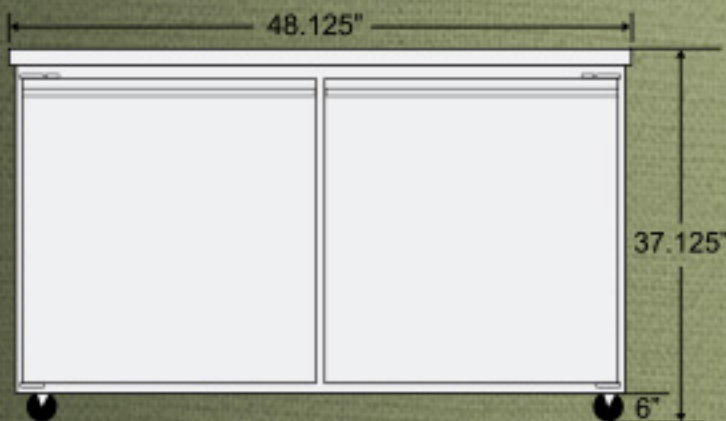

Front View

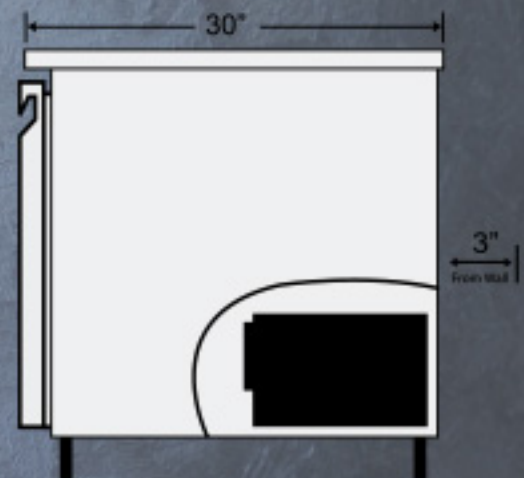

Side View

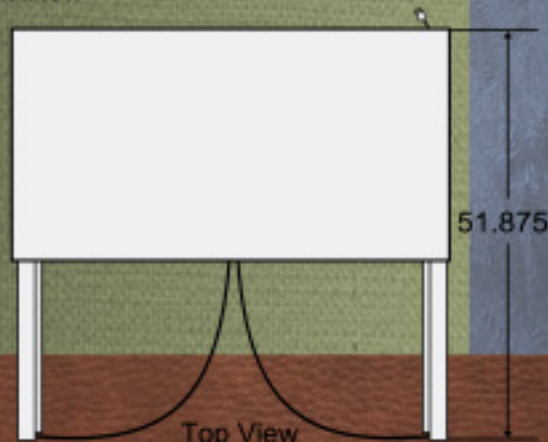

Top View



NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

2 Door Undercounter Cooler



BUR-60

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

2 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	60.25" x 30.125" x 37.125"
Interior Dimensions (Inches)	57" x 24" x 24"
Packaging Dimensions (Inches)	63" x 33.5" x 37.7"
Capacity (cu. ft.)	17.9 cu. ft.
Gross Weight (lbs)	287 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	2
# of Shelves	2
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

Cooling


Temperature Range	33° ~ 40° F
Refrigerant	R290
Refrigerant Amount (oz)	11.6
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Thermostat
Compressor H/P	1/3

Electrical


Voltage (v/Hz)	115/60
Power (W)	390
Power Consumption (kw/24hr)	1.7
Phase	1

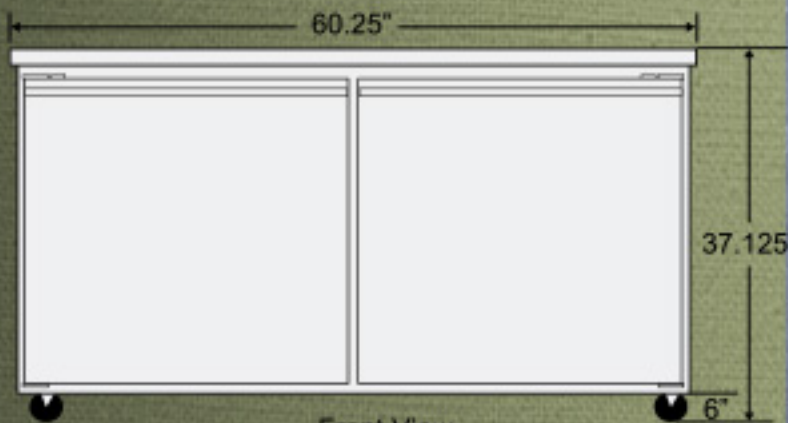

Front View

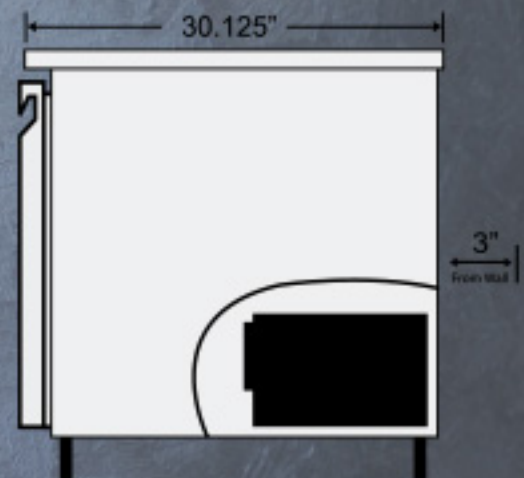

Side View

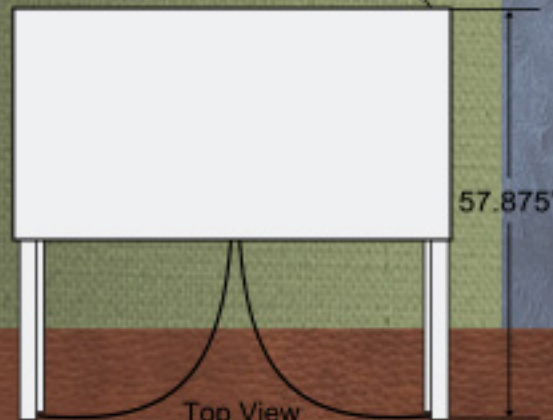

Top View



NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

2 Door Undercounter Freezer

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

2 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.



BUF-60

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	60.25" x 30.125" x 37.125"
Interior Dimensions (Inches)	57" x 24" x 24"
Packaging Dimensions (Inches)	63" x 33.5" x 37.7"
Capacity (cu. ft.)	17.9 cu. ft.
Gross Weight (lbs)	287 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	2
# of Shelves	2
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

Cooling


Temperature Range	-8° ~ -1° F
Refrigerant	R290
Refrigerant Amount (oz)	19.4
Maximum Ambient Temperature Rating	90° F
Defrost Method	Electric Defrost
Defrost Power (W)	500
Cooling Method	Ventilated
Temperature Controller	Thermostat
Compressor H/P	1/2

Electrical


Voltage (v/Hz)	115/60
Power (W)	600
Power Consumption (kw/24hr)	6
Phase	1

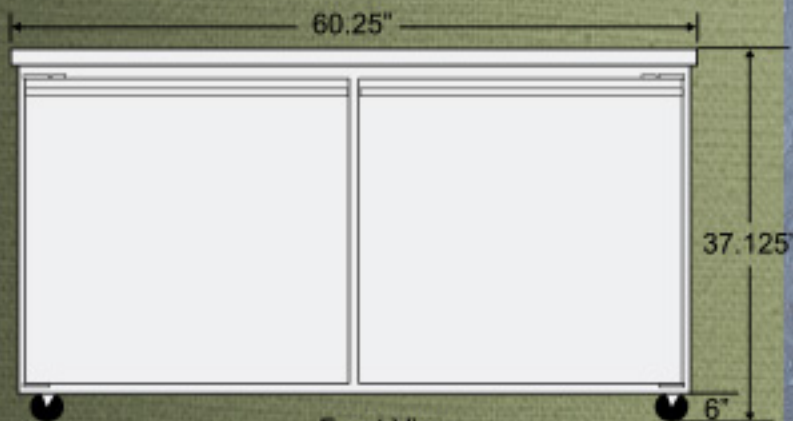

Front View

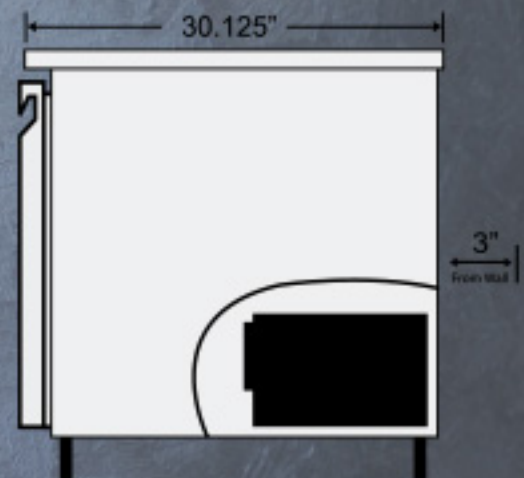

Side View

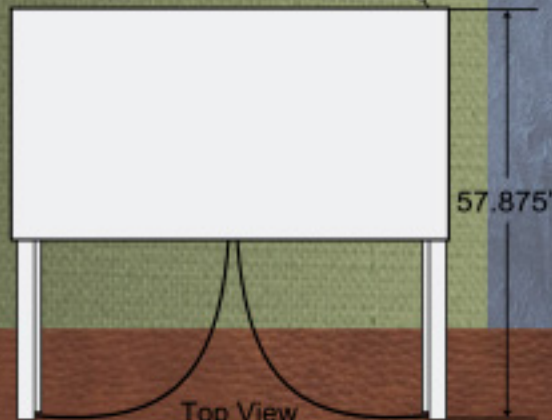

Top View



NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

3 Door Undercounter Cooler



BUR-72

Features

Stainless Steel Interior and Exterior

High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle

Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

3 Adjustable Interior Shelf

The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters

They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)

Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	72.75" x 30" x 37.25"
Interior Dimensions (Inches)	69" x 24" x 24"
Packaging Dimensions (Inches)	75.4" x 33.5" x 37.7"
Capacity (cu. ft.)	23 cu. ft.
Gross Weight (lbs)	353 lbs

Construction




Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	3
# of Shelves	3
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

Cooling

Temperature Range	33° ~ 40° F
Refrigerant	R290
Refrigerant Amount (oz)	11.6
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	500
Cooling Method	Ventilated
Temperature Controller	Thermostat
Compressor H/P	1/3

Electrical

Voltage (v/Hz)	115/60
Power (W)	390
Power Consumption (kw/24hr)	1.7
Phase	1

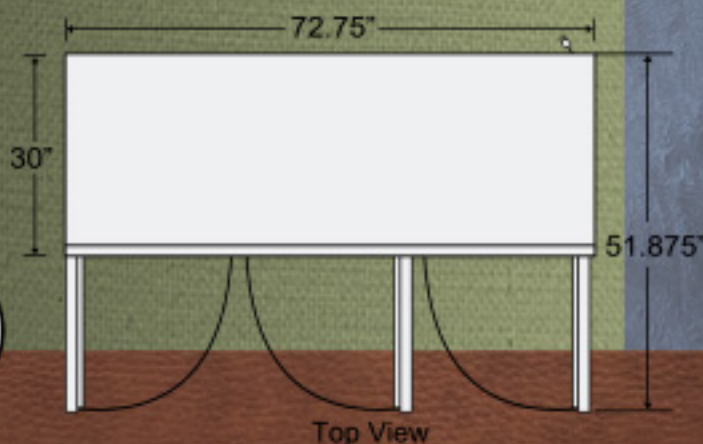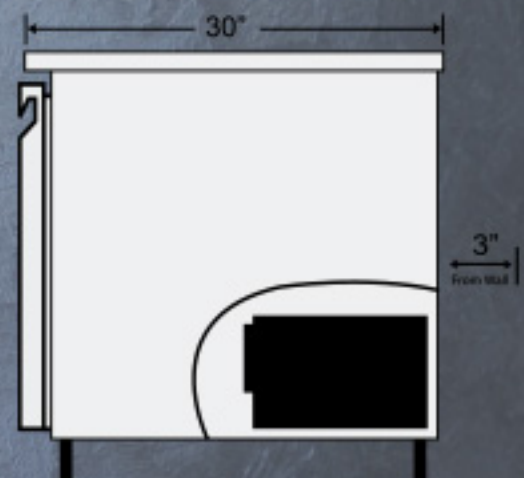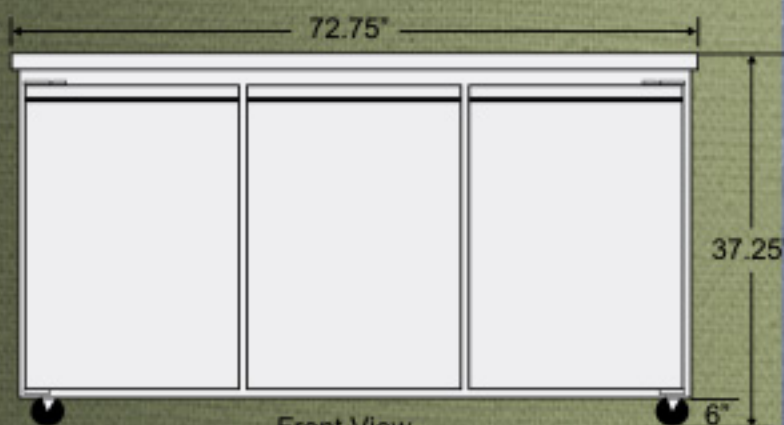

NEMA 5-15



C



US

COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

1 Door Sandwich Unit



BST-27

Features

Stainless Steel Interior and Exterior

High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle

Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

1 Adjustable Interior Shelf

The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters

They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)

Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

*Does not include pans.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	27.5" x 30" x 44.25"
Interior Dimensions (Inches)	24" x 24" x 24"
Packaging Dimensions (Inches)	30.2" x 33.5" x 45.9"
Capacity (cu. ft.)	6.5 cu. ft.
Gross Weight (lbs)	199 lbs

Construction

Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	1
# of Shelves	1
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs


*Does not include pans

Cooling

Temperature Range	33° ~ 40° F
Refrigerant	R290
Refrigerant Amount (oz)	9.2
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Thermostat
Compressor H/P	1/4

Electrical

Voltage (v/Hz)	115/60
Power (W)	390
Power Consumption (kw/24hr)	1.6
Phase	1

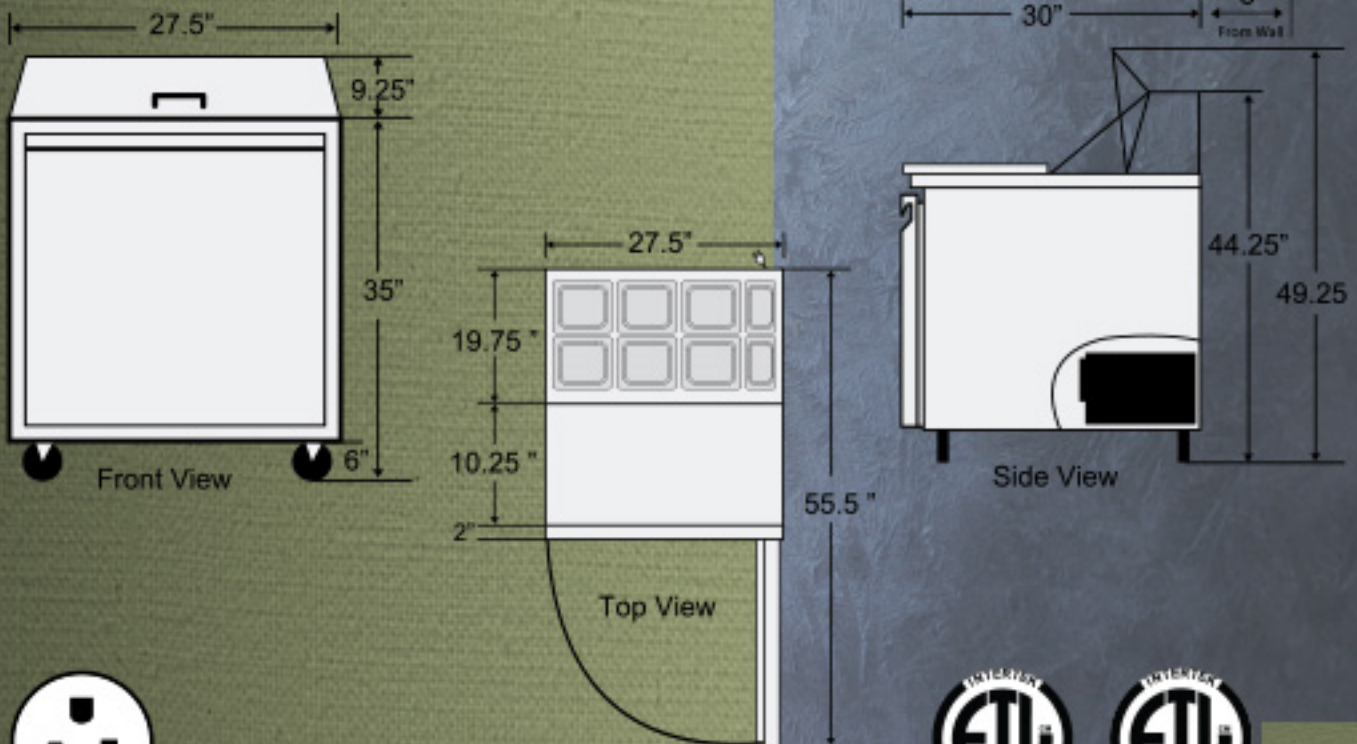

NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

1 Door Mega Top Sandwich Unit



BST-27-12

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

1 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

*Does not include pans.

Technical Data

Plan View




Dimensions

Exterior Dimensions (Inches)	27.5" x 34" x 47.125"
Interior Dimensions (Inches)	24" x 24" x 24"
Packaging Dimensions (Inches)	30.2" x 37.5" x 48.2"
Capacity (cu. ft.)	7.9 cu. ft.
Gross Weight (lbs)	221 lbs

Construction

Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	1
# of Shelves	1
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

*Does not include pans

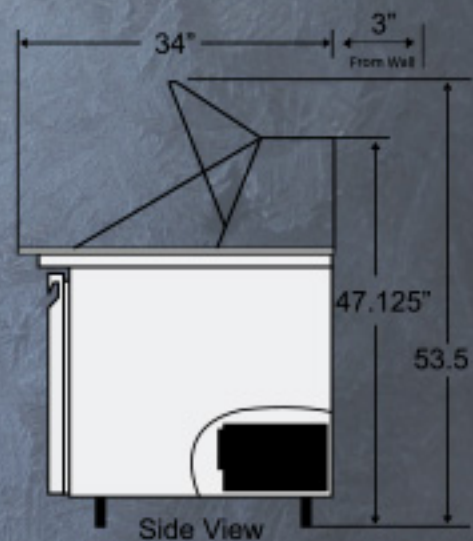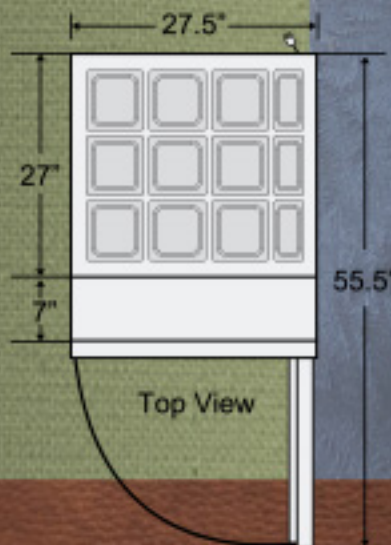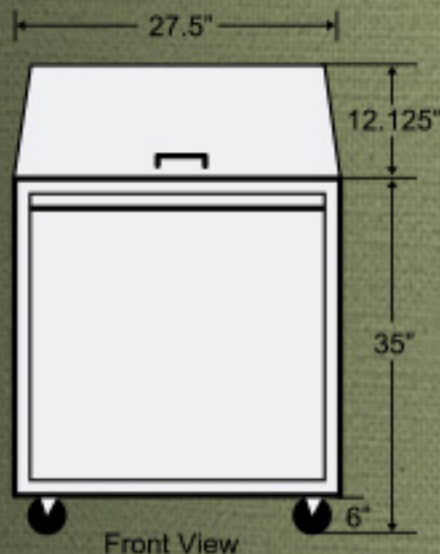

NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

2 Door Sandwich Unit



BST-48

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

2 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

*Does not include pans.

Technical Data

Plan View


Dimensions

Exterior Dimensions (Inches)	48.25" x 30.125" x 44.75"
Interior Dimensions Top (Inches)	42.5" x 21.5" x 8.5"
Interior Dimensions Bottom (Inches)	43" x 19.5" x 20"
Packaging Dimensions (Inches)	51" x 33.5" x 45.9"
Capacity (cu. ft.)	12 cu. ft.
Gross Weight (lbs)	242 lbs


Construction

Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	2
# of Shelves	2
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs


*Does not include pans

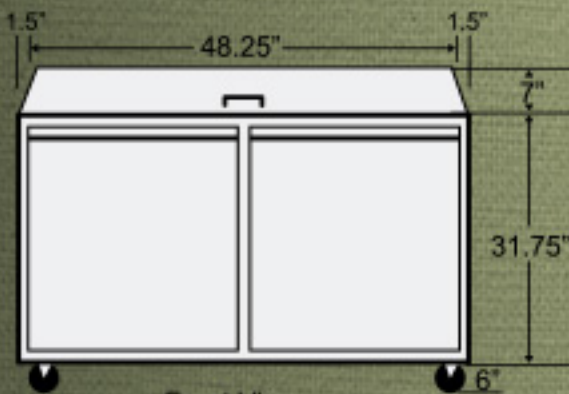

Front View

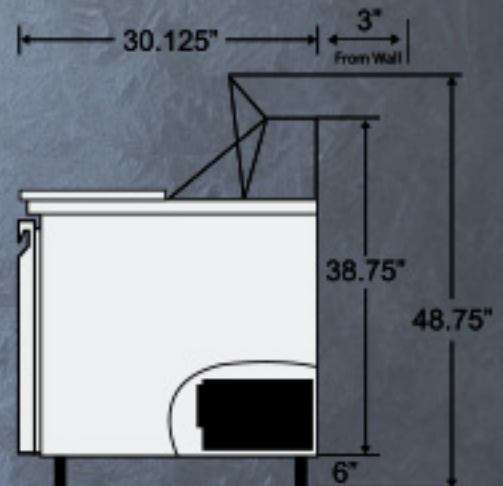

Side View

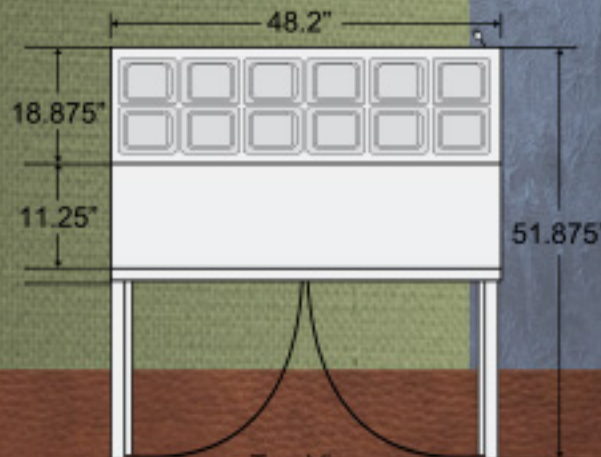

Top View



NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

2 Door Mega Top Sandwich Unit



BST-48-18

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

2 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

*Does not include pans.

Technical Data

Plan View


Dimensions

Exterior Dimensions (Inches)	48.25" x 34" x 47.25"
Interior Dimensions Top (Inches)	42.5" x 21.5" x 8.5"
Interior Dimensions Bottom (Inches)	43" x 19.5" x 20"
Packaging Dimensions (Inches)	51" x 37.5" x 48.2"
Capacity (cu. ft.)	14.7 cu. ft.
Gross Weight (lbs)	265 lbs


Construction

Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	2
# of Shelves	2
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs


*Does not include pans

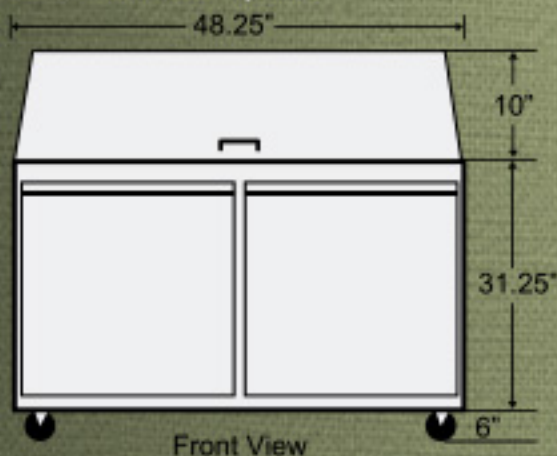

Front View

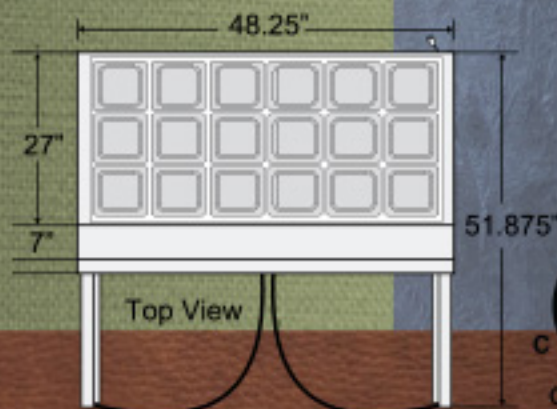

Top View

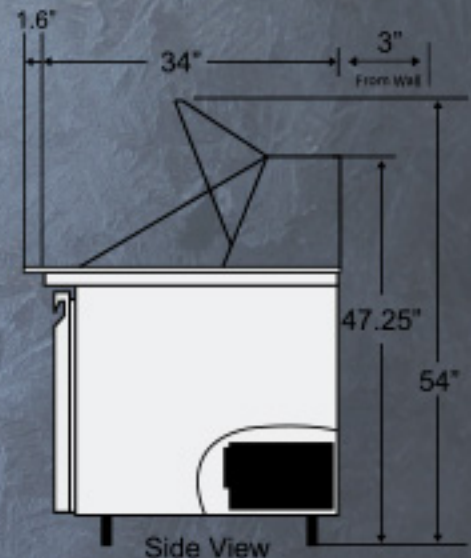

Side View

Cooling

Temperature Range	33° ~ 40° F
Refrigerant	R290
Refrigerant Amount (oz)	12.3
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Thermostat
Compressor H/P	1/3

Electrical

Voltage (v/Hz)	115/60
Power (W)	560
Power Consumption (kw/24hr)	2.2
Phase	1



NEMA 5-15



COMPLIES WITH ANSI/NSF 7 FOR FOOD SERVICE

2 Door Sandwich Unit

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

2 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

*Does not include pans .



BST-60

Technical Data

Plan View




Dimensions

Exterior Dimensions (Inches)	60.25" x 30" x 43.875"
Interior Dimensions Top (Inches)	53.5" x 12.75" x 7"
Interior Dimensions Bottom (Inches)	57" x 24" x 26"
Packaging Dimensions (Inches)	63" x 33.5" x 45.9"
Capacity (cu. ft.)	18.2 cu. ft.
Gross Weight (lbs)	331 lbs

Construction

Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	2
# of Shelves	2
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

*Does not include pans

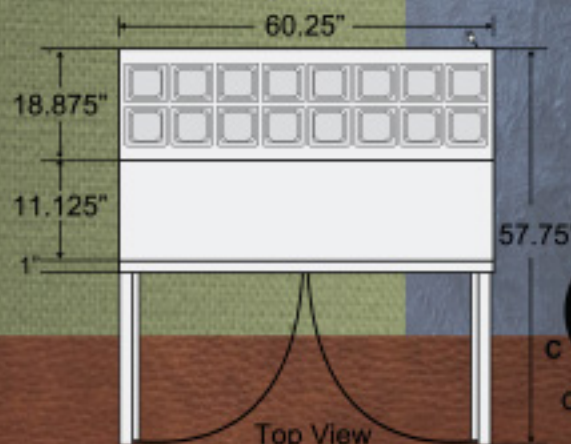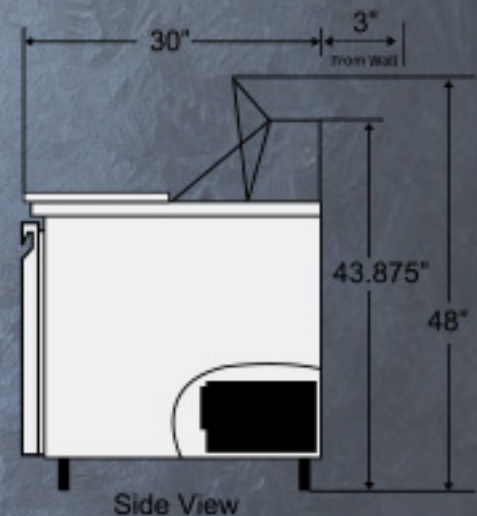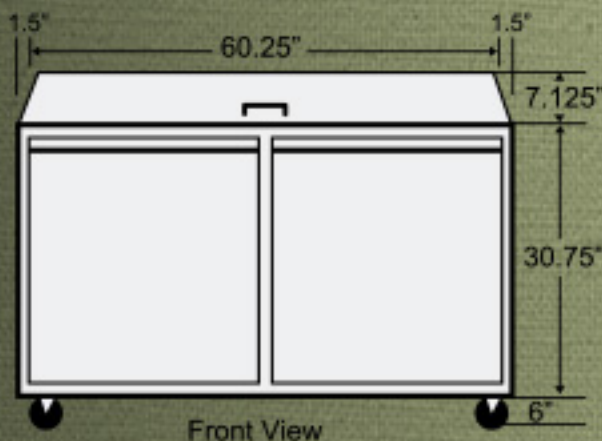

NEMA 5-15



COMPLIES WITH ANSI/NSF 7 FOR FOOD SERVICE

2 Door Mega Top Sandwich Unit



BST-60-24

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

2 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

*Does not include pans.

Technical Data

Plan View




Dimensions

Exterior Dimensions (Inches)	60.25" x 34" x 47.25"
Interior Dimensions Top (Inches)	54.75" x 20.5" x 10"
Interior Dimensions Bottom (Inches)	57" x 24" x 26"
Packaging Dimensions (Inches)	63" x 37.5" x 48.2"
Capacity (cu. ft.)	18.6 cu. ft.
Gross Weight (lbs)	353 lbs

Construction

Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	2
# of Shelves	2
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

*Does not include pans

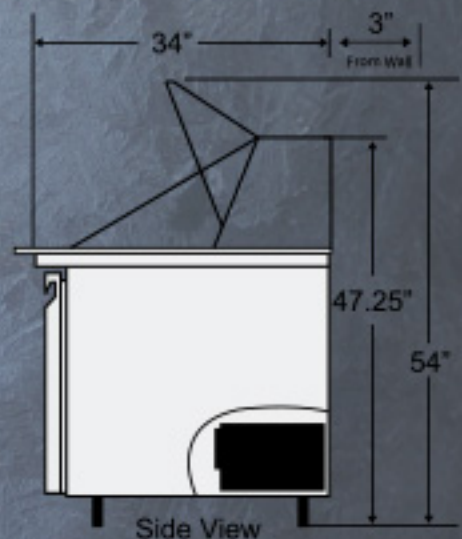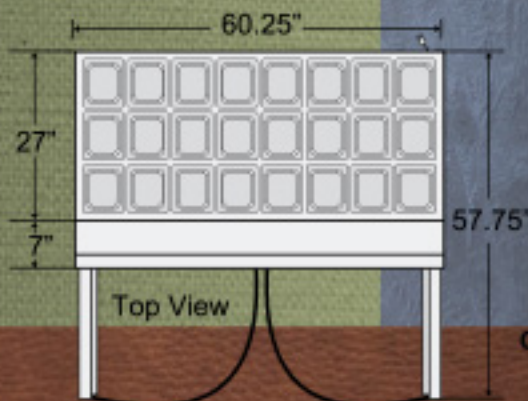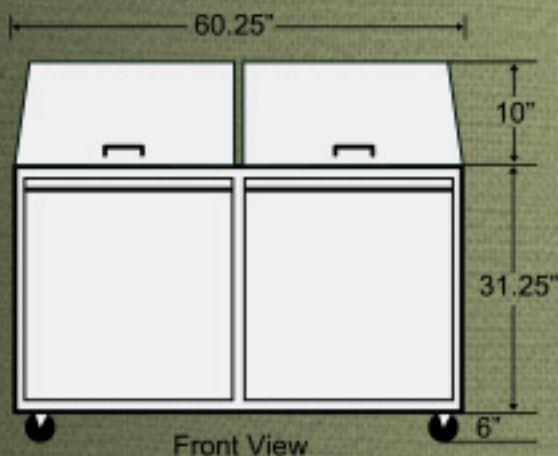

Cooling

Temperature Range	33° ~ 40° F
Refrigerant	R290
Refrigerant Amount (oz)	12.3
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Thermostat
Compressor H/P	1/2

Electrical

Voltage (v/Hz)	115/60
Power (W)	560
Power Consumption (kw/24hr)	2.2
Phase	1



NEMA 5-15



COMPLIES WITH ANSI/NSF 7 FOR FOOD SERVICE

3 Door Sandwich Unit

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

3 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

*Does not include pans.



BST-72

Technical Data

Plan View


Dimensions

Exterior Dimensions (Inches)	72.75" x 30" x 43.75"
Interior Dimensions Top (Inches)	66.25" x 12.75" x 7"
Interior Dimensions Bottom (Inches)	69" x 24" x 28"
Packaging Dimensions (Inches)	75.4" x 33.5" x 45.9"
Capacity (cu. ft.)	19 cu. ft.
Gross Weight (lbs)	375 lbs


Construction

Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	3
# of Shelves	3
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs


*Does not include pans

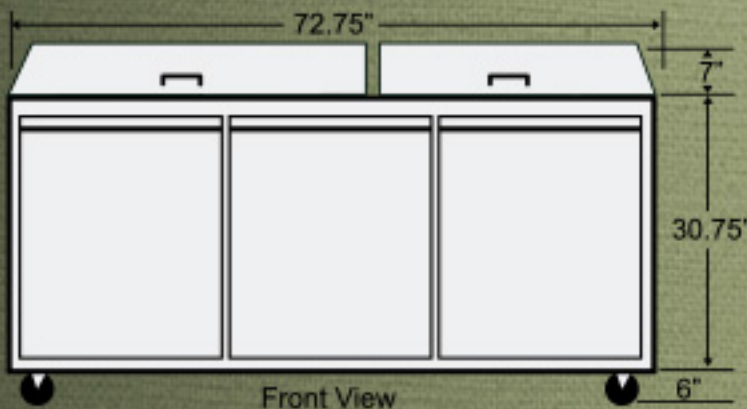

Front View

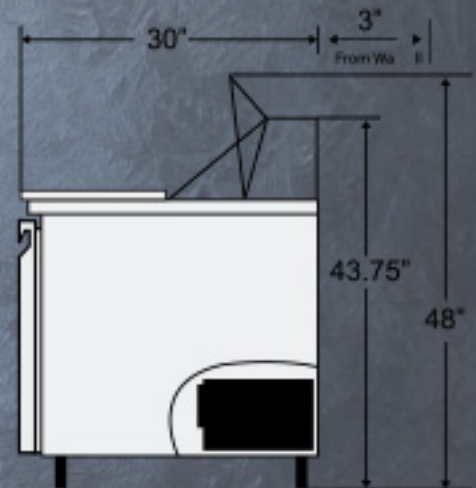

Side View

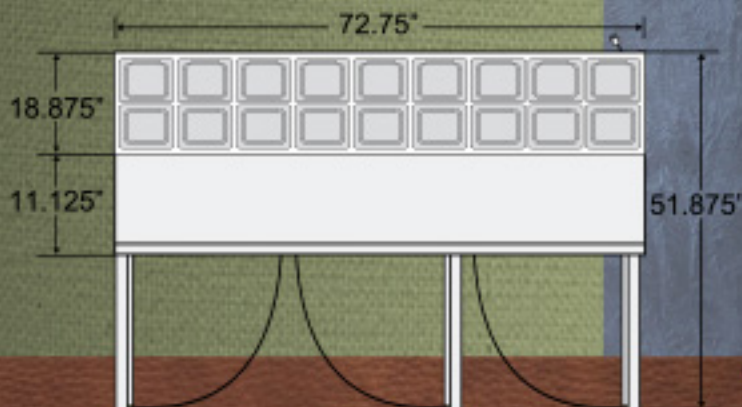

Top View



NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

3 Door Mega Top Sandwich Unit



BST-72-30

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

3 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

*Does not include pans.

Technical Data

Plan View




Dimensions

Exterior Dimensions (Inches)	72.75" x 34" x 47.25"
Interior Dimensions Top (Inches)	67.55" x 20.5" x 10"
Interior Dimensions Bottom (Inches)	69" x 24" x 28"
Packaging Dimensions (Inches)	75.4" x 37.5" x 48.2"
Capacity (cu. ft.)	22.6 cu. ft.
Gross Weight (lbs)	397 lbs

Construction

Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	3
# of Shelves	3
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

*Does not include pans

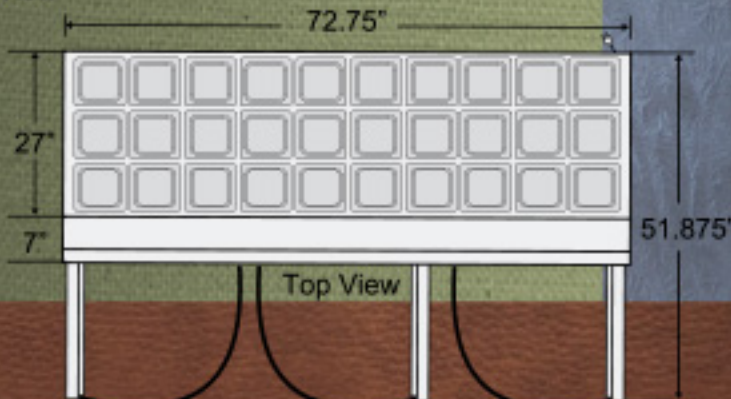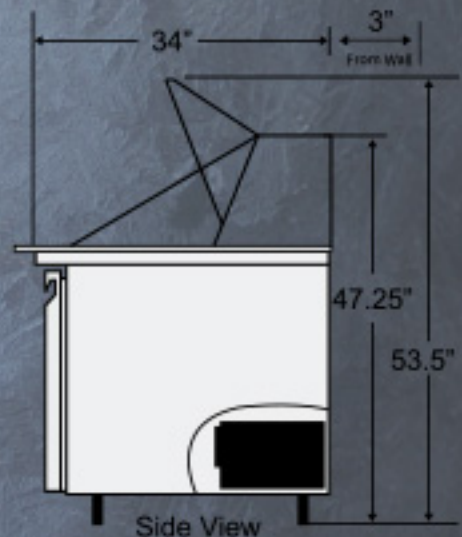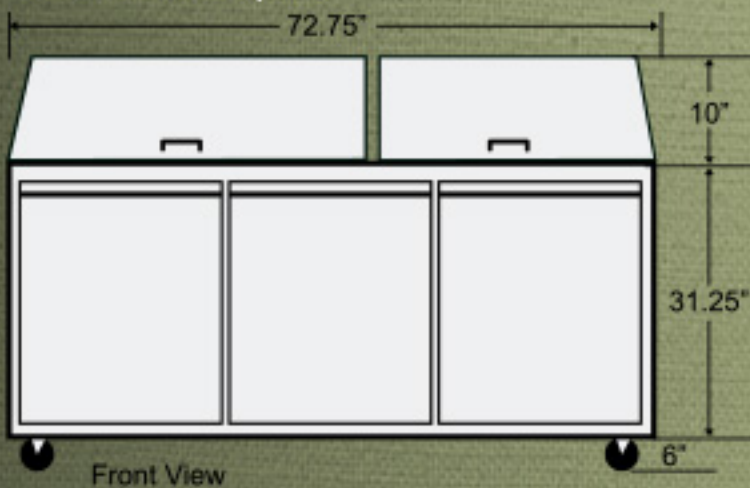

NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

1 Door Pizza Unit



BPT-44

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

1 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

*Does not include pans.

Technical Data

Plan View




Dimensions

Exterior Dimensions (Inches)	44" x 33.125" x 44.5"
Interior Dimensions Top (Inches)	42" x 13" x 8"
Interior Dimensions Bottom (Inches)	26" x 26" x 24"
Packaging Dimensions (Inches)	46.7" x 35.2" x 45.4"
Capacity (cu. ft.)	19 cu. ft.
Gross Weight (lbs)	309 lbs

Construction

Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	1
# of Shelves	1
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

*Does not include pans

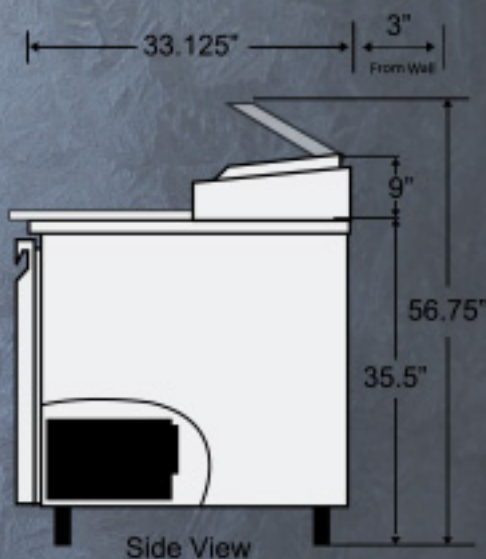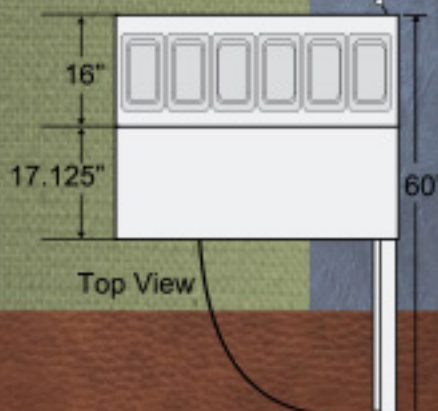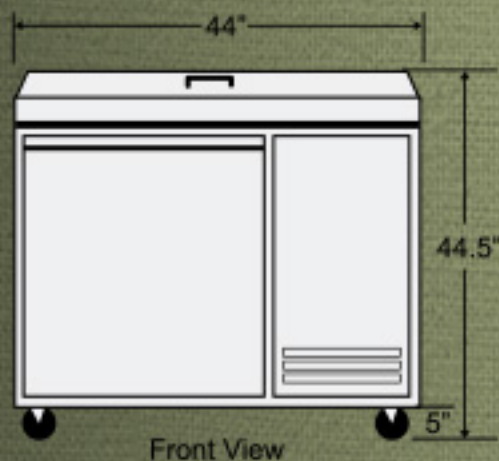

Cooling

Temperature Range	33° ~ 40° F
Refrigerant	R290
Refrigerant Amount (oz)	11.6
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Thermostat
Compressor H/P	1/3

Electrical

Voltage (v/Hz)	115/60
Power (W)	390
Power Consumption (kw/24hr)	1.8
Phase	1



NEMA 5-15



COMPLIES WITH ANSI/NSF 7 FOR FOOD SERVICE

2 Door Pizza Unit

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

2 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

4 Casters
They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

*Does not include pans.



BPT-67

Technical Data

Plan View



Dimensions

Exterior Dimensions (Inches)	67" x 33.125" x 44.5"
Interior Dimensions Top (Inches)	65" x 13" x 8"
Interior Dimensions Bottom (Inches)	49" x 26" x 24"
Packaging Dimensions (Inches)	69.7" x 35.2" x 45.4"
Capacity (cu. ft.)	20 cu. ft.
Gross Weight (lbs)	369 lbs

Construction

Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	2
# of Shelves	2
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs

*Does not include pans

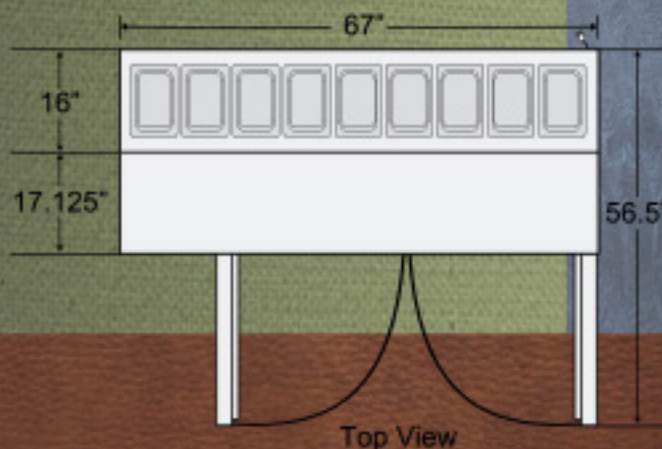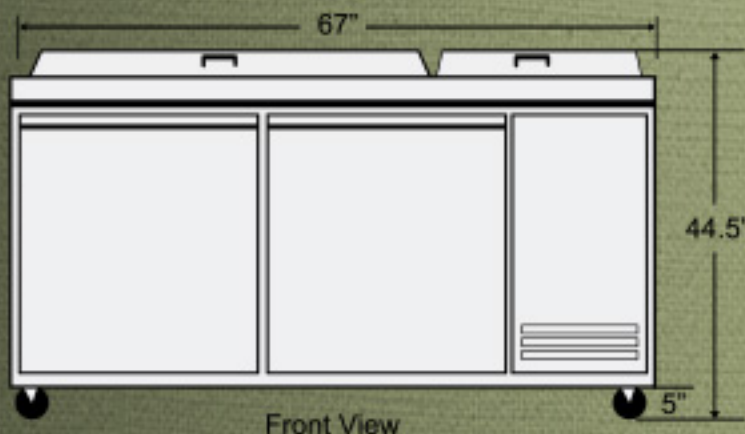


Cooling

Temperature Range	33° ~ 40° F
Refrigerant	R290
Refrigerant Amount (oz)	11.6
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Thermostat
Compressor H/P	2/3

Electrical

Voltage (v/Hz)	115/60
Power (W)	630
Power Consumption (kw/24hr)	2.5
Phase	1

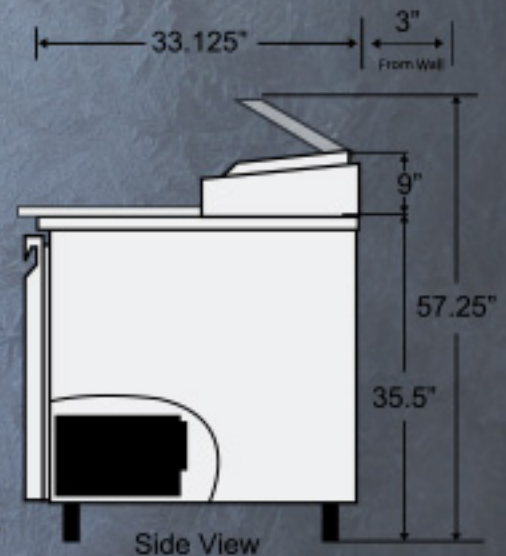

NEMA 5-15



COMPLIES WITH ANSI/NSF 7 FOR FOOD SERVICE

3 Door Pizza Unit

Features

Stainless Steel Interior and Exterior
High quality 430 stainless steel exterior and interior provide both durability and beauty to the unit.

Recessed Handle
Recessed along the entire door handle which provides strength and durability to the door to prevent damage/breakage during excessive opening.

2 Adjustable Interior Shelf
The interior shelf sits on adjustable mounting brackets to allow for height adjustments to accommodate different sized products.

6 Casters
They include 3 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Self Closing Door(s)
Self closing door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

*Does not include pans.



BPT-93

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	93" x 33.125" x 44.5"
Interior Dimensions Top (Inches)	90" x 13" x 8"
Interior Dimensions Bottom (Inches)	75" x 26" x 24"
Packaging Dimensions (Inches)	95.7" x 35.2" x 45.4"
Capacity (cu. ft.)	26 cu. ft.
Gross Weight (lbs)	512 lbs

Construction

Exterior Material	430 series stainless steel
Interior Material	430 series stainless steel
Insulation Material	Polyurethane
Insulation Thickness (mm)	45
# of Doors	3
# of Shelves	3
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs


*Does not include pans

Cooling

Temperature Range	33° ~ 40° F
Refrigerant	R290
Refrigerant Amount (oz)	10.6
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Thermostat
Compressor H/P	2/3

Electrical

Voltage (v/Hz)	115/60
Power (W)	650
Power Consumption (kw/24hr)	3.6
Phase	1

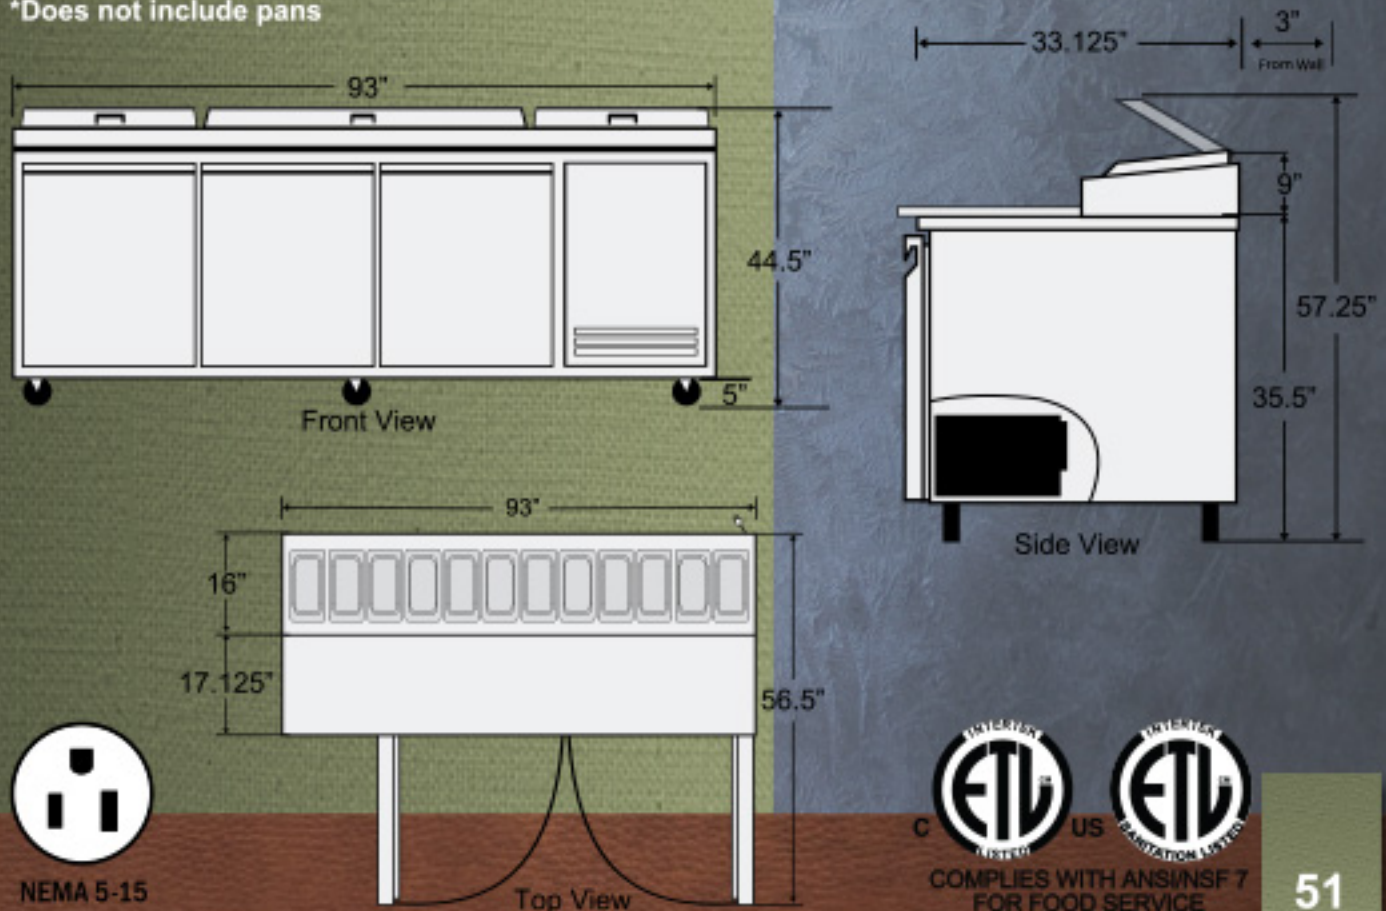

NEMA 5-15



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

1 Glass Door Reach-In Refrigerator



BGM-8

Features

Bottom Mounted Compressor

The bottom mounted compressor allows for easy access while loading, unloading, maintenance and cleaning. Also due to the temperature difference between the bottom and the top of the room this compressor location is superior to the top mounted style.

1 Anti-Fog Self Closing Door

Fully insulated glass door while providing clear visibility of products inside also helps keep energy costs down by not allowing as much cold air to escape the unit while opening.

4 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets; accommodating for different sized products with shelf by shelf height adjustments.

Digital Temperature Controls

The LCD display allows for easy visual read out and temperature control.

4 Casters

Including 2 pre-installed front locking casters for easy set up and moving during cleaning or maintenance.

LED Lighting

The light-emitting diode(LED) lighting provides high visibility for customer's viewing.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	21.2" x 20.7" x 69.8"
Interior Dimensions (Inches)	17.5" x 12.7" x 54.2"
Packaging Dimensions (Inches)	23" x 22.2" x 71.7"
Capacity (cu. ft.)	8.7 cu. ft.
Gross Weight	147 lbs

Construction



Exterior Material	Painted steel
Interior Material	Painted Aluminum
Door/Lid Material	Glass Door
Insulation Material	Cyclopentane
# of Doors	1
Self Closing Door	Yes
Lock Mounted	Yes
# of Shelves	4
Shelf Material	Plastic coated steel
Shelf Load Capacity	90 lbs

Cooling

Temperature Range	33° - 40° F
Refrigerant	R290
Maximum Ambient Temperature Rating	90° F
Defrosting	Automatic
Temperature Display	Yes
Temperature Controller	Digital
Cooling System	Ventilated
Compressor H/P	1/4

Electrical

Voltage (v/Hz)	115/60
Amps	4

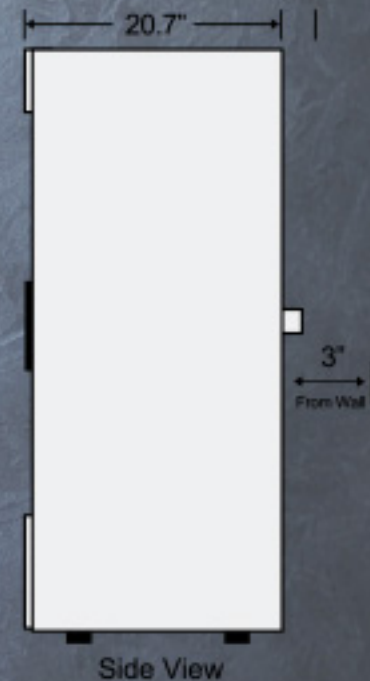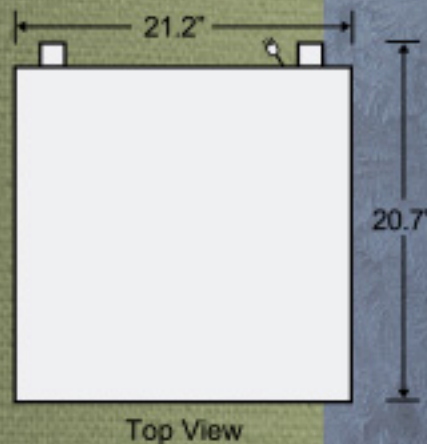

NEMA 5-15P



COMPLIES WITH ANS/NSF 7
FOR FOOD SERVICE

1 Glass Door Reach-In Refrigerator



BGM-15

Features

Bottom Mounted Compressor

The bottom mounted compressor allows for easy access while loading, unloading, maintenance and cleaning. Also due to the temperature difference between the bottom and the top of the room this compressor location is superior to the top mounted style.

1 Anti-Fog Self Closing Door

Fully insulated glass door while providing clear visibility of products inside also helps keep energy costs down by not allowing as much cold air to escape the unit while opening.

4 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets; accommodating for different sized products with shelf by shelf height adjustments.

Digital Temperature Controls

The LCD display allows for easy visual read out and temperature control.

4 Casters

Including 2 pre-installed front locking casters for easy set up and moving during cleaning or maintenance.

LED Lighting

The light-emitting diode(LED) lighting provides high visibility for customer's viewing.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	23.9" x 26.2" x 78.7"
Interior Dimensions (Inches)	20.2" x 19.7" x 61.5"
Packaging Dimensions (Inches)	24.2" x 28" x 82.1"
Capacity (cu. ft.)	15 cu. ft.
Gross Weight	194 lbs

Construction



Exterior Material	Painted steel
Interior Material	Painted Aluminum
Door/Lid Material	Glass Door
Insulation Material	Cyclopentane
# of Doors	1
Self Closing Door	Yes
Lock Mounted	Yes
# of Shelves	4
Shelf Material	Plastic coated steel
Shelf Load Capacity	90 lbs

Cooling

Temperature Range	33° - 40° F
Refrigerant	R290
Maximum Ambient Temperature Rating	90° F
Defrosting	Automatic
Temperature Display	Yes
Temperature Controller	Digital
Cooling System	Ventilated
Compressor H/P	1/4

Electrical

Voltage (v/Hz)	115/60
Amps	5

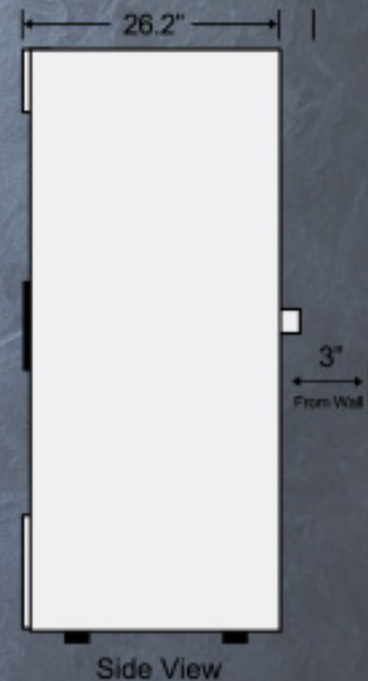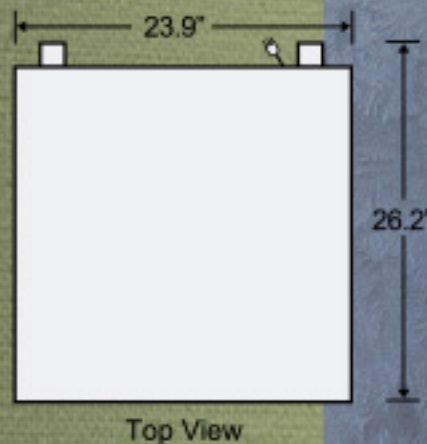

NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

1 Glass Door Reach-In Refrigerator



BGM-21

Features

Bottom Mounted Compressor

The bottom mounted compressor allows for easy access while loading, unloading, maintenance and cleaning. Also due to the temperature difference between the bottom and the top of the room this compressor location is superior to the top mounted style.

1 Anti-Fog Self Closing Door

Fully insulated glass door while providing clear visibility of products inside also helps keep energy costs down by not allowing as much cold air to escape the unit while opening.

4 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets; accommodating for different sized products with shelf by shelf height adjustments.

Digital Temperature Controls

The LCD display allows for easy visual read out and temperature control.

4 Casters

Including 2 pre-installed front locking casters for easy set up and moving during cleaning or maintenance.

LED Lighting

The light-emitting diode(LED) lighting provides high visibility for customer's viewing.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	27.6" x 31.1" x 81"
Interior Dimensions (Inches)	23.7" x 24.2" x 62.8"
Packaging Dimensions (Inches)	29.3" x 32.5" x 83.5"
Capacity (cu. ft.)	21 cu. ft.
Gross Weight	246 lbs

Construction



Exterior Material	Painted steel
Interior Material	Painted Aluminum
Door/Lid Material	Glass Door
Insulation Material	Cyclopentane
# of Doors	1
Self Closing Door	Yes
Lock Mounted	Yes
# of Shelves	4
Shelf Material	Plastic coated steel
Shelf Load Capacity	90 lbs

Cooling

Temperature Range	33° - 40° F
Refrigerant	R290
Maximum Ambient Temperature Rating	90° F
Defrosting	Automatic
Temperature Display	Yes
Temperature Controller	Digital
Cooling System	Ventilated
Compressor H/P	1/4

Electrical

Voltage (v/Hz)	115/60
Amps	5.14

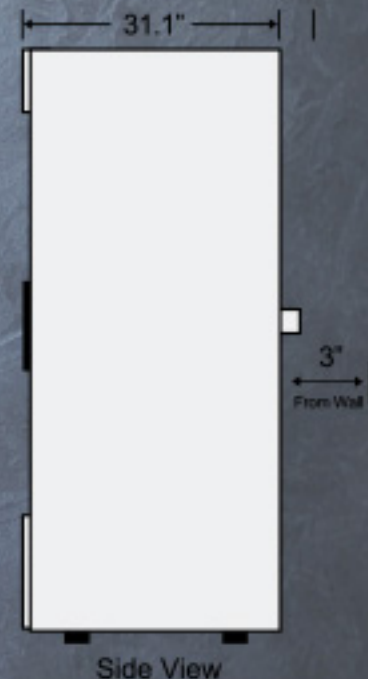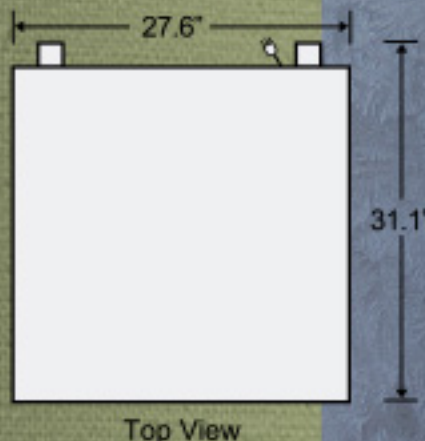

NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

2 Glass Door Reach-In Refrigerator



BGM-35

Features

Bottom Mounted Compressor

The bottom mounted compressor allows for easy access while loading, unloading, maintenance and cleaning. Also due to the temperature difference between the bottom and the top of the room this compressor location is superior to the top mounted style.

2 Anti-Fog Self Closing Doors

Fully insulated glass doors while providing clear visibility of products inside also helps keep energy costs down by not allowing as much cold air to escape the unit while opening.

8 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets; accommodating for different sized products with shelf by shelf height adjustments.

Digital Temperature Controls

The LCD display allows for easy visual read out and temperature control.

4 Casters

Including 2 pre-installed front locking casters for easy set up and moving during cleaning or maintenance.

LED Lighting

The light-emitting diode(LED) lighting provides high visibility for customer's viewing.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	44.5" x 28.3" x 79.3"
Interior Dimensions (Inches)	40.7" x 21.5" x 61.5"
Packaging Dimensions (Inches)	46.5" x 30.3" x 82.7"
Capacity (cu. ft.)	35 cu. ft.
Gross Weight	345 lbs

Construction


Exterior Material	Painted steel
Interior Material	Painted Aluminum
Door/Lid Material	Glass Door
Insulation Material	Cyclopentane
# of Doors	2
Self Closing Door	Yes
Lock Mounted	Yes
# of Shelves	8
Shelf Material	Plastic coated steel
Shelf Load Capacity	90 lbs

Cooling

Temperature Range	33° - 40° F
Refrigerant	R290
Maximum Ambient Temperature Rating	90° F
Defrosting	Automatic
Temperature Display	Yes
Temperature Controller	Digital
Cooling System	Ventilated
Compressor H/P	1/3

Electrical

Voltage (v/Hz)	115/60
Amps	9.5

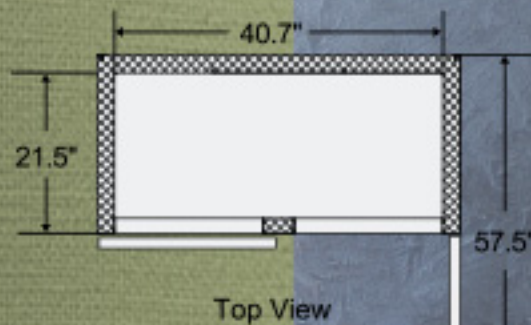

NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

2 Glass Door Reach-In Refrigerator



BGM-35-SD

Features

Bottom Mounted Compressor

The bottom mounted compressor allows for easy access while loading, unloading, maintenance and cleaning. Also due to the temperature difference between the bottom and the top of the room this compressor location is superior to the top mounted style.

2 Anti-Fog Self Closing Sliding Doors

Fully insulated glass doors while providing clear visibility of products inside also helps keep energy costs down by not allowing as much cold air to escape the unit while opening.

8 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets; accommodating for different sized products with shelf by shelf height adjustments.

Digital Temperature Controls

The LCD display allows for easy visual read out and temperature control.

4 Casters

Including 2 pre-installed front locking casters for easy set up and moving during cleaning or maintenance.

LED Lighting

The light-emitting diode(LED) lighting provides high visibility for customer's viewing.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	44.5" x 27.6" x 79.3"
Interior Dimensions (Inches)	40.7" x 19.8" x 61.5"
Packaging Dimensions (Inches)	46.5" x 29.5" x 82.7"
Capacity (cu. ft.)	35 cu. ft.
Gross Weight	339 lbs

Construction



Exterior Material	Painted steel
Interior Material	Painted Aluminum
Door/Lid Material	Glass Door
Insulation Material	Cyclopentane
# of Sliding Doors	2
Self Closing Door	Yes
Lock Mounted	No
# of Shelves	8
Shelf Material	Plastic coated steel
Shelf Load Capacity	90 lbs

Cooling

Temperature Range	33° - 40° F
Refrigerant	R290
Maximum Ambient Temperature Rating	90° F
Defrosting	Automatic
Temperature Display	Yes
Temperature Controller	Digital
Cooling System	Ventilated
Compressor H/P	1/3

Electrical

Voltage (v/Hz)	115/60
Amps	9.5
Phase	1

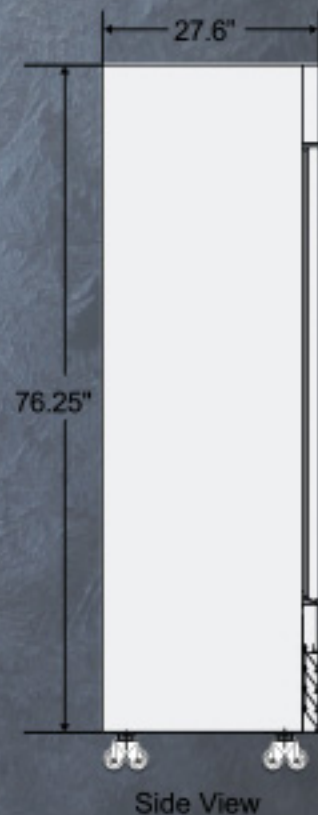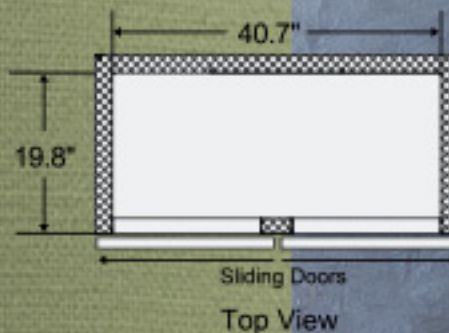

NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

2 Glass Door Reach-In Refrigerator



BGM-49

Features

Bottom Mounted Compressor

The bottom mounted compressor allows for easy access while loading, unloading, maintenance and cleaning. Also due to the temperature difference between the bottom and the top of the room this compressor location is superior to the top mounted style.

2 Anti-Fog Self Closing Doors

Fully insulated glass doors while providing clear visibility of products inside also helps keep energy costs down by not allowing as much cold air to escape the unit while opening.

8 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets; accommodating for different sized products with shelf by shelf height adjustments.

Digital Temperature Controls

The LCD display allows for easy visual read out and temperature control.

4 Casters

Including 2 pre-installed front locking casters for easy set up and moving during cleaning or maintenance.

LED Lighting

The light-emitting diode(LED) lighting provides high visibility for customer's viewing.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	52.4" x 32.3" x 79.3"
Interior Dimensions (Inches)	48.5" x 25.4" x 61.5"
Packaging Dimensions (Inches)	54.3" x 34.3" x 82.7"
Capacity (cu. ft.)	48 cu. ft.
Gross Weight	429 lbs

Construction


Exterior Material	Painted steel
Interior Material	Painted Aluminum
Door/Lid Material	Glass Door
Insulation Material	Cyclopentane
# of Doors	2
Self Closing Door	Yes
Lock Mounted	Yes
# of Shelves	4
Shelf Material	Plastic coated steel
Shelf Load Capacity	90 lbs

Cooling

Temperature Range	33° - 40° F
Refrigerant	R290
Maximum Ambient Temperature Rating	90° F
Defrosting	Automatic
Temperature Display	Yes
Temperature Controller	Digital
Cooling System	Ventilated
Compressor H/P	1/3

Electrical

Voltage (v/Hz)	115/60
Amps	9.5
Phase	1

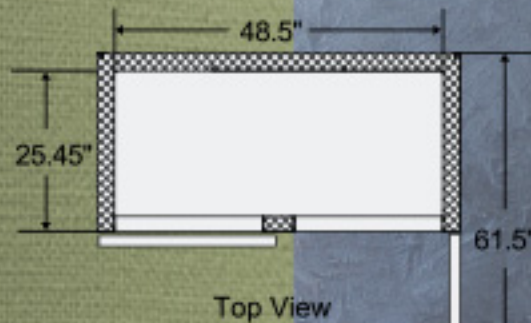

NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

2 Glass Door Reach-In Refrigerator



BGM-49-SD

Features

Bottom Mounted Compressor

The bottom mounted compressor allows for easy access while loading, unloading, maintenance and cleaning. Also due to the temperature difference between the bottom and the top of the room this compressor location is superior to the top mounted style.

2 Anti-Fog Self Closing Sliding Doors

Fully insulated glass doors while providing clear visibility of products inside also helps keep energy costs down by not allowing as much cold air to escape the unit while opening.

8 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets; accommodating for different sized products with shelf by shelf height adjustments.

Digital Temperature Controls

The LCD display allows for easy visual read out and temperature control.

4 Casters

Including 2 pre-installed front locking casters for easy set up and moving during cleaning or maintenance.

LED Lighting

The light-emitting diode(LED) lighting provides high visibility for customer's viewing.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	52.4" x 31.5" x 79.3"
Interior Dimensions (Inches)	48.5" x 23.7" x 61.5"
Packaging Dimensions (Inches)	54.3" x 33.5" x 82.7"
Capacity (cu. ft.)	48 cu. ft.
Gross Weight	425 lbs

Construction


Exterior Material	Painted steel
Interior Material	Painted Aluminum
Door/Lid Material	Glass Door
Insulation Material	Cyclopentane
# of Sliding Doors	2
Self Closing Door	Yes
Lock Mounted	No
# of Shelves	4
Shelf Material	Plastic coated steel
Shelf Load Capacity	90 lbs

Cooling


Temperature Range	33° - 40° F
Refrigerant	R290
Maximum Ambient Temperature Rating	90° F
Defrosting	Automatic
Temperature Display	Yes
Temperature Controller	Digital
Cooling System	Ventilated
Compressor H/P	1/3

Electrical


Voltage (v/Hz)	115/60
Amps	9.5
Phase	1

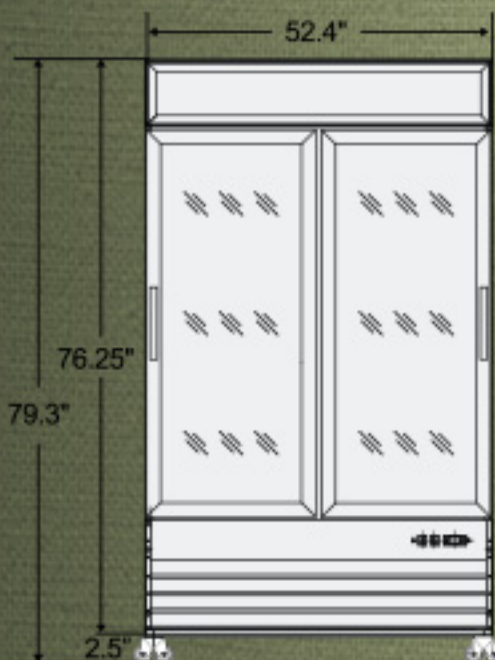

Front View

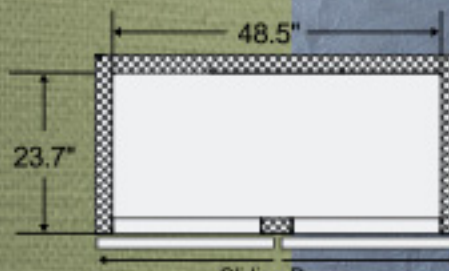

Sliding Doors
Top View

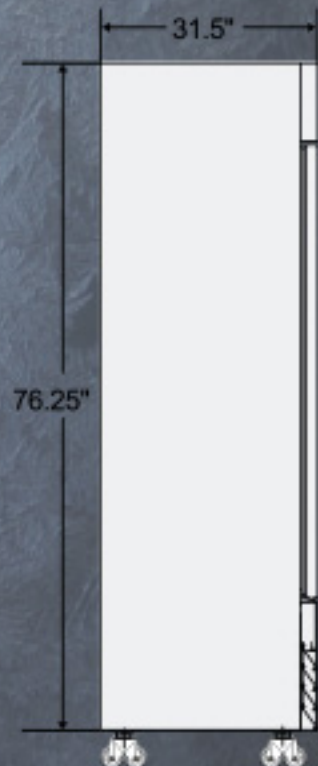

Side View



NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

3 Glass Door Reach-In Refrigerator



BGM-53

Features

Bottom Mounted Compressor

The bottom mounted compressor allows for easy access while loading, unloading, maintenance and cleaning. Also due to the temperature difference between the bottom and the top of the room this compressor location is superior to the top mounted style.

3 Anti-Fog Self Closing Doors

Fully insulated glass doors while providing clear visibility of products inside also helps keep energy costs down by not allowing as much cold air to escape the unit while opening.

15 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets; accommodating for different sized products with shelf by shelf height adjustments.

Digital Temperature Controls

The LCD display allows for easy visual read out and temperature control.

4 Casters

Including 2 pre-installed front locking casters for easy set up and moving during cleaning or maintenance.

LED Lighting

The light-emitting diode(LED) lighting provides high visibility for customer's viewing.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	67.3" x 28.3" x 81"
Interior Dimensions (Inches)	63.4" x 21.5" x 61.6"
Packaging Dimensions (Inches)	69.3" x 30.3" x 84.3"
Capacity (cu. ft.)	53 cu. ft.
Gross Weight	488 lbs

Construction


Exterior Material	Painted steel
Interior Material	Painted Aluminum
Door/Lid Material	Glass Door
Insulation Material	Cyclopentane
# of Doors	3
Self Closing Door	Yes
Lock Mounted	Yes
# of Shelves	15
Shelf Material	Plastic coated steel
Shelf Load Capacity	90 lbs

Cooling

Temperature Range	33° - 40° F
Refrigerant	R290
Maximum Ambient Temperature Rating	90° F
Defrosting	Automatic
Temperature Display	Yes
Temperature Controller	Digital
Cooling System	Ventilated
Compressor H/P	1/2

Electrical

Voltage (v/Hz)	115/60
Amps	9.5
Phase	1

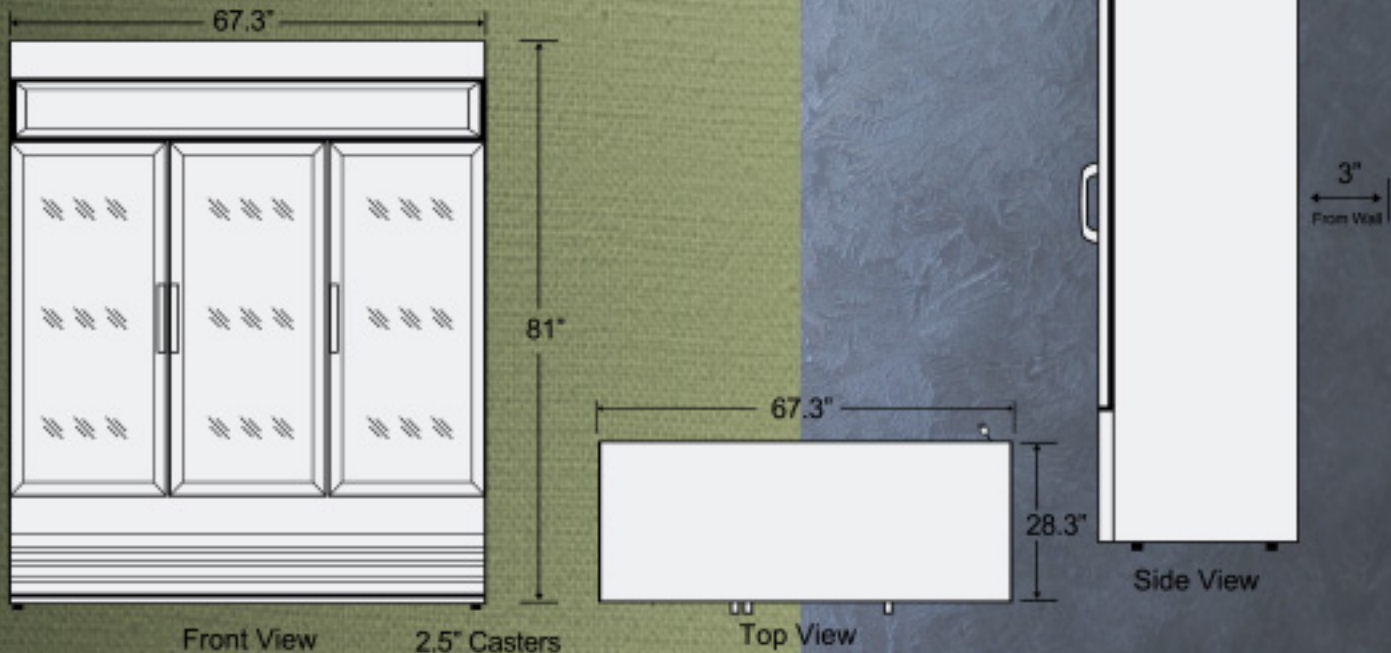

NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

Countertop Display Refrigerator



BRM-.74

Features

1 Anti-Fog Self Closing Door

Fully insulated glass doors while providing clear visibility of products inside also helps keep energy costs down by not allowing as much cold air to escape the unit while opening.

Self Closing Door Locks

Door comes with a mounted lock with keys.

2 Adjustable Interior Shelves

The interior shelves sit in mounting slots. Allowing accommodation for different sized products with shelf by shelf height adjustments.

4 Feet

Interior Bulb Lighting

Mechanical Temperature Controls

2 Year Parts and Labor Warranty

5 Year Compressor Warranty

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	12" x 16.5" x 24"
Interior Dimensions (Inches)	9.84" x 10.4" x 14.3"
Packaging Dimensions (Inches)	15" x 17.6" x 26.1"
Net Volume (cu. ft.)	.74 cu. ft.
Net Weight	35.2 lbs
Gross Weight	39.6 lbs

Construction


Exterior Material	Painted steel
Liner Material	ABS
Door/Lid Material	Glass Door
Insulation Material	Cyclopentane
# of Doors	1
Self Closing Door	Yes
Lock Mounted	Yes
# of Shelves	2
Feet	4
Lighting	Bulb
Shelf Material	Plastic coated steel
Shelf Load Capacity	13.2 lbs

Cooling


Temperature Range	35° - 45° F
Refrigerant	R600a
Maximum Ambient Temperature Rating	
Defrosting	Automatic
Temperature Display	No
Temperature Controller	Mechanical
Cooling System	Cold Wall
Compressor H/P	1/10
Climate Rating (F)	90

Electrical


Voltage (v/Hz)	115/60
Connection Rating Amps	1.6
Plug Type	5-15p

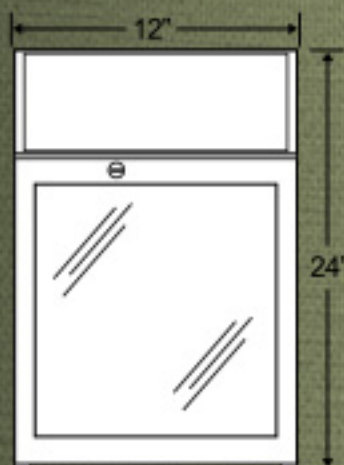

Front View

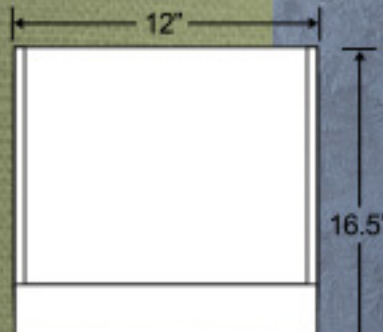

Top View

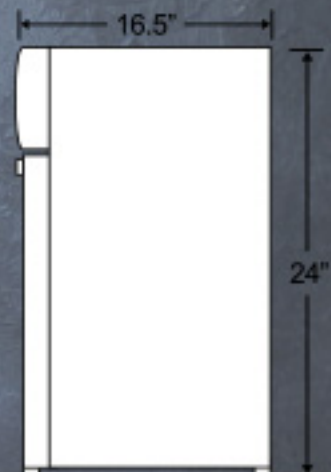

Side View



NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

Countertop Display Refrigerator



BRM-1.41

Features

1 Anti-Fog Self Closing Door

Fully insulated glass doors while providing clear visibility of products inside also helps keep energy costs down by not allowing as much cold air to escape the unit while opening.

Self Closing Door Locks

Door comes with a mounted lock with keys.

3 Adjustable Interior Shelves

The interior shelves sit in mounting slots. Allowing accommodation for different sized products with shelf by shelf height adjustments.

4 Feet

Interior Bulb Lighting

Mechanical Temperature Controls

2 Year Parts and Labor Warranty

5 Year Compressor Warranty

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	16" x 16.5" x 30"
Interior Dimensions (Inches)	12" x 10" x 17.7"
Packaging Dimensions (Inches)	18.3" x 18.4" x 30.8"
Net Volume (cu. ft.)	1.41 cu. ft.
Net Weight	44 lbs
Gross Weight	48.4 lbs

Construction


Exterior Material	Painted steel
Liner Material	ABS
Door/Lid Material	Glass Door
Insulation Material	Cyclopentane
# of Doors	1
Self Closing Door	Yes
Lock Mounted	Yes
# of Shelves	3
Feet	4
Lighting	Bulb
Shelf Material	Plastic coated steel
Shelf Load Capacity	13.2 lbs

Cooling


Temperature Range	35° - 45° F
Refrigerant	R600a
Maximum Ambient Temperature Rating	
Defrosting	Automatic
Temperature Display	No
Temperature Controller	Mechanical
Cooling System	Cold Wall
Compressor H/P	1/10
Climate Rating (F)	90

Electrical


Voltage (v/Hz)	115/60
Connection Rating Amps	1.6
Plug Type	5-15p

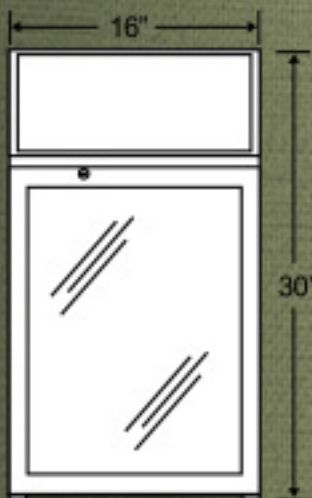

Front View

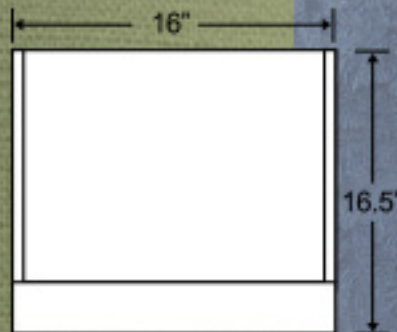

Top View

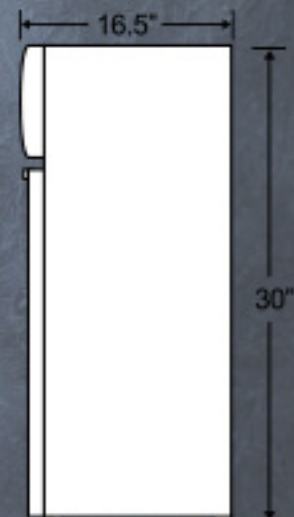

Side View



NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

Countertop Display Refrigerator



BRM-1.84

Features

1 Anti-Fog Self Closing Door

Fully insulated glass doors while providing clear visibility of products inside also helps keep energy costs down by not allowing as much cold air to escape the unit while opening.

Self Closing Door Locks

Door comes with a mounted lock with keys.

3 Adjustable Interior Shelves

The interior shelves sit in mounting slots. Allowing accommodation for different sized products with shelf by shelf height adjustments.

4 Feet

Interior Bulb Lighting

Mechanical Temperature Controls

2 Year Parts and Labor Warranty

5 Year Compressor Warranty

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	16.5" x 18" x 31.25"
Interior Dimensions (Inches)	13" x 10.6" x 19.7"
Packaging Dimensions (Inches)	19.8" x 20.8" x 33.1"
Net Volume (cu. ft.)	1.84 cu. ft.
Net Weight	50.6 lbs
Gross Weight	55 lbs

Construction




Exterior Material	Painted steel
Liner Material	ABS
Door/Lid Material	Glass Door
Insulation Material	Cyclopentane
# of Doors	1
Self Closing Door	Yes
Lock Mounted	Yes
# of Shelves	3
Feet	4
Lighting	Bulb
Shelf Material	Plastic coated steel
Shelf Load Capacity	13.2 lbs

Cooling

Temperature Range	35° - 45° F
Refrigerant	R600a
Maximum Ambient Temperature Rating	
Defrosting	Automatic
Temperature Display	No
Temperature Controller	Mechanical
Cooling System	Cold Wall
Compressor H/P	1/10
Climate Rating (F)	90

Electrical

Voltage (v/Hz)	115/60
Connection Rating Amps	1.6
Plug Type	5-15p

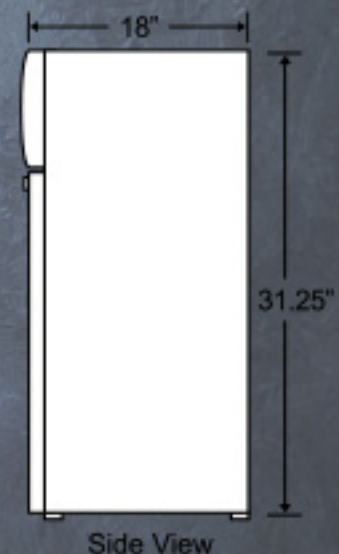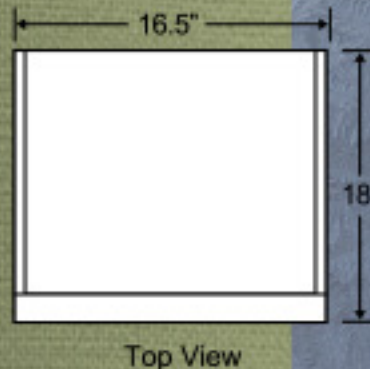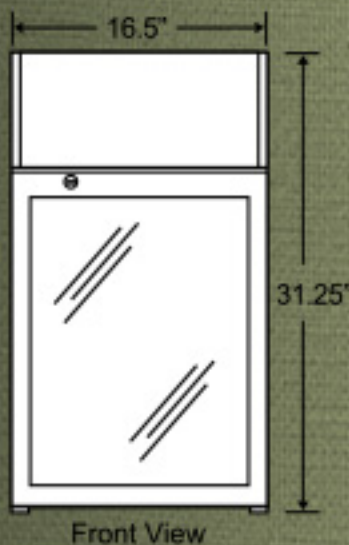

NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

Countertop Display Refrigerator



BRM-2.83

Features

1 Anti-Fog Self Closing Door

Fully insulated glass doors while providing clear visibility of products inside also helps keep energy costs down by not allowing as much cold air to escape the unit while opening.

Self Closing Door Locks

Door comes with a mounted lock with keys.

3 Adjustable Interior Shelves

The interior shelves sit in mounting slots. Allowing accommodation for different sized products with shelf by shelf height adjustments.

4 Feet

Interior Bulb Lighting

Mechanical Temperature Controls

2 Year Parts and Labor Warranty

5 Year Compressor Warranty

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	18.25" x 18.5" x 36.75"
Interior Dimensions (Inches)	13.8" x 11" x 24.8"
Packaging Dimensions (Inches)	21.3" x 21.2" x 38.7"
Net Volume (cu. ft.)	2.83 cu. ft.
Net Weight	63.8 lbs
Gross Weight	70.4 lbs

Construction




Exterior Material	Painted steel
Liner Material	ABS
Door/Lid Material	Glass Door
Insulation Material	Cyclopentane
# of Doors	1
Self Closing Door	Yes
Lock Mounted	Yes
# of Shelves	3
Feet	4
Lighting	Bulb
Shelf Material	Plastic coated steel
Shelf Load Capacity	13.2 lbs

Cooling

Temperature Range	35° - 50° F
Refrigerant	R600a
Maximum Ambient Temperature Rating	
Defrosting	Automatic
Temperature Display	No
Temperature Controller	Mechanical
Cooling System	Cold Wall
Compressor H/P	1/10
Climate Rating (F)	90

Electrical

Voltage (v/Hz)	115/60
Connection Rating Amps	1.8
Plug Type	5-15p

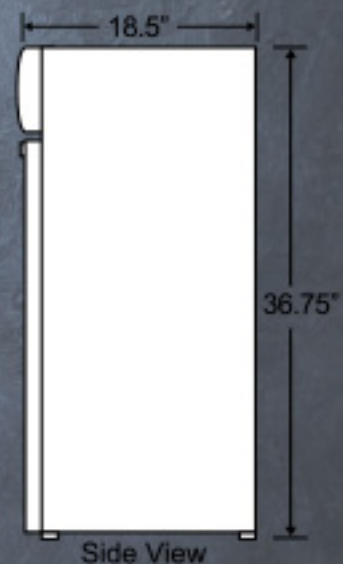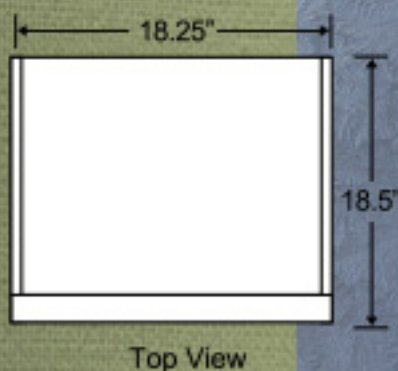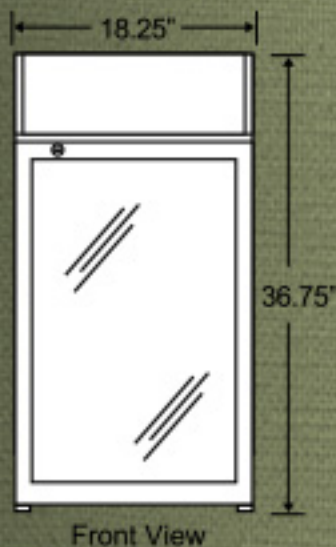

NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

Countertop Display Freezer

Features

1 Anti-Fog Self Closing Door

Fully insulated glass doors while providing clear visibility of products inside also helps keep energy costs down by not allowing as much cold air to escape the unit while opening.

3 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets; accommodating for different sized products with shelf by shelf height adjustments.

4 Feet

Top + Interior LED Lighting

The light-emitting diode(LED) lighting provides high visibility for customer's viewing.

Digital Temperature Controls

2 Year Parts and Labor Warranty

5 Year Compressor Warranty



BFM-4

Technical Data


Plan View

Dimensions


Exterior Dimensions (Inches)	23.5" x 21.5" x 40"
Interior Dimensions (Inches)	17.8" x 14.2" x 26.8"
Packaging Dimensions (Inches)	26.8" x 23.6" x 42.7"
Net Volume (cu. ft.)	4 cu. ft.
Net Weight	110 lbs
Gross Weight	118.8 lbs

Construction


Exterior Material	Painted steel
Liner Material	Painted Aluminum
Door/Lid Material	Glass Door
Insulation Material	Cyclopentane
# of Doors	1
Self Closing Door	Yes
Lock Mounted	No
# of Shelves	3
Feet	4
Top + Interior Lighting	LED
Shelf Material	Plastic coated steel
Shelf Load Capacity	13.2 lbs

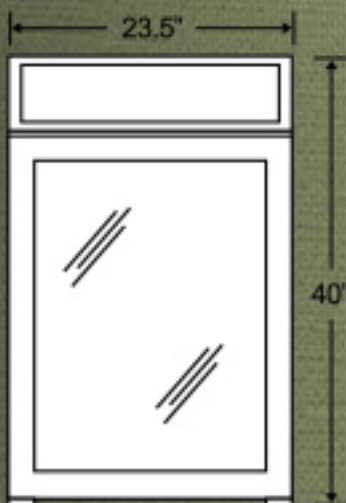

Front View

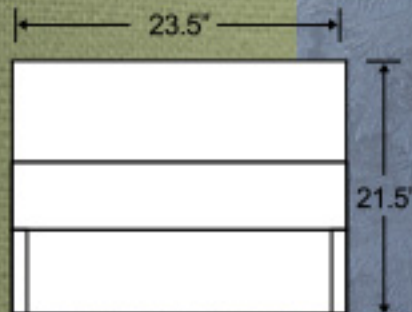

Top View

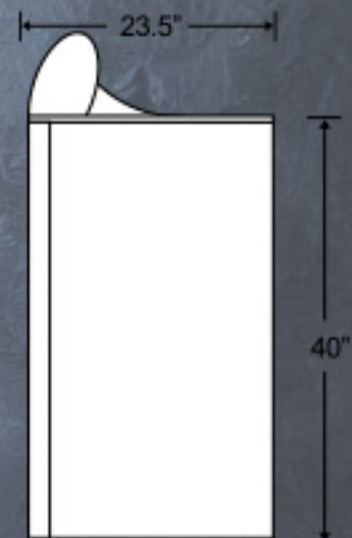

Side View

Cooling

Temperature Range	-13° - 5° F
Refrigerant	R290a
Maximum Ambient Temperature Rating	
Defrosting	Manual
Temperature Display	Yes
Temperature Controller	Digital
Cooling System	Cold Wall
Compressor H/P	1/4
Climate Rating (F)	90

Electrical

Voltage (v/Hz)	115/60
Connection Rating Amps	1.8
Plug Type	5-15p



NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

Bison X 1 Door Stainless Reach-In Refrigerator



XRR-21

Features

Stainless Steel Exterior

High quality 430 stainless steel exterior provide both durability and beauty to the unit. Also includes incandescent interior lighting.

Bottom Mounted Compressor

Allows for easier access while loading and unloading. This compressor location is ideal rather than top mounted style due to the temperature difference between the bottom and top of a room. Also allows easier access for maintenance and cleaning.

Self Closing Locking Door(s)

Self closing locking door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The locking door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Digital Temperature Controls

The LCD display allows for temperature control and easy visual read out.

3 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets to allow for height adjustments shelf by shelf to accommodate different sized products.

4 Casters

They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	29" x 32.2" x 82.4"
Capacity (cu. ft.)	21 cu. ft.
Ship Weight (lbs)	322 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	Plastic
Insulation Material	Polyurethane
Insulation Thickness (mm)	60
# of Doors	1
# of Shelves	3
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs
Plug Type	NEMA 5-15P
cETLus	
NSF	

Cooling


Temperature Range	33° ~ 40° F
Refrigerant	R-290
Refrigerant Amount (oz)	9.2
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Digital
Compressor H/P	1/4

Electrical


Voltage (v/Hz)	115/60
Power (W)	365
Power Consumption (kw/24hr)	2
Phase	1

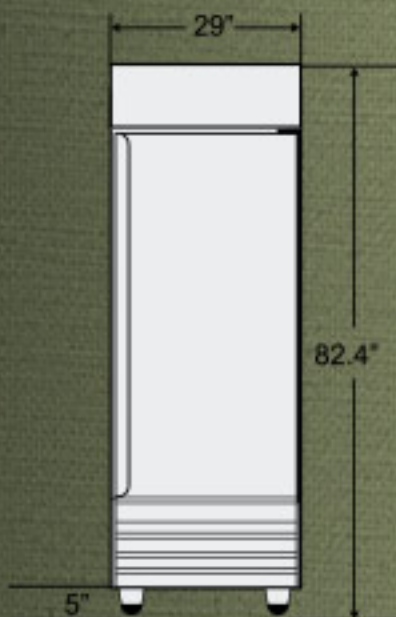

Front View

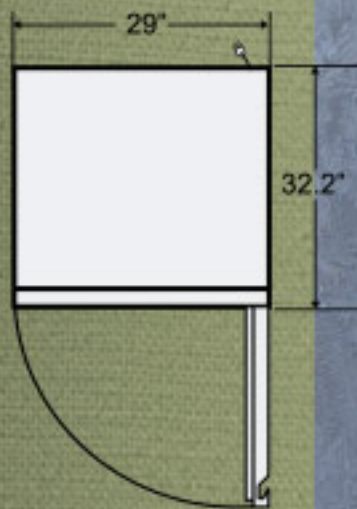

Top View

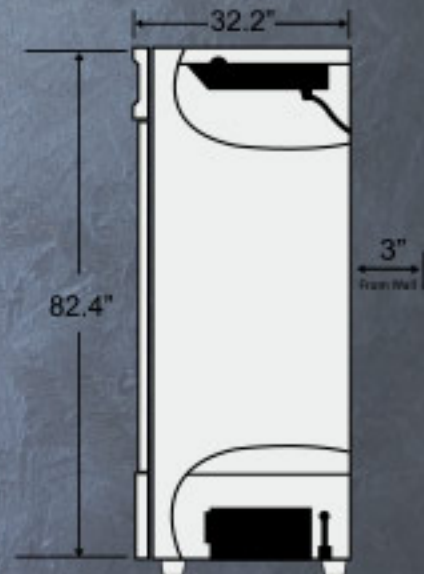

Side View



NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

Bison X 1 Door Stainless Reach-In Freezer



XRF-21

Features

Stainless Steel Exterior

High quality 430 stainless steel exterior provide both durability and beauty to the unit. Also includes incandescent interior lighting.

Bottom Mounted Compressor

Allows for easier access while loading and unloading. This compressor location is ideal rather than top mounted style due to the temperature difference between the bottom and top of a room. Also allows easier access for maintenance and cleaning.

Self Closing Locking Door(s)

Self closing locking door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The locking door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Digital Temperature Controls

The LCD display allows for temperature control and easy visual read out.

3 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets to allow for height adjustments shelf by shelf to accommodate different sized products.

4 Casters

They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	29" x 32.2" x 82.4"
Capacity (cu. ft.)	21 cu. ft.
Ship Weight (lbs)	322 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	Plastic
Insulation Material	Polyurethane
Insulation Thickness (mm)	60
# of Doors	1
# of Shelves	3
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs
Plug Type	NEMA 5-15P
cETLus	
NSF	

Cooling


Temperature Range	-8° ~ -1° F
Refrigerant	R-404A
Refrigerant Amount (oz)	13.4
Maximum Ambient Temperature Rating	90° F
Defrost Method	Electric Defrost
Defrost Power (W)	630
Cooling Method	Ventilated
Temperature Controller	Digital
Compressor H/P	1/2

Electrical


Voltage (v/Hz)	115/60
Power (W)	650
Power Consumption (kw/24hr)	6.2
Phase	1

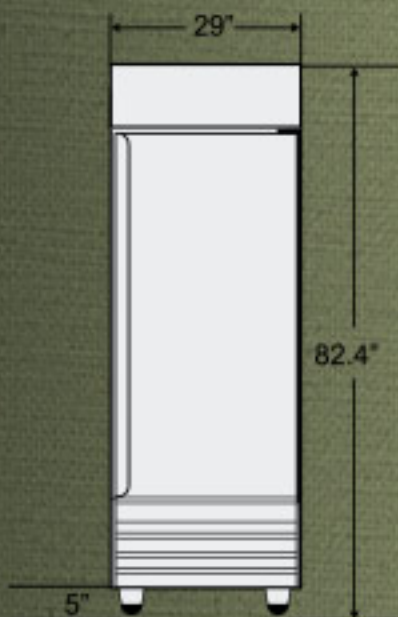

Front View

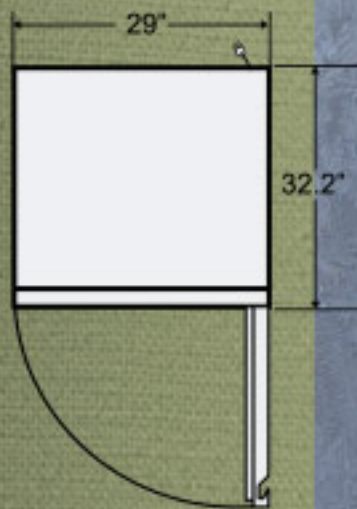

Top View

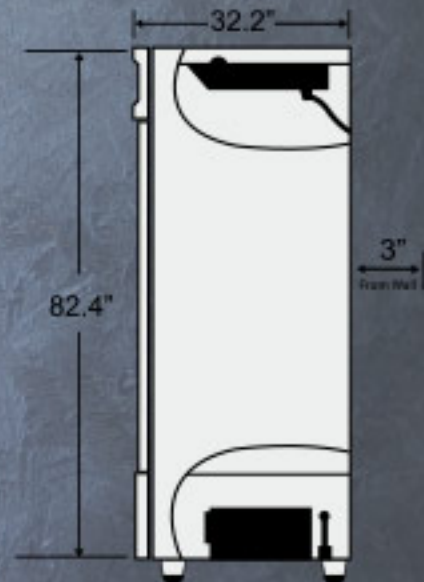

Side View



NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

Bison X 2 Door Stainless Reach-In Refrigerator



XRR-46

Features

Stainless Steel Exterior

High quality 430 stainless steel exterior provide both durability and beauty to the unit. Also includes incandescent interior lighting.

Bottom Mounted Compressor

Allows for easier access while loading and unloading. This compressor location is ideal rather than top mounted style due to the temperature difference between the bottom and top of a room. Also allows easier access for maintenance and cleaning.

Self Closing Locking Door(s)

Self closing locking door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The locking door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Digital Temperature Controls

The LCD display allows for temperature control and easy visual read out.

6 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets to allow for height adjustments shelf by shelf to accommodate different sized products.

4 Casters

They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	54" x 32.2" x 82.4"
Capacity (cu. ft.)	46 cu. ft.
Ship Weight (lbs)	531 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	Plastic
Insulation Material	Polyurethane
Insulation Thickness (mm)	60
# of Doors	2
# of Shelves	6
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs
Plug Type	NEMA 5-15P
cETLus	
NSF	

Cooling

Temperature Range	33° ~ 40° F
Refrigerant	R-290
Refrigerant Amount (oz)	13.4
Maximum Ambient Temperature Rating	90° F
Defrost Method	Air Defrost
Defrost Power (W)	0
Cooling Method	Ventilated
Temperature Controller	Digital
Compressor H/P	1/3

Electrical

Voltage (v/Hz)	115/60
Power (W)	590
Power Consumption (kw/24hr)	2.3
Phase	1

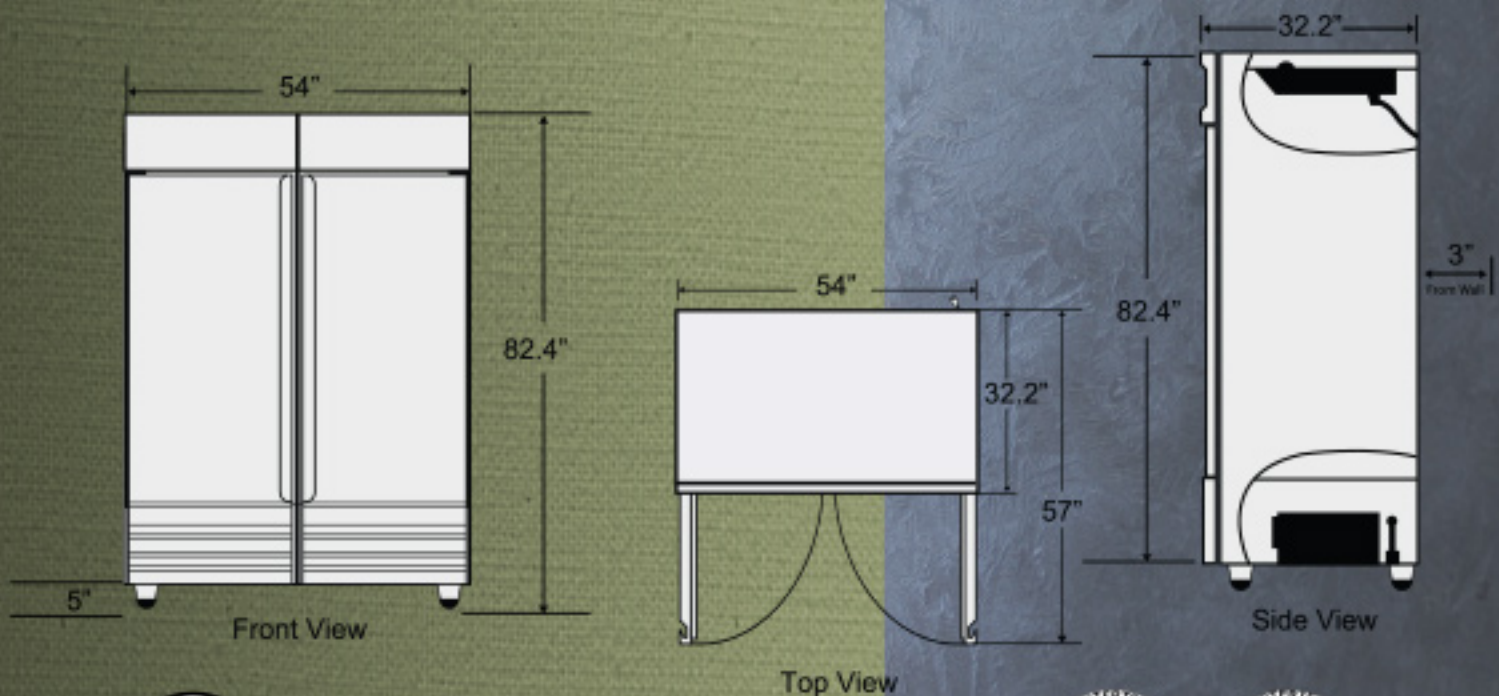

NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

Bison X 2 Door Stainless Reach-In Freezer



XRF-46

Features

Stainless Steel Exterior

High quality 430 stainless steel exterior provide both durability and beauty to the unit. Also includes incandescent interior lighting.

Bottom Mounted Compressor

Allows for easier access while loading and unloading. This compressor location is ideal rather than top mounted style due to the temperature difference between the bottom and top of a room. Also allows easier access for maintenance and cleaning.

Self Closing Locking Door(s)

Self closing locking door keeps energy costs down by not allowing as much cold air to escape the unit while opening. The locking door also has an auto stop feature that keeps door open when at 90 degrees to make for easier loading and unloading.

Digital Temperature Controls

The LCD display allows for temperature control and easy visual read out.

6 Adjustable Interior Shelves

The interior shelves sit on adjustable mounting brackets to allow for height adjustments shelf by shelf to accommodate different sized products.

4 Casters

They include 2 front locking casters and come pre-installed for easy set up. Also allows for easy moving during cleaning or maintenance.

Technical Data

Plan View

Dimensions

Exterior Dimensions (Inches)	54" x 32.2" x 82.4"
Capacity (cu. ft.)	46 cu. ft.
Ship Weight (lbs)	531 lbs

Construction


Exterior Material	430 series stainless steel
Interior Material	Plastic
Insulation Material	Polyurethane
Insulation Thickness (mm)	60
# of Doors	2
# of Shelves	6
Shelf Material	Plastic coated steel
Shelf Load Capacity (lbs/pc)	155 lbs
Plug Type	NEMA 5-15P
cETLus	
NSF	

Cooling

Temperature Range	-8° ~ -1° F
Refrigerant	R-404A
Refrigerant Amount (oz)	19.4
Maximum Ambient Temperature Rating	90° F
Defrost Method	Electric Defrost
Defrost Power (W)	800
Cooling Method	Ventilated
Temperature Controller	Digital
Compressor H/P	3/4

Electrical

Voltage (v/Hz)	115/60
Power (W)	590
Power Consumption (kw/24hr)	10
Phase	1

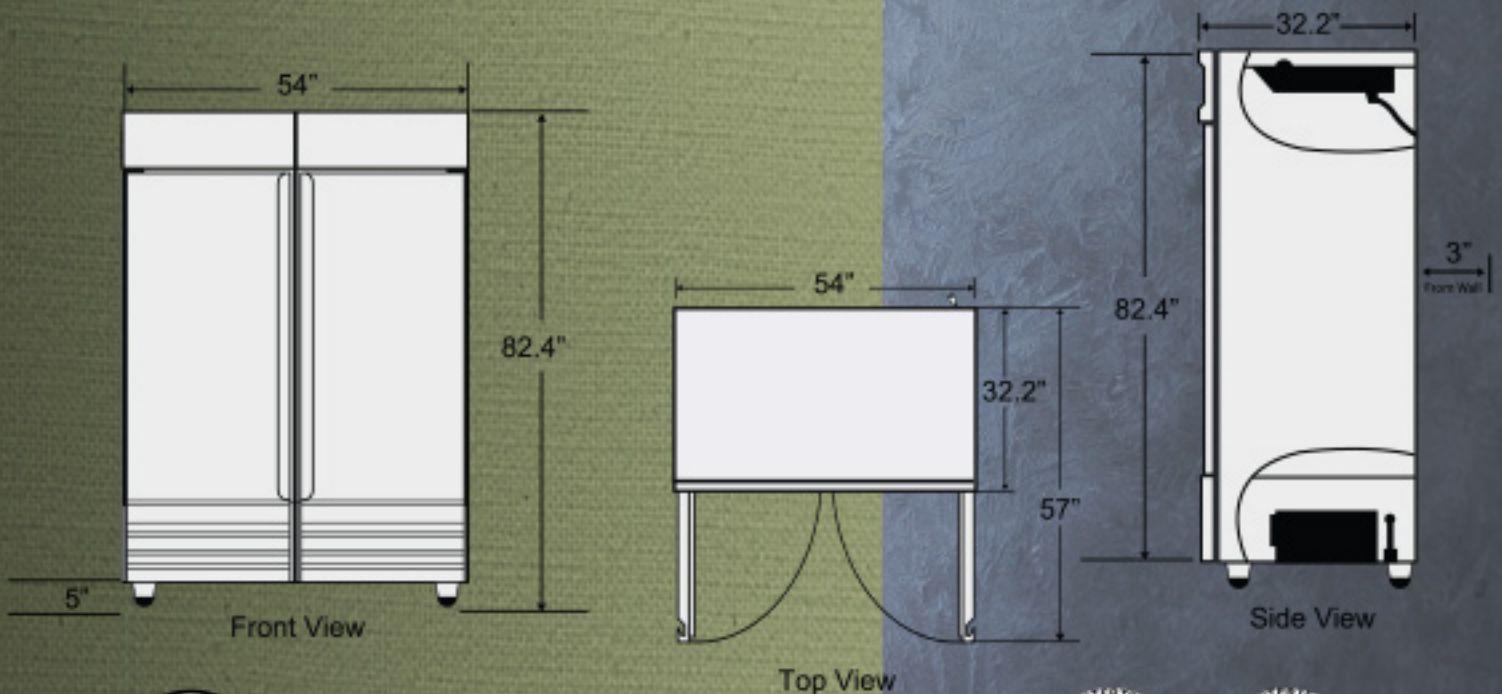

NEMA 5-15P



COMPLIES WITH ANSI/NSF 7
FOR FOOD SERVICE

Corporate Office
6 Prospect Street
Kingston, MA 02364

New York Warehouse
69 Bailey Street
Coxsackie, NY 12051

Florida Warehouse
3030 Winter Lake Rd
Lakeland, FL 33803

P. 855-525-5505 F. 863-816-5883

www.bisonrefrigeration.com