



# HIGH TEMPERATURE SINGLE RACK-SPLIT DOOR POT & PAN DISHWASHER

## 180-TC

High Temperature  
Single Rack Dishwasher



### FEATURES

- 60 racks / 240 covers per hour.
- Economical to operate. Uses only .82 gallons of water per cycle.
- Split door design provides a sheet pan door clearance of 27 inches, reduces overall (open-door) height of machine to 93-1/2". A beneficial feature for kitchens with low ceilings.
- Automatic soil purging system. Filters wash water and traps plate debris into an external tray. Tray can be easily removed for dumping contents.
- All stainless steel construction offers durable performance and years of trouble free operation.
- Built-in chemical resistant industrial 7kW heater is proven to be more durable than commercial style heaters.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Auto start/stop makes operation safe and easy.
- Field convertible for a wide range of applications.
- Safety Temp feature assures 180°F sanitizing rinse every cycle.
- Single point electrical connection.
- Automatic tank fill.
- Interchangeable upper and lower arms.


### CMA MODEL: 180-TC




Top mounted control box is water tight and includes a rack counter, extended wash/delimer switch and easy to read temperature gauges.



External scrap tray maintains clean wash water and prevents debris from clogging the drain.



Unique pull-pin design allows wash arms to be easily removed for cleaning.



Industrial wash tank and optional booster heaters are designed for years of trouble free service.

### AVAILABLE OPTIONS

- Exhaust Fan Time Control
- Built-in 12kW booster heater
- CMA-180 Conversion Kit Corner to Straight
- Alternative electrical available for export
- Stainless steel dishtables
- Dual power supply connections
- 3 doors open
- Slant Shelf
- Stainless Steel Scrap Trap Upgrade

**CMA  
MIZER**  
Registered Trademark






## CMA-180TC

High Temperature  
Pot and Pan Single Rack  
Split Door Dishwasher

### WARNINGS:

- Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.
- CMA recommends utilizing a water softening system to maintain water hardness measurements of 3.5 gpg (grains per gallon) or less. This will assure maximum results and optimum operation of the dishmachine.

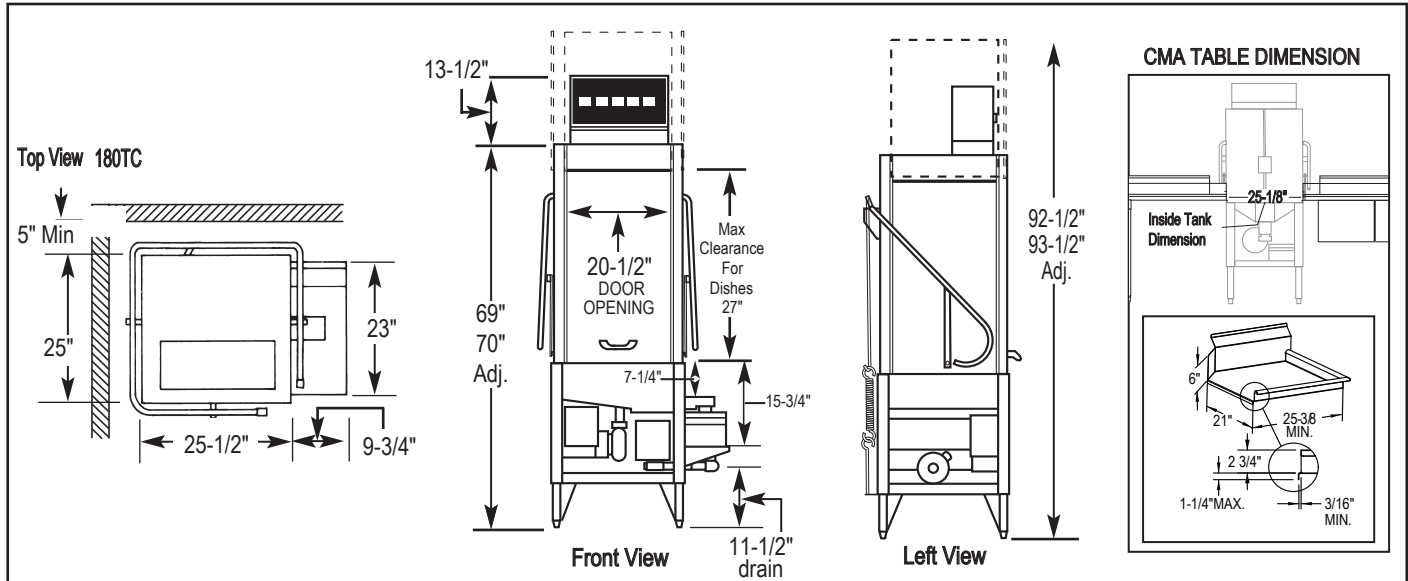

### Specifications:

MODEL CMA-180TC	USA	METRIC		USA	METRIC
<b>WATER CONSUMPTION</b>			<b>WASH PUMP MOTOR HP</b>	1	1
PER RACK	.82 GAL	(3.1 L)	<b>FRAME DIMENSIONS</b>		
PER HOUR	49.2GAL	(186 L)	DEPTH	25"	(63.5cm)
<b>OPERATING CYCLE</b>			WIDTH (OUTSIDE DIMENSION)	25"-1/2"	(65cm)
WASH TIME - SEC.	42	42	HEIGHT	69"-70"	(175-178cm)
RINSE TIME - SEC.	12	12	STANDARD TABLE HEIGHT	34"	(86.3cm)
DWELL TIME - SEC.	4	4	MAX CLEARANCE FOR DISHES	27"	(68.6cm)
TOTAL CYCLE	58	58	DRAIN CONNECTION (OFF FLOOR)	11-1/2"-12-1/2"	(29-32cm)
<b>OPERATING CAPACITY</b>			<b>STANDARD DISHRACK</b>		
RACKS PER HOUR	60	60	DIMENSIONS	1 20" x 20"	1 (50.8 x 50.8cm)
<b>WASH TANK CAPACITY</b>	8 GAL.	(30.3 L)	<b>ELECTRICAL RATING</b>	<b>VOLTS</b>	<b>PHASE</b>
<b>PUMP CAPACITY</b>	68 GPM	(257 LPM)			<b>AMPS</b>
<b>WATER REQUIREMENTS</b>			WITHOUT BOOSTER	208 240 208 240 480	1 1 3 3 3
WITHOUT BOOSTER HEATER	180°F	(82°C)	WITH BOOSTER	208 240 208 240 480	1 1 3 3 3
WITH BOOSTER HEATER	120°F -140°F	(49°C - 60°C)			36 38 24 26 10
WATER INLET	3/4"	(1.9cm)			78 88 49 55 25
DRAIN CONNECTION	2"	(5.1cm)	<b>APPROXIMATE SHIPPING WEIGHT</b>		
RINSE PRESSURE SET	20 ±5psi	(1.41 kg/cm²)	WITHOUT BOOSTER	353#	(160kg)
<b>OPERATING TEMPERATURE</b>			WITH BOOSTER	396#	(180kg)
WASH-°F (MIN)	155°F-160°F	(68°C-71°C)			
RINSE-°F (MIN)	180°F-195°F	(82°C-90°C)			

### Summary Specifications: Model CMA-180TC

The model CMA-180TC Split Door single tank, high temperature dishwasher is designed for years of trouble free service, producing sparkling results while conserving energy, water and chemicals. This machine is available with an optional "built in" booster heater, assuring a continuous supply of 180°F hot water, and can accommodate dishes and utensils up to 27" high. Unique soil purging system filters wash water and plate debris into an external tray. The CMA-180TC is NSF, UL, CUL approved. Constructed entirely of stainless steel.

**Available Models:** ■ CMA-180TS Tall Straight Split Door ■ CMA-180TSB Tall Straight Split Door with Booster  
■ CMA-180TC Tall Corner Split Door ■ CMA-180TCB Tall Corner Split Door with Booster

**Advisory:** CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.



**CMA**  
**MIZER**  
Registered Trademark

CMA Dishmachines 12700 Knott Street Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • [www.cmadishmachines.com](http://www.cmadishmachines.com)

CMA reserves the right to modify specifications or discontinue models without prior notification.

© 7-2021 CMA, Inc.

an Ali Group Company



The Spirit of Excellence