




Rack Caddy forInsulated plastic underplates or
Dome covers

PROJECT:



LOCATION:

- Space saver
- Mobile
- Convenient

Facilitates dispensing of plastic underplates or dome covers in the central tray make-up procedure. Rack Caddys are furnished with removable cradles. Cradles can be placed on top of standard 20" x 20" dishwasher racks for washing in rack-type dishwashing machines. Soiled underplates can be loaded into the cradles for washing and removed, in bulk, to the Rack Caddy for storage and reuse. Spare cradles may be ordered to eliminate repeated cradle transfer.

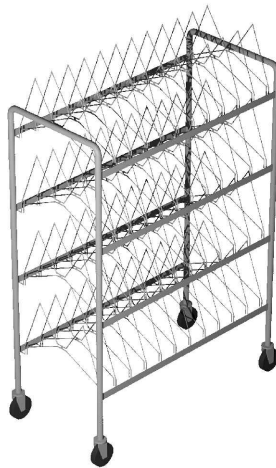

T-540
Capacity:
240 underplates
80 dome covers
Height = 5' 1-1/4"

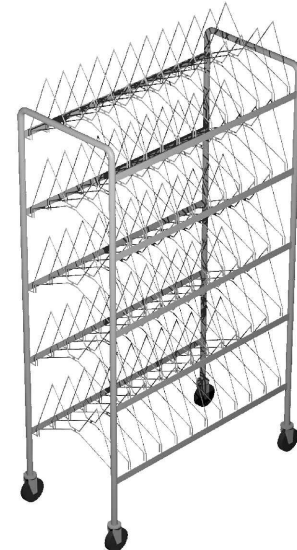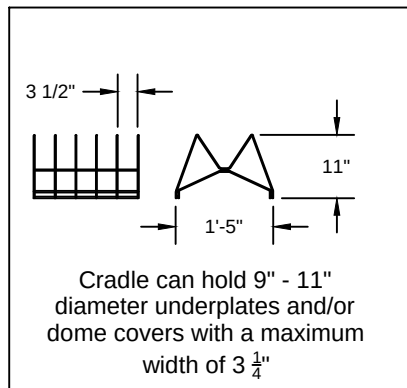

T-545
Capacity:
300 underplates
100 dome covers
Height = 6' 1-3/4"

General Specifications

Mega-Temp Rack Caddy to be Caddy Corporation model
T-_____.

Frame to be of 1" O.D. 16 gauge stainless steel tubing with 3/8" diameter stainless steel rod supports. Angle frames supporting cradles to be 12 gauge stainless steel all welded and polished construction. Set of two removable cradles for each shelf to be of welded 3/16" diameter rod entirely plastic finished. Clearance between cradles to be 3-5/16" and clearance between shelves to be 12-3/16". Casters to be 4" diameter heavy-duty swivel type casters with 3/4" stems and polyurethane tires. Two diagonal casters to have foot brakes.

Unit to be provided with the following accessories:

Accessories

- ☐ **ACC-38** - Circular bumpers. (Add 4" to length and width)
- ☐ **ACC-26*** - Extra plastic cradle

* Two required per shelf

**CADDY CORPORATION**

509 Sharptown Road P.O. Box 345
Bridgeport, NJ 08014-0345
Tel: 856-467-4222 Fax: 856-467-5511
internet: www.caddycorp.com