

# Flexible Hot Meal Delivery System



- Revolutionary technology featuring unparalleled long-term heat retention, durability, and reliability.
- Reliable, consistent heating of up to 20 Camduction Bases at once with independent functionality.
- Provides up to 5 trays per minute, improving trayline efficiency.

**CAMBRO**  
*Healthcare*

[www.cambro.com](http://www.cambro.com)

# Camduction® Complete Heat

## Consistent Heat Retention for Improved Patient Satisfaction

Use to quickly and efficiently heat up to 20 Camduction Bases at one time in 4 – 5.5 minutes from start up before each meal service.

Independent functionality of each slot supports both trayline and room service applications.


Independent functionality of each compartment reduces the risk of service interruption.

Energy efficient, unit turns off after 60 minutes of inactivity.

Flexible solution for preparing 20 to 300 meals per service period.

Camduction Charger is made of high-grade, durable stainless steel, remains cool to the touch.

Revolutionary technology eliminates errors or issues with variations in voltage.

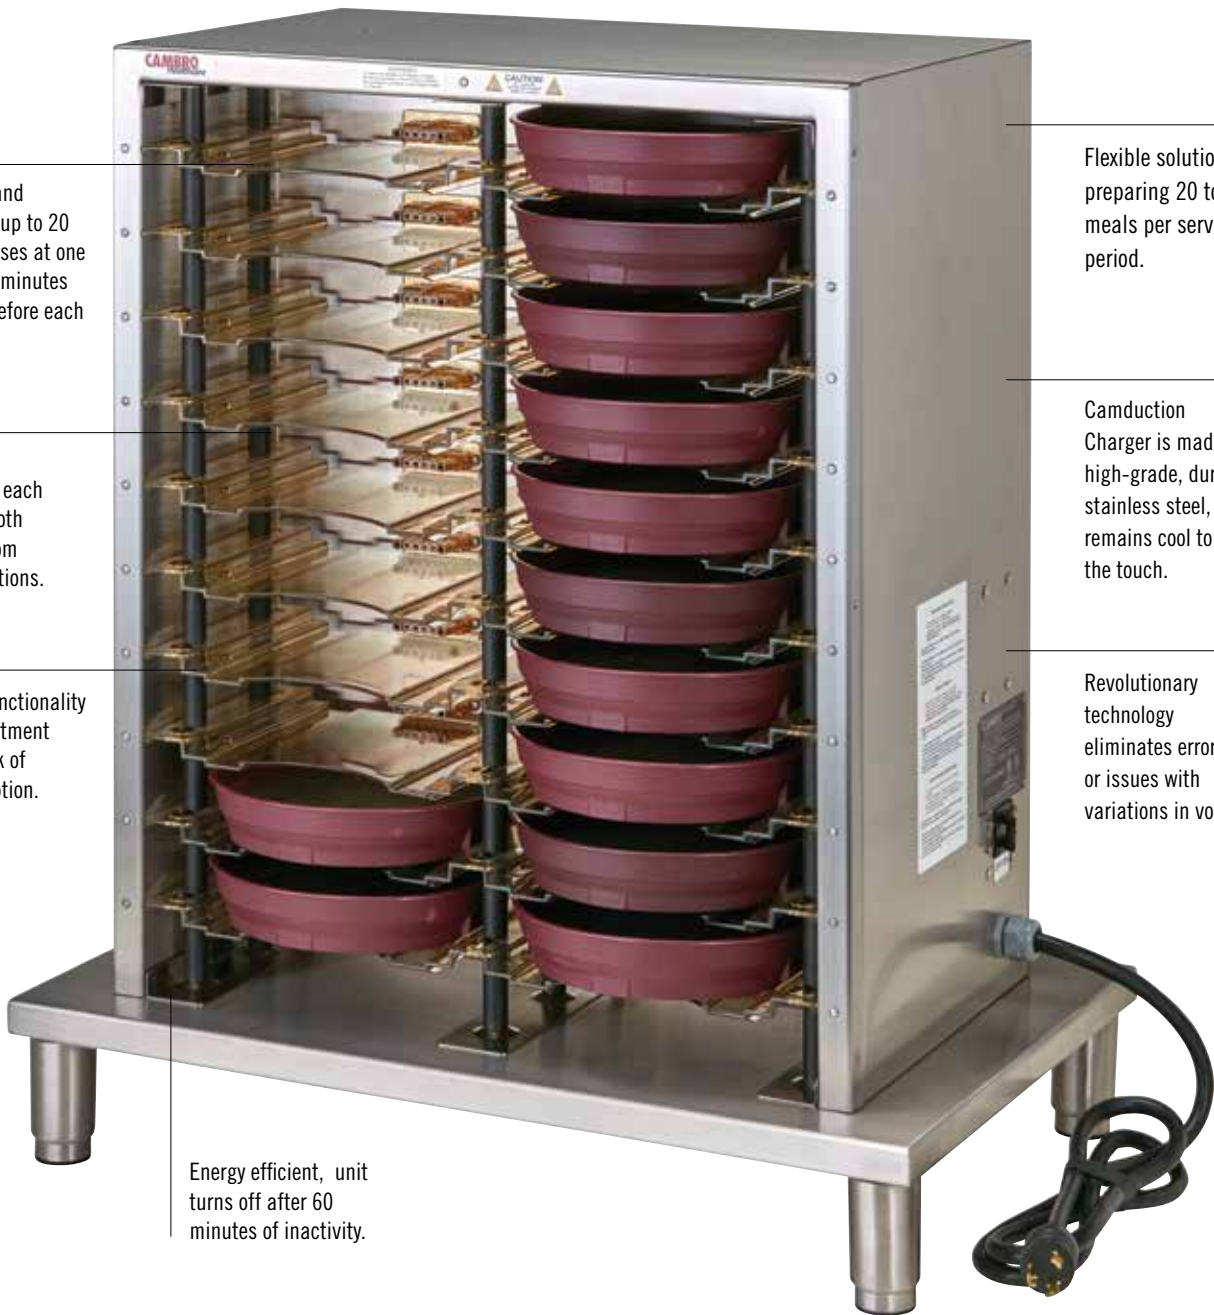

Year Warranty on Camduction chargers.



## Flexible Hot Meal Delivery System

Cambro Healthcare is dedicated to providing the most durable, reliable and value-added meal delivery system. The Camduction Complete Heat System is designed to perform consistently under the most demanding conditions of healthcare foodservice.




**2** Year Pro-rated Warranty on Bases.

### The Camduction Base System

A heated Camduction Base, combined with a properly heated 9" (22,8 cm) Cambro Ceramic Plate, covered with a Cambro Shoreline or Harbor Insulated Dome will hold hot food at safe temperatures 140°F (60°C) or higher for 45 minutes.

- Cool rims are safe to touch.
- Bases are durable and dishwasher safe.
- Resistant to chips, cracks, and breaks.
- Revolutionary technology eliminates errors or issues with spikes in voltage.
- Bases and domes are available in Shoreline and Harbor colors.

### The Results of the Camduction Complete Heat System

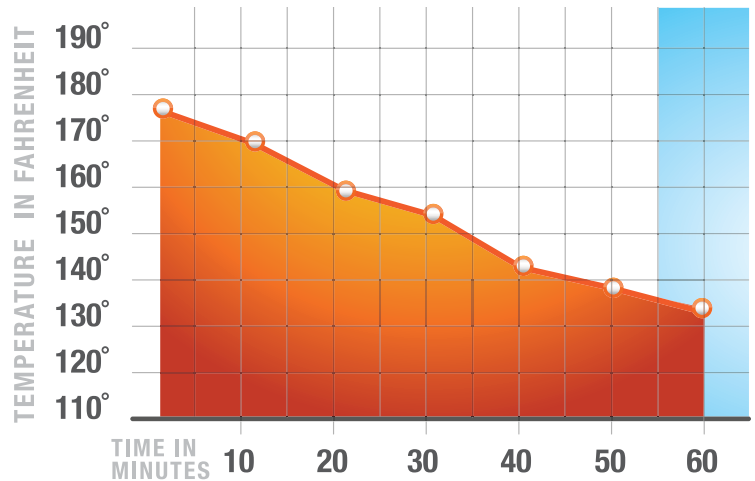

**NOTE:** Operator results may vary based on menu items and starting temperatures.



Safe to the touch even when fully charged.

#### Colors



\*Colors available in Shoreline Collection only.  
\*\*Colors available in Harbor Collection only.

# Camduction® Complete Heat System

Maximizing performance is best done using the right system and accessories.

## Base Charger

<b>CODE</b>	<b>MDSDC9X1</b>
<b>DESCRIPTION</b>	Single Phase
<b>CAPACITY</b>	20 Bases
<b>VOLTAGE/PHASE</b>	208-240 VAC Single Phase
<b>AMPS</b>	18
<b>HZ</b>	50/60
<b>PLUG CONFIGURATION</b>	NEMA L6-30P
<b>CORD LENGTH</b>	6 feet (183 cm)
<b>PRODUCT DIMENSIONS W x D x H</b>	30" x 18½" x 34¾" (76,2 x 47,9 x 87,9 cm)
<b>PRODUCT WEIGHT</b>	108 lbs. (49,2 kg)
<b>INITIAL HEAT UP TIME</b>	4-5.5 Minutes*
<b>ALL INDICATOR LIGHTS</b>	LED

Case Pack: 1 Color: Stainless Steel (000).

\* Based on voltage supply. \*\* A heated Base will be ready for use every 12 seconds (based on voltage supply) when being removed and replaced during meal service.



The Camduction Base provides reliable hot temperature retention.

## Camduction Base

CODE	DESCRIPTION	DIMENSIONS L x W x H	CASE LBS. (CUBE) CASE KG. (CUBE M <sup>3</sup> )	CASE PACK
MDSDCB9	Camduction Base	9⅞" Dia. x 1⅝" H (23,3 Dia x 4,8 cm H)	32.5 (0,71) 14,74 (0,02)	12

**MDSDCB9 Colors:** Meadow (447), Wheat (457), Cranberry (487), Navy Blue (497), Speckled Gray (480), Black (110), Metallic Blue (489), Smoked Metal (485).

Camduction Base covered by U.S. Patent D630,897 S.

## Accessories

CODE	DESCRIPTION	DIMENSIONS L x W x H	CASE LBS. (CUBE) CASE KG. (CUBE M <sup>3</sup> )	CASE PACK
MDSHD9	Harbor Insulated Dome	10¼" Dia. x 3⅜" H (25,94 Dia x 8,17 cm H)	9.46 (1.42) 4,3 (0,04)	12
MDS9	Shoreline Insulated Dome	10¼" Dia. x 3⅜" H (25,8 Dia x 7,3 cm H)	10.92 (1.43) 4,7 (0,02)	12
MDSL9	Shoreline Low Profile Insulated Dome	10¼" Dia. x 2¼" H (25,8 Dia x 6,99 cm H)	9.78 (1.11) 4,44 (0,03)	12
MDSPL9	9" (22,9 cm) Ceramic Plate	9" Dia. x 1" H (22,8 Dia x 2,5 cm H)	38.80 (0.81) 17,23 (0,02)	24
CPMU244875PDPKG	Angled Drying Rack	48" x 24" x 75" (122 x 61 x 191 cm)	118.35 (25.2) 53,8 (0,71)	1
BC340KDL	KD Utility Cart Low Profile	40" x 22" x 33¼" (101,6 x 55,88 x 84,46 cm)	37.95 (6.74) 17,21 (0,19)	1

**MDSHD9 Colors:** Meadow (447), Cranberry (487), Navy Blue (497), Black (110), Metallic Blue (489), Smoked Metal (485).

**MDS9, MDSL9 Colors:** Meadow (447), Wheat (457), Cranberry (487), Navy Blue (497), Speckled Gray (480), Black (110).

**CPMU244875PDPKG Color:** Cart - Speckled Gray (480), 8-Slot Drying Cradle - Soft Gray (151).

Camduction Charger covered by U.S. Patent 8,263,906 B2.



## Complementary Products



### Angled Drying Rack

A convenient, non-corrosive, sanitary drying and storage solution. Securely holds 128 meal delivery Pellets/Bases and a variety of pans, pots and kitchen wares.



### Harbor Meal Delivery System

Contemporary look, high performance and unequalled safety at a budget-friendly price.



### Non-Skid Versa Camtray®

Save waste and cost by eliminating the use of tray mats. The non-skid surface reduces spills and improves safety.

For more information about Cambro products visit [www.cambro.com](http://www.cambro.com) or contact your Distributor, Cambro Sales Representative or the Cambro Customer Service Department.