

## DURAPAN™ SERIES

ELECTRIC, OPEN OR MODULAR BASE,  
30 & 40 GALLON (115 & 150 LITER)

Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
FCSI Section 11400 \_\_\_\_\_  
Approved \_\_\_\_\_  
Date \_\_\_\_\_

# Braising Pans / Tilting Skilleets

### Models

- SEL-30-TR • SEM-30-TR
- SEL-40-TR • SEM-40-TR



Open base model shown

- Space-Saving Design- No Clearance Required at rear or sides (optional Faucet and Console requires 4 1/2" on one side)
- All Stainless Steel Construction for durability and easy cleaning
- Adjustable, Electronic Thermostat controls temperature from 100°F to 425°F
- High Efficiency Heating System with even heat distribution - 14 kW's for 30 gallon models, 18 kW's for 40 gallon models
- Fast Heat-Up and Recovery Time-Preheats in 15 minutes, full capacity from cold to boiling in 60 minutes
- Spring Assist Cover with Adjustable Vent and Full Width Handle
- On/Off Switch, Thermostat Knob and Pilots, recessed to avoid breakage
- Four Stainless Steel, Level adjustable feet, rear flanged for bolting
- Serviceable from the front of the unit
- Two Pilot Lights; Green = Power on, Amber = Temperature Cycling
- Meets IPX6 Water Rating Requirements
- High Limit Safety Device set at 450°F (232°C)
- Anti-Splash Pouring Lip
- Typical approvals include UL, CSA, CE and NSF

### Short Form Specifications

Shall be CLEVELAND, Tilting Skillet;  
Model SE - \_\_\_\_\_ - TR \_\_\_\_\_ KW, \_\_\_\_\_ Volts  
holding no less than \_\_\_\_\_ gallons ( \_\_\_\_\_  
liters); Complete with thermostatic and Safety  
Controls; Gallon Markings; Stainless Steel Clad;  
5/8" Cooking Surface; Hand Tilt; Spring Assist  
Cover with adjustable Vent. All Stainless Steel  
Construction. No Clearances Required.

### Standard Features

- Leg or Modular Base
- Full 30/40 Gallon (115/150 Liters) Capacity Rating to Bottom of Pouring Lip
- Hydraulic Hand Tilt with quick lowering feature (HTS)
- Stainless Steel Clad 5/8" Cooking Surface Guaranteed against warpage
- Stainless Steel Coved Cornered Pans with both Gallon and Liter Markings

### Options & Accessories

- Sliding Drain Drawer with Splash Screen (SLD) (for SEL models only)
- Power Tilt with Hand Tilt Override (PT1)
- Double or Single Pantry Faucet (SPS14, DPS14), includes Faucet Mounting Bracket
- Double or Single Pantry Skillet Filler with 60" hose (SKF-S or DKF-S)
- Hot & Cold Water Pre-Rinse Spray Head with Hose (PRS-S)
- Voltage Options:
  - VOSK1, 240 Volt, 60 Hz, 3 Phase
  - VOSK2, 380/415 Volt, 50 Hz, 3 Phase - for export
  - VOSK3, 440/480 Volt, 60 Hz, 3 Phase
- Food Strainers for pouring spout (FS)
- Vegetable Steamers (VS)
- Poaching Pans (PP)
- Wall Mounting (WMS)
- In-Wall Carriers (IWCS)
- Pan Carriers (PCS), not available on 30 gallon models with a Tangent Draw-Off Valve
- 2" Tangent Draw-Off Valve (TD2), left side only



| MODEL            | A          | B          | C              | D         | E          | F         | G              |
|------------------|------------|------------|----------------|-----------|------------|-----------|----------------|
| <b>SEL-30-TR</b> | <b>36"</b> | <b>32"</b> | <b>9"</b>      | <b>5"</b> | <b>20"</b> | <b>3"</b> | <b>32 7/8"</b> |
|                  | (915mm)    | (812mm)    | (229mm)        | (127mm)   | (508mm)    | (76mm)    | (835mm)        |
| <b>SEL-40-TR</b> | <b>48"</b> | <b>44"</b> | <b>12 1/8"</b> | <b>8"</b> | <b>22"</b> | <b>6"</b> | <b>44 7/8"</b> |
|                  | (1220mm)   | (1118mm)   | (308mm)        | (203mm)   | (559mm)    | (153mm)   | (1140mm)       |

## SPECIFICATIONS

| CLEARANCE                                             | APPROX. SHIPPING WEIGHTS & DIMENSIONS |                  |
|-------------------------------------------------------|---------------------------------------|------------------|
| <b>RIGHT:</b> 1" (26mm)<br>(4 1/2"/115mm with Faucet) | <b>SEL-30-TR</b>                      | <b>SEL-40-TR</b> |
|                                                       | Weight - 503 lbs                      | Weight - 610 lbs |
|                                                       | Width - 44"                           | Width - 48"      |
| <b>LEFT:</b> 1" (26mm)                                | Depth - 44"                           | Depth - 58"      |
| <b>REAR:</b> 1" (26mm)                                | Height - 55"                          | Height - 54"     |



EXTERIOR HINGES  
(REQUIRED FOR  
OPTIONAL TD 2)

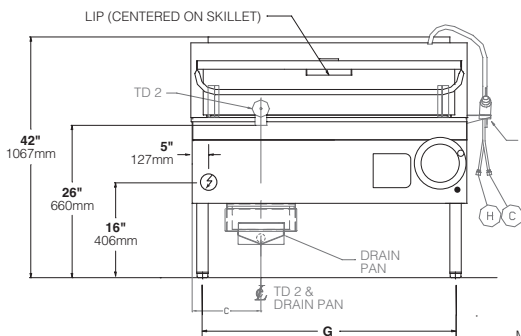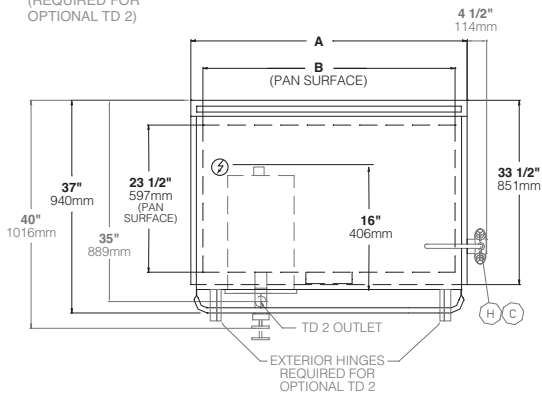

**NOTE** NON STANDARD ITEMS ARE SHOWN IN GRAY





## ELECTRICAL

| SEL-30-TR & SEM-30-TR (Standard Wattage) |    |    |             |      |           |  |
|------------------------------------------|----|----|-------------|------|-----------|--|
| Volts                                    | Ph | Hz | Total Watts | Amps | Wire Size |  |
| 208                                      | 1  | 60 | 14400       | 69.2 | 4         |  |
| 208                                      | 3  | 60 | 14400       | 40   | 8         |  |
| 240                                      | 1  | 60 | 14400       | 60   | 6         |  |
| 240                                      | 3  | 60 | 14400       | 34.6 | 8         |  |
| 380                                      | 1  | 50 | 14400       | 37.9 | 8         |  |
| 380                                      | 3  | 50 | 14400       | 21.9 | 10        |  |
| 416                                      | 1  | 50 | 14400       | 34.6 | 8         |  |
| 416                                      | 3  | 50 | 14400       | 20   | 10        |  |
| 480                                      | 1  | 60 | 14400       | 30   | 8         |  |
| 480                                      | 3  | 60 | 14400       | 17.3 | 10        |  |


| SEL-40-TR & SEM-40-TR (Standard Wattage) |    |    |             |      |           |  |
|------------------------------------------|----|----|-------------|------|-----------|--|
| Volts                                    | Ph | Hz | Total Watts | Amps | Wire Size |  |
| 208                                      | 1  | 60 | 18000       | 86.5 | 3         |  |
| 208                                      | 3  | 60 | 18000       | 50   | 6         |  |
| 240                                      | 1  | 60 | 18000       | 75   | 4         |  |
| 240                                      | 3  | 60 | 18000       | 43.4 | 8         |  |
| 380                                      | 1  | 50 | 18000       | 47.3 | 6         |  |
| 380                                      | 3  | 50 | 18000       | 27.3 | 10        |  |
| 416                                      | 1  | 50 | 18000       | 43.3 | 6         |  |
| 416                                      | 3  | 50 | 18000       | 25   | 10        |  |
| 480                                      | 1  | 60 | 18000       | 37.5 | 6         |  |
| 480                                      | 3  | 60 | 18000       | 21.7 | 10        |  |

## CAPACITIES

In 4 oz. servings. Other sizes may be calculated.  
 30 gallons / 115 Liters ..... 960  
 40 gallons / 150 Liters ..... 1280

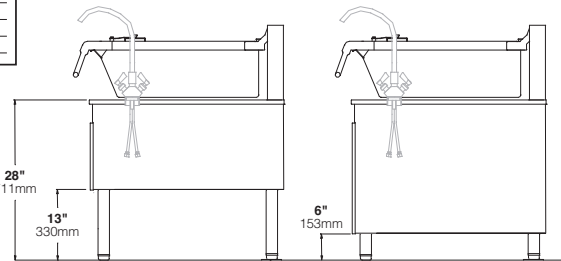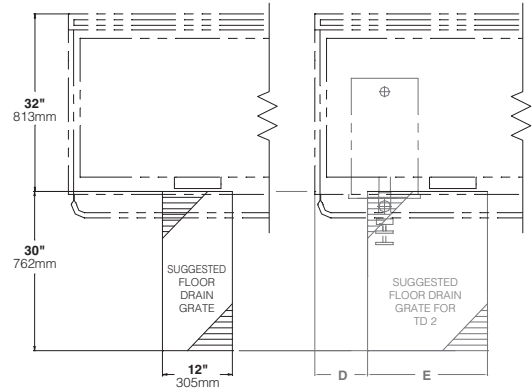

**FLANGED FOOT DETAIL**  
(REAR LEGS ONLY)

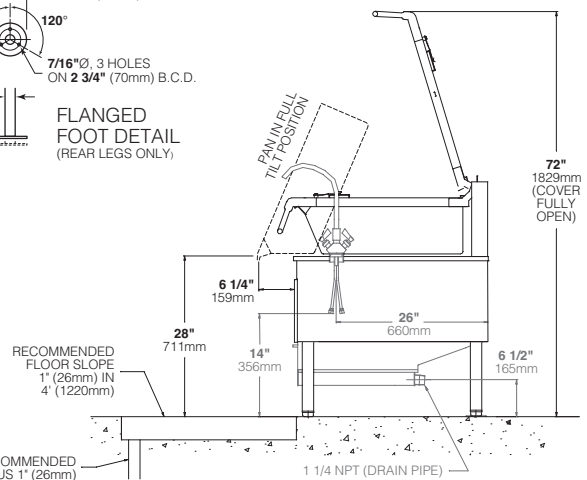

## NOTES:

Cleveland Range reserves right of design improvement or modification, as warranted.  
 Many regional, state and local codes exist and it is the responsibility of the owner and installer to comply with the codes.  
 Cleveland Range equipment is built to comply with applicable standards for manufacturers. Included among those approval agencies are U.L., NSF, CGA, CSA, ETL and others.

(NOT TO SCALE)