



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME: _____

LOCATION: _____

SPECIFIER ITEM NO. _____ QTY: _____

ENCORE PART NO. _____

Encore® QUIK-FLO™ Rotary Drain

DBN-8000 Series

DBN-8000-X	Capped Overflow Outlet
DBN-8000-SPI	Capped Overflow Outlet, Flat Strainer
DBN-8015-SPI	Overflow Assembly, Flat Strainer



Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Nickel plated cast brass drain body
- Self-centering stainless steel face flange
- Stainless steel rotary handle
- 3 times the flow rate of conventional lever drains
- Services from the top; no disassembly required


SPECIFICATIONS:

QUIK-FLO Rotary Drain to be Encore DBN-8000 Series in the following configuration:

_____ DBN-8000-X	Capped Overflow Outlet
_____ DBN-8000-SP1	Capped Overflow Outlet, Flat Strainer
_____ DBN-8015-SP1	Overflow Assembly, Flat Strainer

Drain to have nickel plated solid all metal construction. Drain to be for 3-1/2" sink opening diameter. Drain to have self-centering stainless steel face flange with stainless steel beehive crumb cup strainer. Drain to be designed for trouble free fast drainage when the stainless steel rotary handle is in the open position and has a positive sealing action when closed. Drain to accept 1-1/4" OD overflow elbow tube. To be universal style for use with both 2" or 1-1/2" NPSM outlet.

US Patent 6, 145, 136

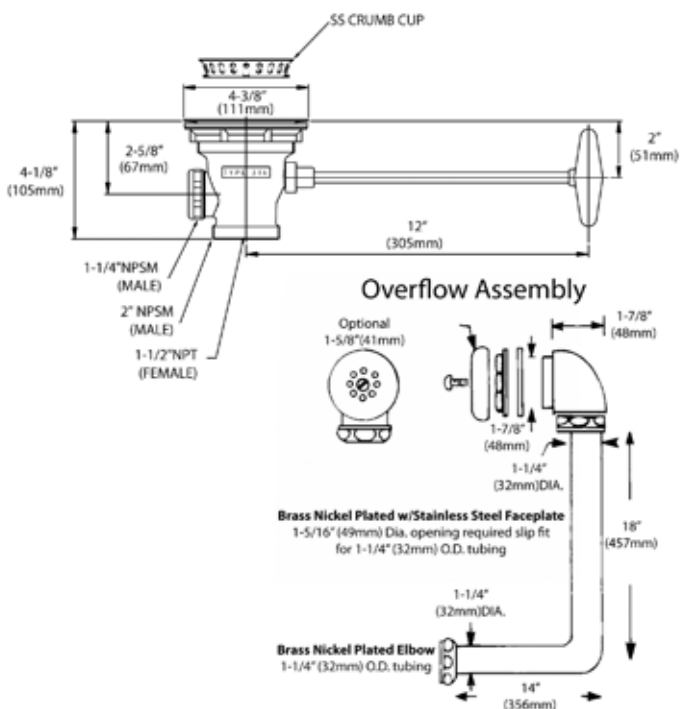

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/2" or 2" NPS Male waste outlet
Flow Rate: Max 40gpm

Approximate shipping weight - 5 lbs
Warranty - 2 years parts



COMPLIES WITH:
ANSI A112.18.1/B125