


PROJECT NAME: _____
LOCATION: _____
SPECIFIER ITEM NO. _____ **QTY:** _____
ENCORE PART NO. _____

Encore® Low Lead 4" (102mm) Deck Mount Faucet with Swing Spout, and 4" Wrist Blade Handles

KL41-4xxx-SE4 Series

KL41-4106-SE4	6" Spout, Ceramic Valves
KL41-4006-SE4	6" Spout, Compression Valves
KL41-4108-SE4	8" Spout, Ceramic Valves
KL41-4008-SE4	8" Spout, Compression Valves
KL41-4110-SE4	10" Spout, Ceramic Valves
KL41-4010-SE4	10" Spout, Compression Valves
KL41-4112-SE4	12" Spout, Ceramic Valves
KL41-4012-SE4	12" Spout, Compression Valves

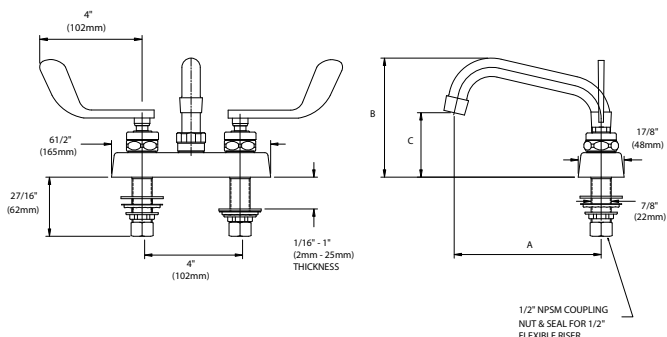

Dimensions shown in inches (mm) are for reference only and are subject to change.

1/2" NPS Male Inlets

Operating Temperature: 40 - 180°F (5 - 83°C)

Operating Pressure: 15 - 125psi

Note: 1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples

Approximate shipping weight - 5 lbs
Warranty - 2 years parts

Solid heavy duty low lead cast body is specification and commercial quality for hand sinks.

Commercial Quality Features

- Tubular swing spout design
- ADA-compliant 4" wrist blade handles
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

SPECIFICATIONS:

Low Lead Deck Mount Faucet to be Encore KL41 Series in the following configuration:

_____	KL41-4006-SE4	6" Spout, Compression Valves
_____	KL41-4106-SE4	6" Spout, Ceramic Valves
_____	KL41-4008-SE4	8" Spout, Compression Valves
_____	KL41-4108-SE4	8" Spout, Ceramic Valves
_____	KL41-4010-SE4	10" Spout, Compression Valves
_____	KL41-4110-SE4	10" Spout, Ceramic Valves
_____	KL41-4012-SE4	12" Spout, Compression Valves
_____	KL41-4112-SE4	12" Spout, Ceramic Valves

Faucet body to be constructed of polished chrome plated brass. Handles to be 4" wrist blade. Supply inlets to be 4" on center. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be stainless steel tubular swing style with leak proof double O-ring seal design. Color coded temperature indexes shall meet international standards. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL41-4006-SE4	6"(152 mm)	4-3/8"(111mm)	2-5/8"(66mm)
KL41-4106-SE4	6"(152 mm)	4-3/8"(111mm)	2-5/8"(66mm)
KL41-4008-SE4	8"(203mm)	5-5/16"(135mm)	3-1/16"(78mm)
KL41-4108-SE4	8"(203mm)	5-5/16"(135mm)	3-1/16"(78mm)
KL41-4010-SE4	10"(254mm)	5-13/16"(148mm)	3-9/16"(90mm)
KL41-4110-SE4	10"(254mm)	5-13/16"(148mm)	3-9/16"(90mm)
KL41-4012-SE4	12"(304mm)	6-1/4" (159mm)	4"(102mm)
KL41-4112-SE4	12"(304mm)	6-1/4" (159mm)	4"(102mm)

COMPLIES WITH:

ASME A112.18.1-2005

CSA B125.1-05

NSF/ANSI 61/9, ANNEX G

SECTION 116875 OF THE
CALIFORNIA HEALTH & SAFETY CODE
(COMMONLY KNOWN AS AB1953)

VERMONT ACT 193

UNIFORM PLUMBING CODE



KL41-4xxx-SE4 Series



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

Faucet Configuration for KL41-4000 Series

