

PROJECT NAME: _____
LOCATION: _____
SPECIFIER ITEM NO. _____ **QTY:** _____
ENCORE PART NO. _____

Encore[®] Low Lead Utility Spray
Valve Assembly with Grip

KL50-0220-xxx

KL50-0220-065	.65 GPM Rated Flow
KL50-0220-12	1.2 GPM Rated Flow
KL50-0220-16	1.6 GPM Rated Flow



Heavy duty pre-rinse spray valve assembly designed to withstand demands of foodservice operations

Commercial Quality Features

- Easy retro-fit to existing pre-rinSES or available as complete kit
- Spray assembly is interchangeable with all makes of pre-rinSES
- Polished chrome plated brass spray valve
- Ergonomic handle fits comfortably even in small hands; easy to use
- Non-marring, dish sensitive impact resistant bumper
- Reinforced thermoplastic face plate prevents flexing, bumper wear

Kool Grip[™] Hose Grip

- Reduces heat transfer to the hand; stays up to 30 degrees cooler than competitors' grips


Specifications:

Pre-rinSE spray valve assembly to be Encore KL50-0220 Series in the following configuration:

_____ KL50-0220-065	.65 GPM Rated Flow
_____ KL50-0220-12	1.2 GPM Rated Flow
_____ KL50-0220-16	1.6 GPM Rated Flow

Spray valve assembly to be constructed of polished chrome plated brass. Handle includes hold-open ring. Non-marring, dish sensitive, impact resistant bumper provides a positive, non-leaking seal made from a heat resistant material that will not fatigue under extreme operating temperatures. Reinforced thermoplastic face plate prevents flexing and premature bumper wear.

*Note: All flow rates are @ 60psi.

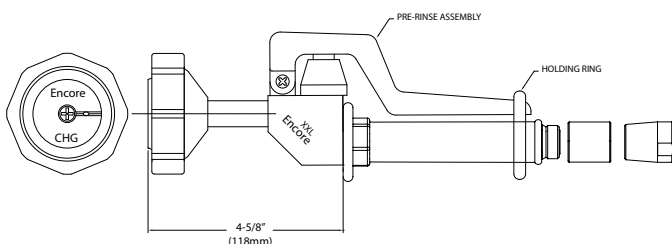

Dimensions shown in inches (mm) are for reference only
and are subject to change.

1/2" NPSM Male Inlets
Operating Temperature: 40-180°F (5-83°C)
Operating Pressure: 15-125psi

Approximate shipping weight - 2 lbs
Warranty - 3 years parts

COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD
IN DRINKING WATER ACT" -
2011 - US SENATE BILL NO. S.3874
NSF/ANSI 61/9, ANNEX G

