

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_

**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> Single Hole Deck Mount  
 Pre-Rinse Assembly

**KL50-MINI-xx Series**

- KL50-MINI without wall bracket
- KL50-MINI-BR with wall bracket (shown)
- KL50-MINI-BS with S/S spring & wall bracket
- KL50-MINI-S with S/S spring



Approximate shipping weight - 13 lb  
 Warranty - 3 years parts

Heavy duty pre-rinse assembly designed to withstand the demands of commercial operations.

**Low-Flow Spray Valve**

- 1.6gpm Flat Spray
- Spray head hook holds spray head away from work area when not in use
- Heat resistant, non-marring, impact resistant bumper will not fatigue under extreme operating temperatures

**Encore Premium Hose Feature**

- 3-ply nylon reinforced Santoprene<sup>®</sup> inner hose provides maximum durability
- Interlocking helical coils of stainless steel outer hose shroud protect inner hose
- Patented stainless steel strain relief spring transfers and distributes load stress to significantly improve hose life
- High pressure hydraulic fittings on hose ends tested to 400psi
- Washerless design incorporates temperature resistant O-rings to provide leak-proof seal on all hose assemblies and hose grips

**Kool Grip<sup>™</sup> Hose Grip**

- Reduces heat transfer to the hand; stays up to 30 degrees cooler than competitors' grips
- Ergonomic spray handle fits comfortably in even small hands and is easy to use

**SPECIFICATIONS:**

Deck Mount Pre-Rinse Assembly to be Encore KL50-MINI Series in the following configuration:

- \_\_\_\_\_ KL50-MINI Without Wall Bracket
- \_\_\_\_\_ KL50-MINI-BR With Wall Bracket
- \_\_\_\_\_ KL50-MINI-BS With S/S Spring & Wall Bracket
- \_\_\_\_\_ KL50-MINI-S With S/S Spring

Pre-rinse body to be constructed of polished chrome plated brass. Pre-rinse hose to be constructed of 3-ply nylon reinforced Santoprene<sup>®</sup> permanently secured with high pressure hydraulic fittings pressure tested to 400 psi. Hose to be of washerless, leak-proof design, protected by interlocking helical stainless steel coils for maximum protection and flexibility. Patented stainless steel strain relief spring transfers load stress. Heavy-duty ergonomic gooseneck spring ensures proper hose position. A patented wall bracket with compression fitting is provided with model KL50-MINI-BR and KL50-MINI-BS to facilitate installation and give 360° of support. Riser to include spray head hook to hold spray head away from work area when not in use. Spray head to be furnished with 1.6gpm\* Water Saver Spray. Spray assembly to be equipped with Kool Grip<sup>™</sup> handle to reduce heat transfer to hand.

\*All flow rates are @ 60psi

COMPLIES WITH:  
 THE FEDERAL "REDUCTION OF LEAD  
 IN DRINKING WATER ACT" -  
 2011 - US SENATE BILL NO. S.3874  
 NSF/ANSI 61/9, ANNEX G




# KL50-MINI-xx Series

## Single Hole Deck Mount Pre-Rinse Assembly

PREMIUM PLUMBING PRODUCTS  
**Encore**<sup>®</sup>

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701  
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110  
[www.encoreplumbing.com](http://www.encoreplumbing.com) • [www.componenthardware.com](http://www.componenthardware.com)

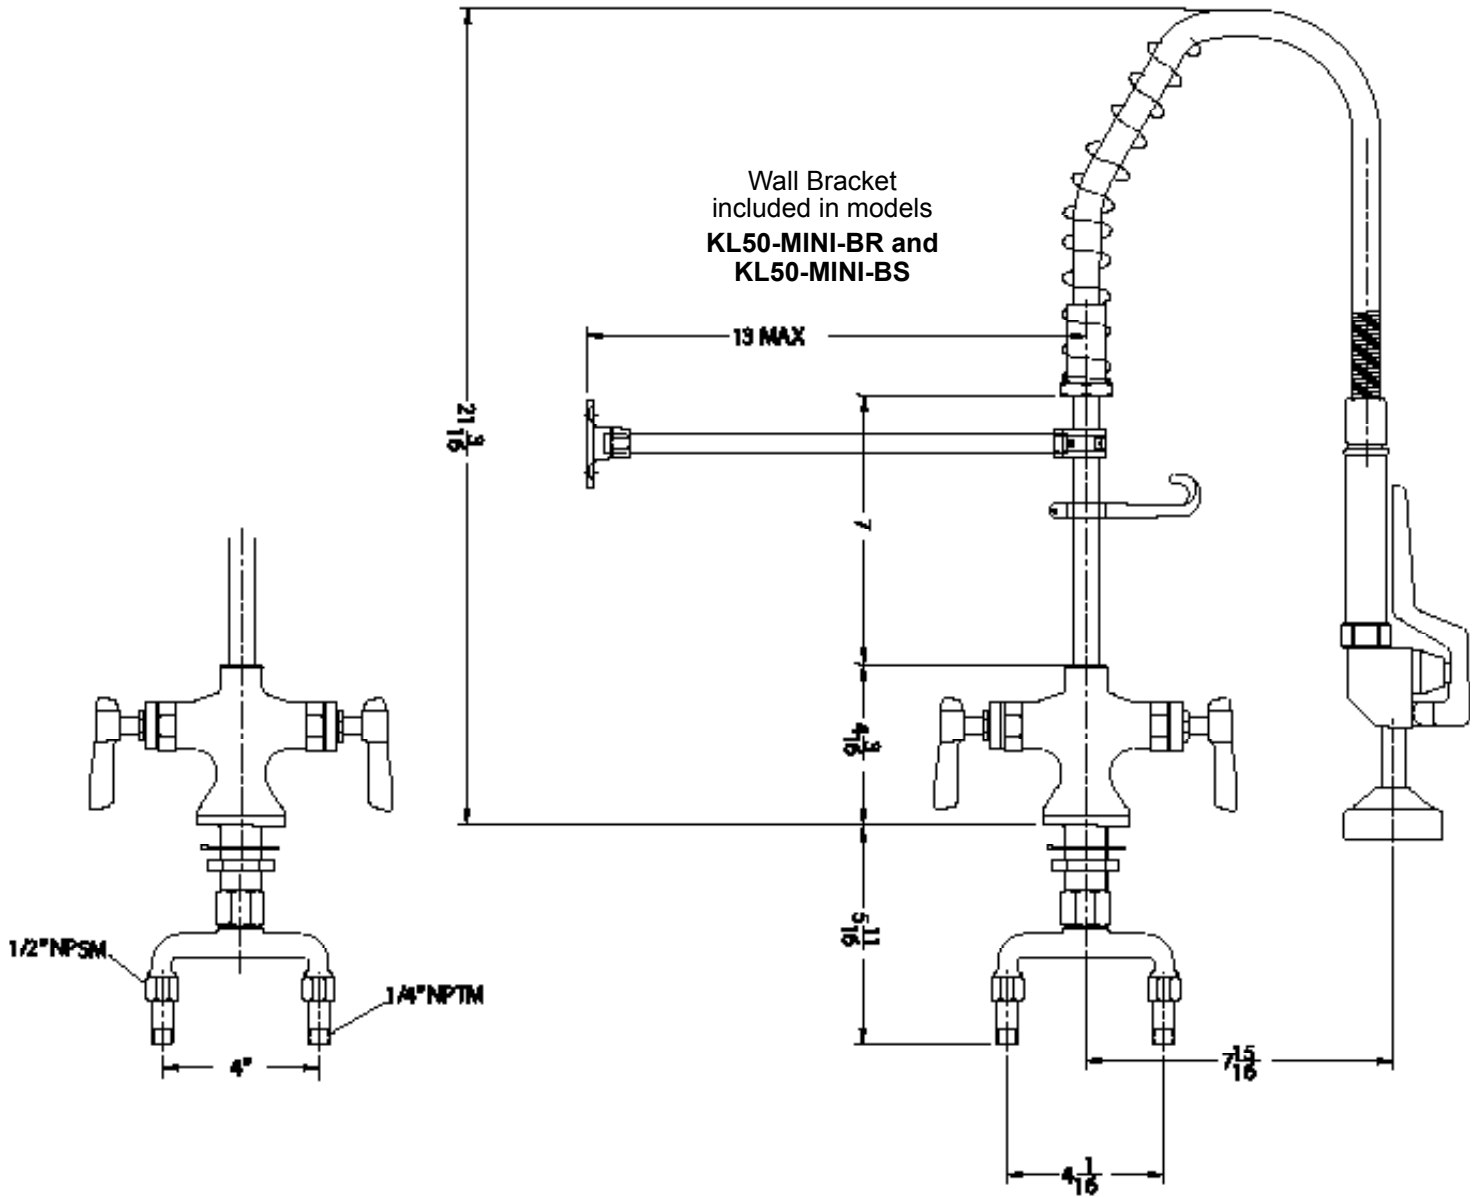

1-1/2" (29mm) hole for deck is recommended to accommodate 1/2" supply nipples.  
 1/2" NPSM Male Inlets  
 Operating Temperature: 40 - 180°F (5 - 83°C)  
 Operating Pressure: 15 - 125psi

*Dimensions shown in inches (mm) are for reference only and are subject to change.*