

PROJECT NAME: _____

LOCATION: _____



SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Single Wall Mount Faucet with
 18" Double Jointed Tubular Spout

KL70-9x18 Series

KL70-9018 Compression Valve
 KL70-9118 Ceramic Valve

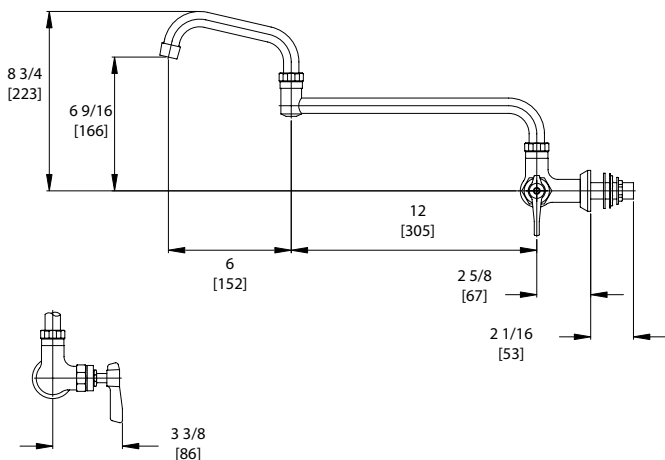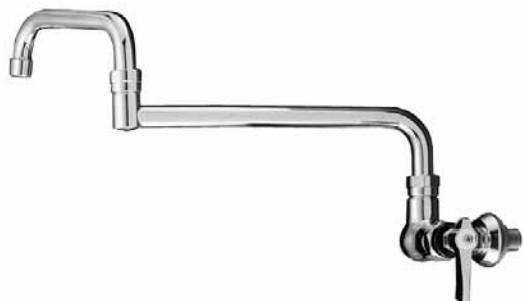

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) hole for wall is recommended to accommodate 1/2" supply nipple.

Operating Temperature: 40 - 180°F (5 - 83°C)

Operating Pressure: 15 - 125psi

Approximate shipping weight - 5 lbs

Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- 18" (457mm) double jointed tubular spout design
- ADA-compliant single lever handle
- Stainless steel spout

SANIGUARD[®] Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Wall Mount Faucet to be Encore KL70 Series in the following configuration:

_____ KL70-9018 Compression Valve
 _____ KL70-9118 Ceramic Valve

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Lever handle to be incorporated with SANIGUARD treatment. Valve to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be 18" stainless steel double jointed tubular style. 2.2gpm aerator @ 60psi standard with full flow stream bubbler screen spout tip.



COMPLIES WITH:
 THE FEDERAL "REDUCTION OF LEAD
 IN DRINKING WATER ACT" -
 2011 - US SENATE BILL NO. S.3874
 NSF/ANSI 61/9, ANNEX G

