



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
 Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
 www.toplineplumbing.com

PROJECT NAME: _____

LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

TOP-LINE PART NO. _____


TOP-LINE® Low Lead 8" OC Wall Mount
 Faucet with Swivel Gooseneck Spout and
 Quarter Turn Ceramic Valves

TLL13-810x-SE1MK Series

TLL13-8100-SE1MK 3" Swivel Gooseneck Spout

TLL13-8101-SE1MK 8" Swivel Gooseneck Spout

TLL13-8102-SE1MK 6" Swivel Gooseneck Spout

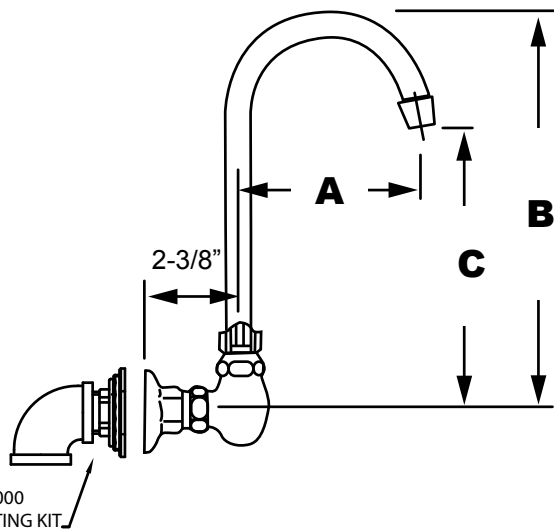

Dimensions shown in inches (mm) are for reference only
 and are subject to change.

1-1/8" (29mm) holes for wall are
 recommended to accommodate 1/2" supply nipples
 1/2" NPS Male Inlets
 Operating Temperature: 40 - 180°F (5 - 83°C)
 Operating Pressure: 15 - 125psi

Approximate shipping weight - 4 lbs
 Warranty - 1 year

Solid heavy duty low lead cast body is specification and commercial quality.

Commercial Quality Features

- Quarter turn ceramic valves
- Built-in check valve to prevent cross-flow and back-flow
- Stainless steel swivel gooseneck spout
- ADA-compliant lever handles
- Leak proof double O-ring spout design
- Gaskets and seals rated to 180°F

SPECIFICATIONS:

Low Lead 8" OC Wall Mount Faucet to be TOP-LINE TLL13-810x-SE1MK Series in the following configuration:

_____ TLL13-8100-SE1MK	3" Swivel Gooseneck Spout
_____ TLL13-8101-SE1MK	8" Swivel Gooseneck Spout
_____ TLL13-8102-SE1MK	6" Swivel Gooseneck Spout

Faucet body to be constructed of polished chrome plated brass. Valves to be quarter turn ceramic type. Handles to be lever style. Spout to be stainless steel swivel gooseneck style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard. Includes KL40-1000 mounting kit.

Model No.	A	B	C
TLL13-8100-SE1MK	3-1/2" (89mm)	8-1/4" (210mm)	5-1/2" (140mm)
TLL13-8101-SE1MK	8-1/2" (216mm)	12" (305mm)	6-1/2" (165mm)
TLL13-8102-SE1MK	6" (152mm)	9-1/4" (235mm)	5-1/4" (133mm)



NSF - 61/9-372 - U.P. Code
 ASME A112.18.1/CSA B125.1

