



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.toplineplumbing.com

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ **QTY:** _____

TOP-LINE PART NO. _____

TOP-LINE® Low-Lead Single Deck Mount
Pantry Faucet with Swivel Gooseneck Spout
and Quarter Turn Ceramic Valves

TLL20-910x Series

TLL20-9100-SE1 3" Swivel Gooseneck Spout
TLL20-9101-SE1 8" Swivel Gooseneck Spout
TLL20-9102-SE1 6" Swivel Gooseneck Spout

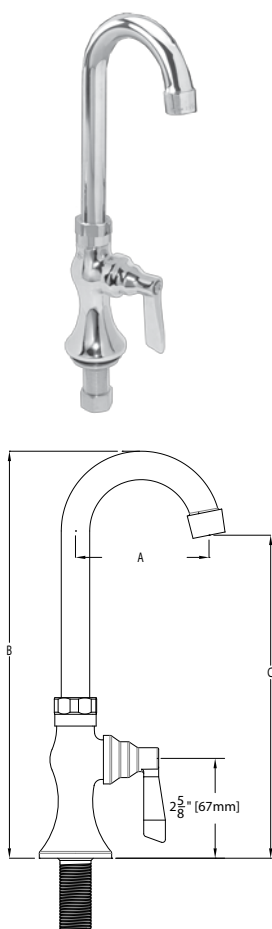

Dimensions shown in inches (mm) are for reference only
and are subject to change.

1-1/8" Holes for Deck
1/2" NPSM Male Inlet
Operating Temperature: 40-180°F (5-83°C)
Operating Pressure: 15-125psi

Approximate shipping weight - 5 lbs
Warranty - 1 year

Solid heavy duty cast brass body is specific and commercial quality

Commercial Quality Features

- Quarter turn ceramic valves
- Built-in check valve to prevent cross-flow and back-flow
- Stainless steel swivel gooseneck spout design
- ADA-compliant lever handle
- Leak proof double O-ring spout design
- Gaskets and seals rated to 180°F

SPECIFICATIONS:

Low Lead Single Deck Mount Pantry Faucet to be TOP-LINE
TLL20-9100-SE1 Series in the following configuration:

____ TLL20-9100-SE1 3" Swivel Gooseneck Spout
____ TLL20-9101-SE1 8" Swivel Gooseneck Spout
____ TLL20-9102-SE1 6" Swivel Gooseneck Spout

Faucet body to be constructed of polished chrome plated brass. Valve to be quarter turn ceramic type. Handle to be lever style. Spout to be stainless steel swivel gooseneck style with leak proof double O-ring seal design. 2.2gpm aerator @ 60psi standard aerator. Single hole deck mount faucet accommodates installations up to 1" (25mm) thick. Faucet body incorporates a sealant recess or rubber gasket (included) to create watertight seal around faucet base. Mounting hardware included (1/2" NPS male inlet with compression seal and nut for standard lavatory risers).

Model No.	A	B	C
TLL20-9100-SE1	3-1/2" (89mm)	10-3/4" (273mm)	8-1/2" (216mm)
TLL20-9101-SE1	8-1/2" (216mm)	14-1/4" (362mm)	8-1/2" (216mm)
TLL20-9102-SE1	6" (152mm)	11-3/4" (297mm)	8-1/4" (209mm)

