

TOP-LINE®

1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME: _____

LOCATION: _____


SPECIFIER ITEM NO. _____ QTY: _____

TOP-LINE PART NO. _____

TOP-LINE® Low Lead Single Pantry Faucet
with Swing Spout and Lever Handle

TLL20-803x Series

TLL20-8030	6" spout
TLL20-8032	8" spout
TLL20-8033	10" spout
TLL20-8034	12" spout

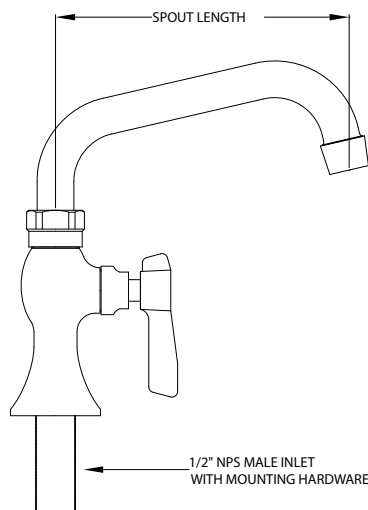

Dimensions shown in inches (mm) are for reference only
and are subject to change.

1/2" NPSM Male Inlet

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Approximate shipping weight - 2 lbs

Solid heavy duty low lead cast body is specification and commercial quality.

Commercial Quality Features

- Tubular swing spout design
- ADA-compliant lever handle
- Leak proof double O-ring spout design
- Stainless steel spout

SPECIFICATIONS:

Low Lead Single Pantry Faucet to be TOP-LINE TLL20 Series
in the following configuration:

_____	TLL20-8030	6" spout
_____	TLL20-8032	8" spout
_____	TLL20-8033	10" spout
_____	TLL20-8034	12" spout

Faucet body to be constructed of polished chrome plated brass with total
lead content less than 0.25% by weighted average. Handle to be lever.
Spout to be stainless steel tubular swing style with leak proof double O-ring
seal design. 2.2gpm aerator @ 60psi standard with full flow stream bubbler
screen spout tip.

Model No.	Spout Length
TLL20-8030	6" (152mm)
TLL20-8032	8" (203mm)
TLL20-8033	10" (254mm)
TLL20-8034	12" (305mm)

COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD
IN DRINKING WATER ACT" -
2011 - US SENATE BILL NO. S.3874
NSF/ANSI 61/9, ANNEX G

