

TOP-LINE®


1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

PROJECT NAME: _____
LOCATION: _____
SPECIFIER ITEM NO. _____ **QTY:** _____
ENCORE PART NO. _____

TOP-LINE® Wall Mount Faucet with Swivel Gooseneck Spout

TLL70-900xSE1 Series

TLL70-9000SE1 3" Spout, Compression Valve
TLL70-9001SE1 8" Spout, Compression Valve
TLL70-9002SE1 6" Spout, Compression Valve

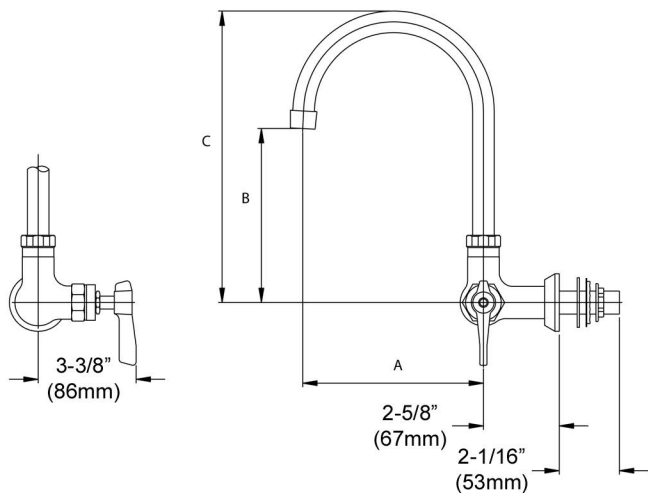

Dimensions shown in inches (mm) are for reference only
and are subject to change.

1-1/8" (29mm) hole for backsplash is recommended to
accommodate 1/2" supply nipple

1/2" NPSM Male Inlet

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Approximate shipping weight - 3 lbs.

Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Swivel gooseneck spout design
- Leak proof double O-ring spout design
- Stainless steel spout

SPECIFICATIONS:

Wall Mount Faucet to be TOP-LINE TLL70 Series in the following
configuration:

____ TLL70-9000SE1 3" Spout, Compression Valve
____ TLL70-9001SE1 8" Spout, Compression Valve
____ TLL70-9002SE1 6" Spout, Compression Valve

Faucet to be constructed of polished chrome plated brass with total
lead content less than 0.25% by weighted average. Spout to be
stainless steel swivel gooseneck style with leak proof double O-ring
seal design. Valves to be full turn compression style. Handle to be lever.
2.2gpm aerator @60psi standard with full flow stream bubbler screen spout tip.

Model No.	A	B	C
KL70-9000-SE1	3-1/2" (89mm)	6-3/8" (162mm)	8-3/8" (213mm)
KL70-9001-SE1	8-1/2" (216mm)	6-5/8" (168mm)	12-1/8" (308mm)
KL70-9002-SE1	6" (152mm)	8-3/8" (213mm)	11-13/16" (300mm)

COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD
IN DRINKING WATER ACT" –
2011 – US SENATE BILL NO. S.3874
NSF/ANSI 61/9, ANNEX G

