

# REACH-IN REFRIGERATOR

## Model: 1RESN

Natural Refrigerant R-290 Model

### 1-Section Extra-Wide Reach-In Refrigerator - Shallow Depth

- 1RESN** - Stainless steel front, aluminum end panels and interior
- 1RESNSA** - Stainless steel exterior, aluminum interior
- 1RESNSS** - Stainless steel exterior and interior



## Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Standard depth (consult factory)
Additional epoxy coated steel shelves	Special electrical req. (consult factory)
Chrome or stainless steel shelves	Hinged glass door (consult factory)
Adjustable legs	<b>Correctional Facility Options</b>
Custom laminates	<ul style="list-style-type: none"> <li>• One way security screws</li> </ul>
Half doors	<ul style="list-style-type: none"> <li>• Locking hasp (lock not included)</li> </ul>
Pass-Thru (consult factory)	<ul style="list-style-type: none"> <li>• Stainless steel mesh cover</li> </ul>
Heavy duty pilaster strips	<ul style="list-style-type: none"> <li>• Coverless hinges</li> </ul>
Wine Rack	

Consult factory for other model configurations, options and accessories.

**Continental**<sup>®</sup>  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

- Self contained, performance rated refrigeration system
- Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>
- Automatic, electric condensate evaporator
- Expansion valve system

### CABINET ARCHITECTURE

- 3" non-CFC polyurethane foam insulation
- Smooth, polished chrome workflow door handle
- Cam action, lift off hinges
- Self-closing door
- Magnetic snap in Santoprene™ door gasket
- Cylinder lock in door
- Heavy duty, epoxy coated steel shelves
- 5" casters

### MODEL FEATURES

- LED interior lighting
- Electronic controller with digital display & hi-low alarm
- Off-cycle defrost
- Rehinging of door (in the field)

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

# Model Specifications

## DIMENSIONAL DATA

Net Capacity (cubic feet)	18 (510 cu l)
Width, Overall (inches)	28 1/2 (724 mm)
Depth, Overall (inches) (including handle)	29 1/4 (743 mm)
Depth (inches) (less door)	25 7/8 (657 mm)
Depth (inches) (door open 90°)	49 1/2 (1257 mm)
Clear Door Width (inches)	21 7/8 (556 mm)
Clear Door Height (inches)	58 5/8 (1489 mm)
Height, Overall (inches) (including 5" casters)	82 1/4 (2089 mm)
Number of Doors	1
Number of Shelves	3
Shelf Area (square feet)	20.4 (1.9 sq m)

## REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/4+
Capacity (BTU per hour)*	1940

## ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	5.9 (3.9)
10 ft. Cord/Plug [attached] (International)	Yes (No)

## SHIPPING DATA



Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	31 5/8 (803 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	65 (1841 cu l)
Weight Std - Crated (pounds)	310 (141 kg)
Weight SS - Crated (pounds)	325 (147 kg)

\* Rating @ +25°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

# Model Plan Views

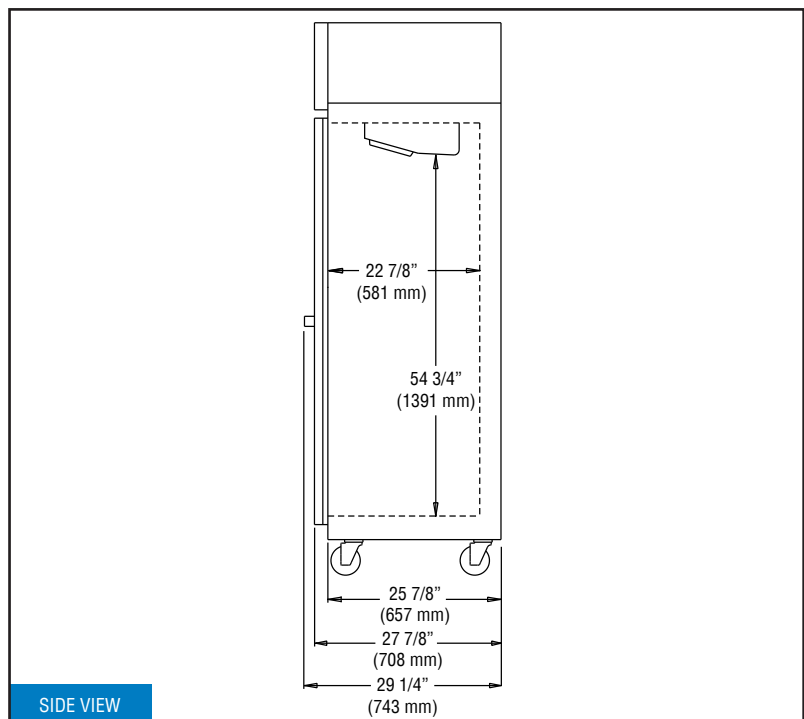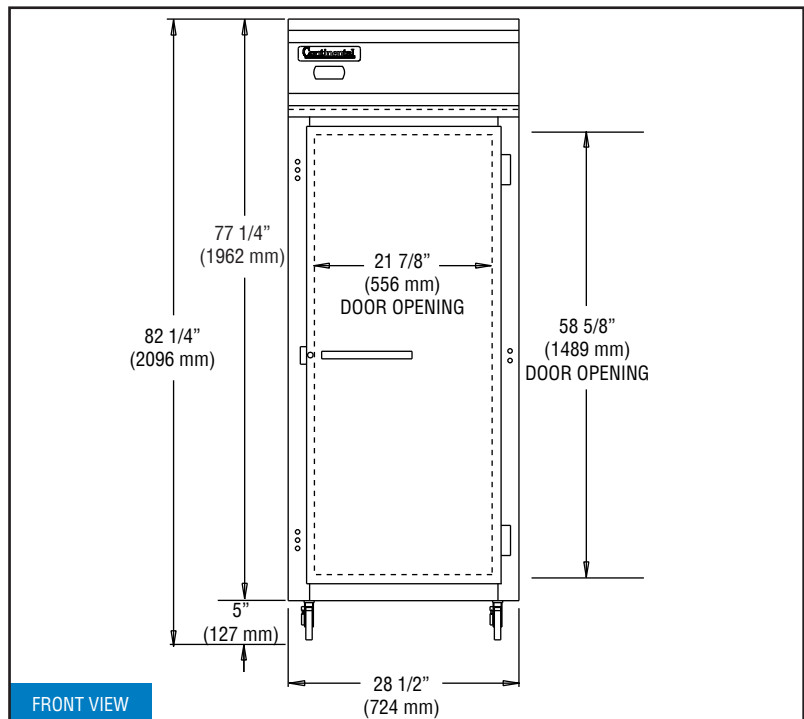

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.



Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

