DISPLAY REFRIGERATOR

Model: 1RXNGD

Natural Refrigerant R-290 Model

1-Section Extra-Wide Display Reach-In Refrigerator with Hinged Glass Door

1RXNGD - Stainless steel front, aluminum end panels and interior **1RXNSAGD** - Stainless steel exterior, aluminum interior **1RXNSSGD** - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel case back	Pan slide assemblies	
Additional epoxy coated steel shelves	Wine rack	
Chrome or stainless steel shelves	Adjustable legs	
Shallow depth (consult factory)	Solid door (consult factory)	
Rehinging of door (consult factory)	Special electrical req. (consult factory)	
Half doors	Pass-thru (consult factory)	

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated refrigeration system Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation Triple-pane, tempered hinged glass door Chrome plated handle Cam action, lift-off hinges Self-closing door Magnetic snap in door gasket Cylinder lock in door in door Heavy duty, epoxy coated steel shelves Heavy duty pilaster strips 5" casters

MODEL FEATURES

LED interior lighting Off cycle defrost Electronic controller with digital display & hi-low alarm

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	30 (850 cu l)
Width, Overall (inches)	36 ¼ (921 mm)
Depth, Overall (inches) (including handle)	35 ¾ (899 mm)
Depth (inches) (less door)	32 (813 mm)
Depth (inches) (door open 90°)	66 (1676 mm)
Clear Door Width (inches)	29 5⁄8 (752 mm)
Clear Door Height (inches)	58 5⁄8 (1489 mm)
Height, Overall (inches) (including 5" casters)	82 ¼ (2089 mm)
Number of Doors	1
Number of Shelves	4
Shelf Area (square feet)	24.4 (2.3 sq m)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU per hour)*	2560

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	7.6 (5.3)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	42 (1067 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	87 (2464 cu l)
Weight Std - Crated (pounds)	440 (200 kg)
Weight SS - Crated (pounds)	465 (211 kg)
* Dating @ . 05% augustates . 00% ampliant	

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Toll-Free: 800-523-7138 Phone: 215-244-1400

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Fax: 215-244-9579

udly Designed and




Equipped with one NEMA-5-15P Plug (varies by country)




Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc. Model Plan Views

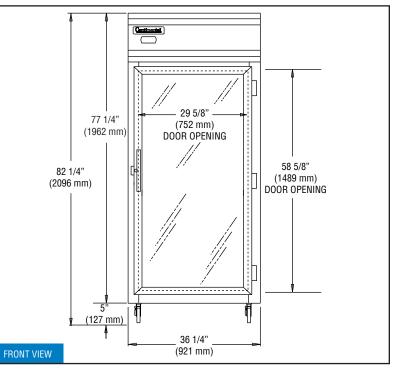

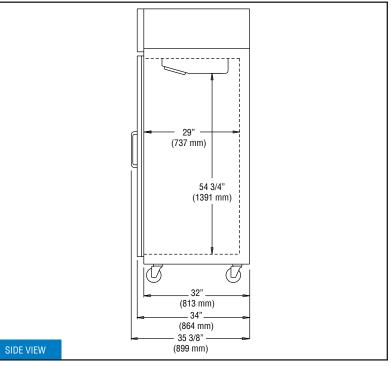

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.