PASS-THRU REFRIGERATOR

Model: 1RXNPT

Natural Refrigerant R-290 Model

1-Section Extra-Wide Pass-Thru Refrigerator

1RXNPT - Stainless steel front, aluminum end panels and interior

1RXNSAPT - Stainless steel exterior, aluminum interior

1RXNSSPT - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Additional epoxy coated steel shelves	Hinged glass door (consult factory)
Chrome or stainless steel shelves	Special electrical req. (consult factory)
Rehinging of doors (consult factory)	Correctional Facility Options
Half doors	One way security screws
Wine rack	Locking hasp (lock not included)
Adjustable legs	Stainless steel mesh cover
Custom laminates	Coverless hinges

Consult factory for other model configurations, options and accessories.

Project Name:		
Madaloadiial		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated "plug" refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handle

Cam action, lift off hinges

Self-closing door

Magnetic snap in Santoprene™ door gasket

Cylinder lock in door

Heavy duty, epoxy coated steel shelves

Heavy duty pilaster strips

5" casters

MODEL FEATURES

LED interior lighting

Electronic controller with digital display & hi-low alarm

Top and side air distribution ducts

Off-cycle defrost

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA Net Capacity (cubic feet) 30 (850 cu I) Width, Overall (inches) 36 1/4 (921 mm) Depth, Overall (inches) 38 3/4 (984 mm) (including handle) Depth (inches) (less door) 32 (813 mm) Depth (inches) (door open 90°) 100 (2540 mm) Clear Door Width (inches) 29 3/8 (752 mm) Clear Door Height (inches) 58 % (1489 mm) Height, Overall (inches) 82 1/4 (2089 mm) (including 5" casters) 2 Number of Doors 3 Number of Shelves

REFRIGERANT DATA

Shelf Area (square feet)

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU per hour)*	2560

24.4 (2.3 sq m)

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	6.4 (4.3)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	42 (1067 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	87 (2464 cu I)
Weight Std - Crated (pounds)	435 (197 kg)
Weight SS - Crated (pounds)	495 (225 kg)

^{*} Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









 $\@$ Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

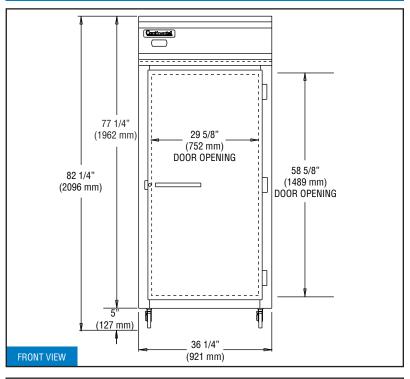

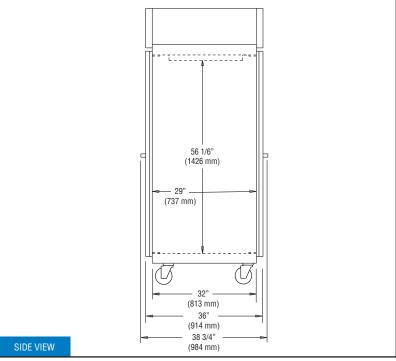

IMPORTANT NOTE: If the cabinet is located under a low ceiling, a <u>minimum</u> <u>clearance of 12" is required on top and 3" on sides.</u>