DUAL TEMP REFRIGERATOR/FREEZER

Model: 2RFEN

Natural Refrigerant R-290 Model

2-Section Extra-Wide Dual Temp Side-By-Side Reach-In Refrigerator/Freezer (0°F)

2RFEN - Stainless steel front, aluminum end panels and interior

2RFENSA - Stainless steel exterior, aluminum interior

2RFENSS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

(1) 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3		
Stainless steel case back	Shallow depth (consult factory)	
Additional epoxy coated steel shelves	Hinged glass doors	
Chrome or stainless steel shelves	Increased refrigeration systems (consult factory)	
Heavy duty pilaster strips	Special electrical req. (consult factory)	
Pan slide assemblies	Half doors	
Rehinging of doors (consult factory)	Correctional Facility Options	
Wine rack (refrigerator section)	One way security screws	
Adjustable legs	Locking hasp (lock not included)	
Custom laminates	Stainless steel mesh cover	
Pass-Thru (consult factory)	Coverless hinges	

Consult factory for other model configurations, options and accessories



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
model opecified.	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance rated refrigeration systems

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

Freezer section: standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

Electronic controllers with digital display & hi-low alarm

Off-cycle defrost (refrigerator section)

Automatic electric defrost (freezer section)

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	2½1 (595/595 cu I)
Width, Overall (inches)	57 (1448 mm)
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	58 (1473 mm)
Clear Door Width (inches)	21 7/8 (556 mm)
Clear Door Height (inches)	58 % (1489 mm)
Height, Overall (inches) including 5" casters)	82 ½ (2089 mm)
Number of Doors	2
Number of Shelves	6
Shelf Area (square feet) (per section)	20.4 (1.9 sq m)
Tray Slide Capacity (per section)	24
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/4, 1/2
Capacity (BTU per hour)*	1940 / 1590
ELECTRICAL DATA	
Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3/3
Total Amps (International)	5.9 (3.9) / 7.6 (4.2)
Defrost Amps (International)	3.7 (2.0)
10 ft. Cord/Plug [attach.] (International)	Yes (No)
SHIPPING DATA	
Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	64 (1626 mm)
Depth - Crated (inches)	42 (1067 mm)

- * Rating @ +25°F evaporator, 90°F ambient (refrigerator)

* Rating @ -15°F evaporator, 90°F ambient (freezer)
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Volume - Crated (cubic feet)

Weight Std - Crated (pounds)

Weight SS - Crated (pounds)

Equipped with two NEMA-5-15P Plugs (varies by country)

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

133 (3766 cu l)

620 (281 kg)

705 (320 kg)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

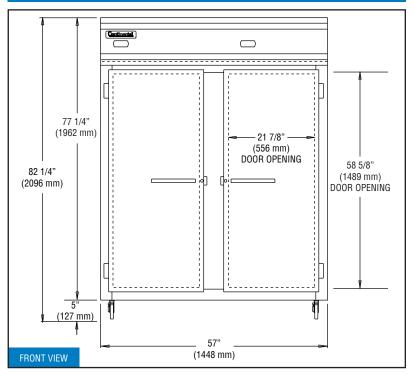

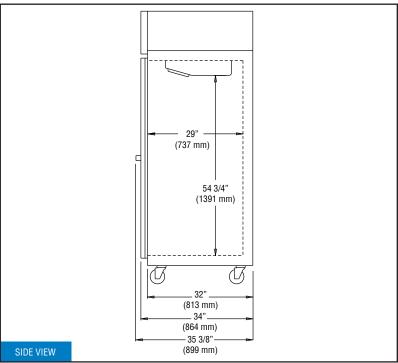

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.