DUAL TEMP REFRIGERATOR/FREEZER

Model: 3RRFNHD

Natural Refrigerant R-290 Model

3-Section Dual Temp Side-By-Side Reach-In Refrigerator/Freezer (0°F) with Half Doors

3RRFNHD - Stainless steel front, aluminum end panels and interior **3RRFNSAHD** - Stainless steel exterior, aluminum interior **3RRFNSSHD** - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

(upcharge and lead times may apply)		
Stainless steel case back	Hinged glass doors	
Additional epoxy coated steel shelves	Increased refrigeration systems (consult factory)	
Chrome or stainless steel shelves	Special electrical req. (consult factory)	
Heavy duty pilaster strips	Full doors	
Pan slide assemblies	Correctional Facility Options	
Rehinging of doors (consult factory)	One way security screws	
Wine rack (refrigerator section)	Locking hasp (lock not included)	
Adjustable legs	Stainless steel mesh cover	
Custom laminates	Coverless hinges	
Pass-Thru (consult factory)		

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:		
Model Specified:		
mouer opcomed.		
Location:		
Item No:	Quantity:	
itelli No.	quantity.	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance rated refrigeration systems

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

Freezer section: standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

Electronic controllers with digital display & hi-low alarm

Off-cycle defrost (refrigerator section)

Automatic electric defrost (freezer section)

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	48/20 (1359/566 cu I)
Width, Overall (inches)	78 (1981 mm)
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	55 ½ (1410 mm)
Clear Door Width (inches)	19 3/8 (492 mm)
Clear Half Door Height (inches)	27 ½ (699 mm)
Height, Overall (inches) (including 5" casters)	82 ½ (2089 mm)
Number of Doors	6
Number of Shelves	9
Shelf Area (square feet) (per section)	20.4 (1.9 sq m)
Tray Slide Capacity (per half section)	11
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/3+, 1/2
Capacity (BTU per hour)*	2560 / 1590

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3/3
Total Amps (International)	8.1 (4.9) / 7.6 (4.2)
Defrost Amps (International)	3.7 (2.0)
(2) 10 ft. Cord/Plug [attach.] (International)	Yes (No)

SHIPPING DATA

• • • • • • • • • • • • • • • • • • • •	
Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	90 (2286 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	187 (5295 cu I)
Weight Std - Crated (pounds)	835 (379 kg)
Weight SS - Crated (pounds)	935 (424 kg)

^{*} Rating @ +25°F evaporator, 90°F ambient (refrigerator)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Fauinned with two NEMA-5

Equipped with two NEMA-5-15P Plugs (varies by country)

Continental® Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

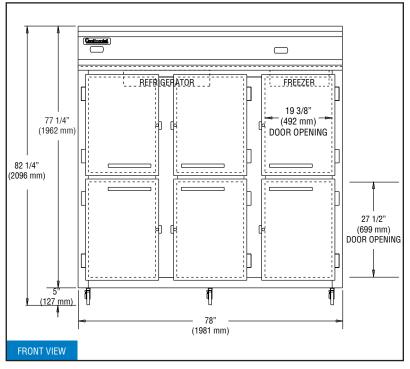

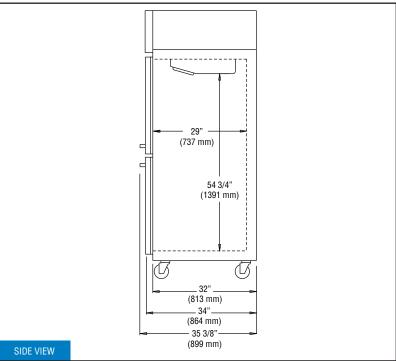

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.

^{*} Rating @ -15°F evaporator, 90°F ambient (freezer)