PIZZA PREPARATION TABLE

Model: CPA118+

118" Pizza Preparation Refrigerator with Solid Doors

Heavy gauge #300 series stainless steel top, stainless steel front and end panels, aluminum interior.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel interior	Wire rod garnish rack	
Stainless steel back	Vision panel lids	
Additional epoxy coated steel shelves	Door locks	
Stainless steel shelves	Adjustable legs	
Condensing unit on left (standard on right)	Front breathing	
Pan slides	Special electrical requirements (consult factory)	

Drawer in lieu of door section above the condensing unit*

Drawers in lieu of doors (consult factory)**

Consult factory for other model configurations, options and accessories

^{**}Two tier: (2) 12x20x6 pans per drawer



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Loodion.	
Item No:	Quantity:

Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA#:

Performance rated refrigeration system

Environmentally safe R-450A refrigerant

Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold

Automatic, electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, slide out condensing unit

Expansion valve system

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handles

Spring loaded, self closing doors

Magnetic snap in Santoprene™ door gaskets

Heavy duty, epoxy coated steel shelves

19" deep, full length nylon cutting board

Insulated lids (with heavy duty hinge pins)

(14) pan top divider bars*

5" casters

* Pans supplied by others

MODEL FEATURES

Reversing condenser fan1

Knob-type electronic controller mounted in control box

Ergonomically-friendly raised angle rail

Electronic control, off-cycle defrost

Refrigerated section with door above the condensing unit

Field rehingeable doors

¹ Fan runs in reverse for short period on startup to blow away any debris.

NOTE: Models come standard with a door above the condensing unit. A drawer above the condensing unit is an option.

APPROVAL:

^{*}Drawer section above condensing unit holds (1) 12 x 20 x 6 pan.

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	44 (1246 cu I)
Width, Overall (inches)	118 (2997 mm)
Depth, Overall (inches) (including cutting board & bumpers)	36 % (937 mm)
Height, Overall (inches) (including 5" casters)	39 ½16 (1002 mm)
Depth, Cutting Board (inches)	19 (483 mm)
Shelf Area (square feet)	18.4 (1.7 sq m)
Number of Shelves	4
Number of Full Doors	4
Number of Half Doors	1
Interior Depth (inches)	27 3/8 (695 mm)
Interior Height (inches)	26 (660 mm)
Interior Height (inches) (above condenser)	12 ½ (318 mm)
Interior Width (inches)	114 (2896 mm)
PAN TOP	
Divider Bars (supplied with model)	(14) CM1-0111
Pan Capacity (pans supplied by others)	(16) 1/3
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/2
Capacity (BTU per hour)*	5600
* Rating @ +25°F evaporator, 90°F ambient ELECTRICAL DATA	
Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	13.9 (9.1)
10 ft. Cord/Plug [attached] (International)	Yes (No)
SHIPPING DATA	
Weight (pounds)	882 (400 kg)
Height - Crated (inches)	43 ¾ (1111 mm)
Width - Crated (inches)	120 (3048 mm)
Depth - Crated (inches)	47 (1194 mm)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-20P Plug (varies by country)

Continental® Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

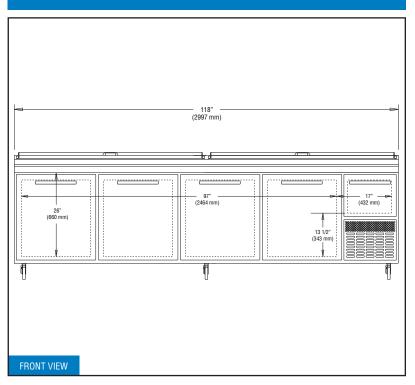

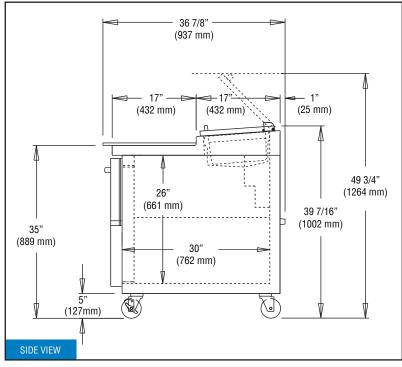

IMPORTANT NOTE: If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required on sides, front and rear.</u>