# **BASE MODEL SANDWICH UNIT**

## Model: RA93N12M

Natural Refrigerant R-290 Model

# 93" Mighty Top Sandwich Unit Refrigerator with Solid Doors - 12 Pans

Heavy gauge #300 series stainless steel top, stainless steel front and end panels, galvanized steel rear and grills and aluminum interior.



## **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel interior	Composite cutting board
Stainless steel back	Rear mounted cutting board
Overshelves (single or double)	Condensing unit left (standard on right)
Additional epoxy coated steel shelves	Flat insulated night cover
Stainless steel shelves	Door locks
Pan slides	Adjustable legs
Vision panel lid	Front breathing

Drawer in lieu of door section above the condensing unit\*

Drawers in lieu of doors (consult factory) \*\*

Consult factory for other model configurations, options and accessories.

<sup>\*\*</sup>Two tier (larger section): (2) 12x20x6 pans per drawer



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project N	ame:
-----------	------

**Model Specified:** 

Location:

Item No: Quantity:

AIA #: SIS #:

### **Standard Model Features**

#### REFRIGERATION SYSTEM

Performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, slide out condensing unit

Expansion valve system

#### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handles

Spring loaded, self closing doors

Magnetic snap in Santoprene™ door gaskets

Heavy duty, epoxy coated steel shelves

10" deep, full length nylon cutting board

Insulated lid

5" casters

#### **MODEL FEATURES**

Refrigerated section with door above the condensing unit

(12) 1/6 size recessed pans, 4" deep

Electronic control, off-cycle defrost

Field rehingeable doors

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

**NOTE:** Models come standard with a door above the condensing unit. A drawer above the condensing unit is an option.

APPROVAL:

<sup>\*</sup>Drawer section above condensing unit holds (1)  $12 \times 20 \times 6$  pan.

# **Model Specifications**

# DIMENSIONAL DATA Net Capacity (cubic feet) 32 (906 cu l) ½ Size Pans (4" deep) 12

Width, Overall (inches) 93 (2362 mm)

Depth, Overall (inches) (including handles & bumpers) 37 (940 mm)

Depth, Cutting Board (inches) 10 (254 mm)

Height, Overall (inches) (including 5" casters) 42 (1067 mm)

Shelf Area (square feet) 14.2 (1.3 sq m)

Number of Shelves 6

Number of Full Doors 3

Number of Half Doors 1
Interior Depth (inches) 30 (762 mm)

Interior Height (inches) 26 (660 mm)

Interior Height (inches) 26 (660 mm)

12 ½ (318 mm)

Interior Width (inches) 89 (2261 mm)

#### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU per hour)*	2600

#### **ELECTRICAL DATA**

Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	5.8 (3.9)
10 ft. Cord/Plug [attached] (International)	Yes (No)


#### **SHIPPING DATA**


Weight (pounds)	605 (274 kg)
Height - Crated (inches)	43 ¾ (1111 mm)
Width - Crated (inches)	95 (2413 mm)
Depth - Crated (inches)	47 (1194 mm)


\* Rating @ +25°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Equipped with one NEMA-5-15P Plug (varies by country)

## **Model Plan Views**

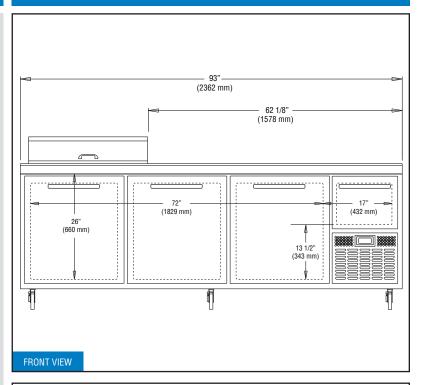

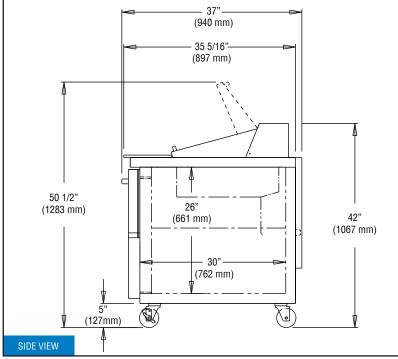

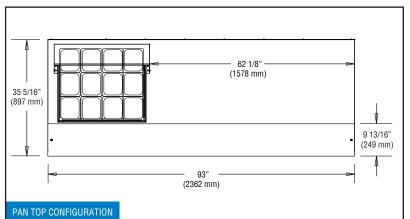



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.