DESIGNER LINE REFRIGERATOR

Model: D1RENPTHD

Natural Refrigerant R-290 Model



1-Section Extra-Wide Pass-Thru Refrigerator with Half Doors



ENERGY STAR® Qualified Commercial Refrigerator

D1RENPTHD - Stainless steel front, aluminum end panels and interior **D1RENSAPTHD** - Stainless steel exterior, aluminum interior

D1RENSSPTHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Casters	
Additional epoxy coated steel shelves	Pan slide assemblies	
Chrome or stainless steel shelves	Custom laminates	
Pass-thru (consult factory)	Special electrical req. (consult factory)	
Full door	Correctional Facility Options	
Hinged glass door (consult factory)	One way security screws	
Rehinging of doors (consult factory)	Locking hasp (lock not included)	
Wine rack	Stainless steel mesh cover	
	Coverless hinges	

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:		
Model Specified:		
Model Specified.		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated "plug" refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty pilaster strips

Heavy duty, epoxy coated steel shelves

Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting

Electronic controller with digital display & hi-low alarm

Off-cycle defrost

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	22 (623 cu l)
Width, Overall (inches)	28 ½ (724 mm)
Depth, Overall (inches) (including handles)	38 ¾ (984 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	79 (2007 mm)
Clear Door Width (inches)	21 1/8 (556 mm)
Clear Half Door Height (inches)	27 ½ (699 mm)
Height, Overall (inches) (including 6" legs)	83 ½ (2115 mm)
Number of Doors	4
Number of Shelves	3
Shelf Area (square feet)	20.4 (1.9 sq m)
Tray Slide Capacity (per half section)	11

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/4
Capacity (BTU per hour)*	1940

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	5.5 (3.9)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	31 % (803 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	65 (1841 cu I)
Weight Std - Crated (pounds)	370 (168 kg)
Weight SS - Crated (pounds)	390 (177 kg)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)

Continental® Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

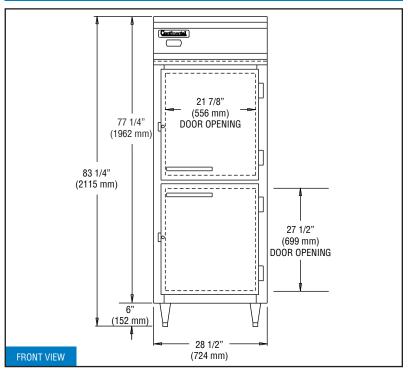

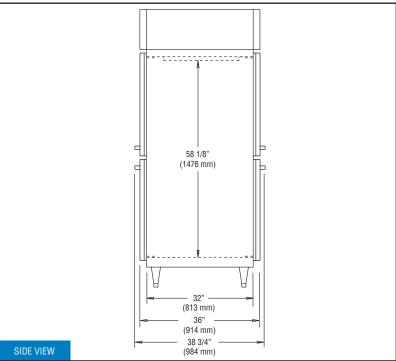

IMPORTANT NOTE: If the cabinet is located under a low ceiling, a <u>minimum</u> <u>clearance of 12" is required on top and 3" on sides.</u>