

# DESIGNER LINE ROLL-THRU FREEZER (0°F)

**Model: DL1FI-RT**



## 1-Section Roll-Thru Freezer with 66 1/4" Cart Capacity

- DL1FI-RT** - Stainless steel front, aluminum end panels and interior
- DL1FI-SA-RT** - Stainless steel exterior, aluminum interior
- DL1FI-SS-RT** - Stainless steel exterior and interior



### Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Increased refrigeration systems
Epoxy-coated steel shelves	Special electrical req. (consult factory)
Chrome or stainless steel shelves	<b>Correctional Facility Options</b>
Rehinging of doors (consult factory)	<ul style="list-style-type: none"> <li>• One way security screws</li> </ul>
Expansion valve system	<ul style="list-style-type: none"> <li>• Locking hasp (lock not included)</li> </ul>
Custom laminates	<ul style="list-style-type: none"> <li>• Stainless steel mesh cover</li> </ul>
Half doors	<ul style="list-style-type: none"> <li>• Coverless hinges</li> </ul>

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

### Standard Model Features

#### REFRIGERATION SYSTEM

- Self contained, performance-rated "plug" refrigeration system
- Environmentally-safe R-404A refrigerant
- Refrigeration system is accessible on top of cabinet, separate from the "food zone"
- Top and side air distribution ducts
- Automatic, hot gas condensate evaporator

#### CABINET ARCHITECTURE

- 3" non-CFC polyurethane foam insulation
- Smooth, polished chrome workflow door handles
- Cam action, lift off hinges
- Magnetic snap-in door gaskets
- Cylinder lock in each door
- Self-closing doors
- 66 1/2" high door openings (66 1/4"H rack capacity\*)

#### MODEL FEATURES

- Electronic controller w/digital display & hi-low alarm
- Removable stainless steel rack guides
- Removable stainless steel ramps
- Reinforced stainless steel floor
- Automatic electric defrost

\* Rack not supplied

**IMPORTANT NOTE:** Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at installation site where space limitations are confining.



Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
www.continentalrefrigerator.com

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

Net Capacity (cu. ft.)	32 (906 cu l)
Width, Overall (in.)	35 1/4 (895 mm)
Depth, Overall (in.) (incl. handles)	38 3/4 (984 mm)
Depth (in.) (less doors)	32 (813 mm)
Depth (in.) (doors open 90°)	98 (2489 mm)
Clear Door Width (in.)	27 3/8 (695 mm)
Clear Full Door Height (in.)	66 1/2 (1676 mm)
Height, Overall (in.)	86 (2184 mm)
No. of Doors	2
Rack Capacity**	1

### REFRIGERANT DATA

Condensing Unit Size (H.P.)	3/4
Capacity (BTU/Hr)*	3530

\* Rating @ -15°F evaporator, 90°F ambient

### ELECTRICAL DATA



Voltage (int'l)	115/208-230/60/1 (220/50/1)
Feed Wires (incl. ground)	4
Total Amps (int'l)	11.4 (10.5)
Defrost Amps (int'l)	9.6 (4.8)
10 ft. Cord/Plug (int'l)	No (No)

### SHIPPING DATA

Height - Crated (in.)	94 (2288 mm)
Width - Crated (in.)	43 (1092 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	94 (2661 cu l)
Weight Std - Crated (lbs.)	547 (248 kg)
Weight SS - Crated (lbs.)	690 (313 kg)

\*\* Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

## Model Plan Views

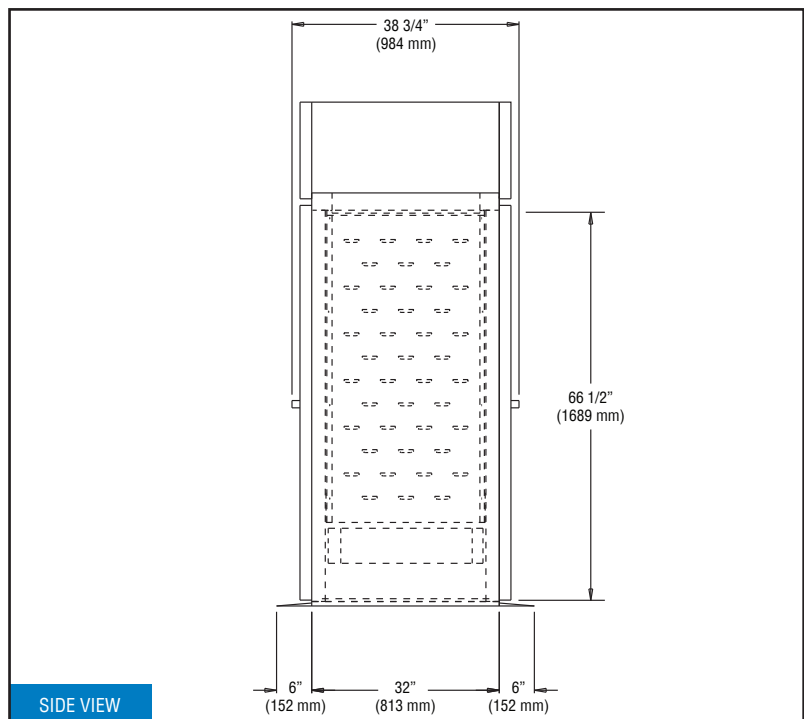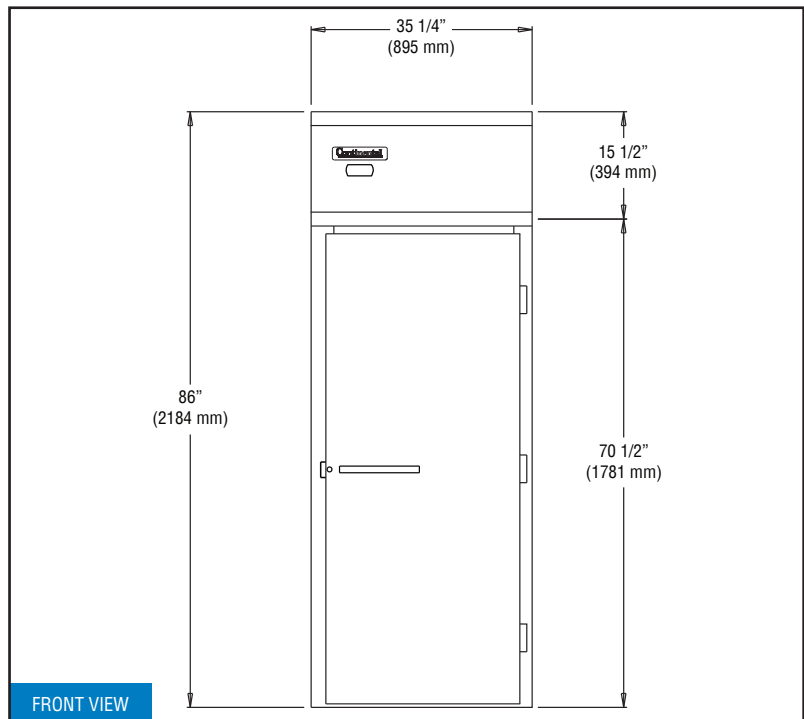

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunkserry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



MADE IN THE U.S.A.

© Copyright 2020. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.