DESIGNER LINE ROLL-IN FREEZER (0°F)

Model: DL2FI



2-Section Roll-In Freezer with 661/4" Cart Capacity

DL2FI - Stainless steel front, aluminum end panels and interior

DL2FI-SA - Stainless steel exterior, aluminum interior

DL2FI-SS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Special electrical req. (consult factory)
Epoxy-coated steel shelves	Increased refrigeration systems
Chrome or stainless steel shelves	Correctional Facility Options
Rehinging of doors (consult factory)	One way security screws
Expansion valve system	Locking hasp (lock not included)
Custom laminates	Stainless steel mesh cover
Half doors	Coverless hinges

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Leader	
Location:	
Item No:	Quantity:
item no.	quantity.
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance-rated "plug" refrigeration system

Environmentally-safe R-404A refrigerant

Refrigeration system is accessible on top of cabinet, separate from the "food zone"

Top and side air distribution ducts

Automatic, hot gas condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Magnetic snap-in door gaskets

Cylinder lock in each door

Self-closing doors

66 1/2" high door openings (66 1/4"H rack capacity*)

MODEL FEATURES

LED interior lighting

Electronic controller w/digital display & hi-low alarm

Removable stainless steel rack guides

Removable stainless steel ramps

Reinforced stainless steel floor

Automatic electric defrost

* Rack not supplied

IMPORTANT NOTE: Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at installation site where space limitations are confining.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	64 (1812 cu I)
Width, Overall (in.)	68 1/2 (1740 mm)
Depth, Overall (in.) (incl. handles)	35 3/8 (899 mm)
Depth (in.) (less doors)	32 (813 mm)
Depth (in.) (doors open 90°)	65 (1651 mm)
Clear Door Width (in.)	27 3/8 (695 mm)
Clear Full Door Height (in.)	66 1/2 (1676 mm)
Height, Overall (in.)	86 (2184 mm)
No. of Door(s)	2
Rack Capacity**	2

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1
Capacity (BTU/Hr)*	4150

^{*} Rating @ -15°F evaporator, 90°F ambient

ELECTRICAL DATA


Voltage (int'l)	115/208-230/60/1 (220/50/1)
Feed Wires (incl. ground)	4
Total Amps (int'l)	13.5 (10.8)
Defrost Amps (int'l)	9.6 (4.8)
10 ft. Cord/Plug (int'l)	No (No)


SHIPPING DATA

Height - Crated (in.)	94 (2288 mm)
Width - Crated (in.)	77 (1956 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	168 (4757 cu I)
Weight Std - Crated (lbs.)	750 (340 kg)
Weight SS - Crated (lbs.)	910 (413 kg)

^{**} Maximum rack size including wheels - $27''W \times 29''D \times 66 \text{ 1/4}''H$ Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

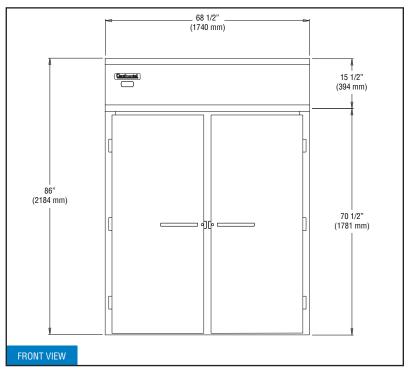

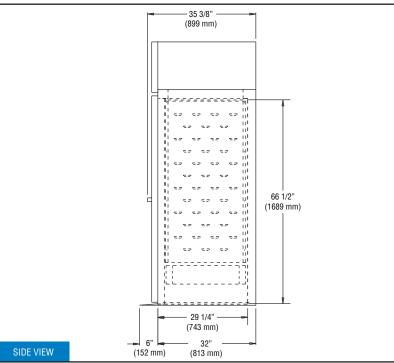

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







© Copyright 2020. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.