DESIGNER LINE REFRIGERATOR/FREEZER

Model: D2RFESN Natural Refrigerant R-290 Model

Natural Refrigerant R-290 Model

2-Section Dual Temp Extra-Wide Reach-In Refrigerator/Freezer (0°F) -Shallow Depth

D2RFESN - Stainless steel front, aluminum end panels and interior D2RFESNSA - Stainless steel exterior, aluminum interior D2FESNSS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel case back	Custom laminates	
Additional epoxy coated steel shelves	Special electrical req. (consult factory)	
Chrome or stainless steel shelves	Correctional Facility Options	
Rehinging of doors (consult factory)	One way security screws	
Pan slide assemblies	• Locking hasp (lock not included)	
Wine rack (refrigerator section)	Stainless steel mesh cover	
Casters	Coverless hinges	

Consult factory for other model configurations, options and accessories.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance rated refrigeration systems (coil housing in cabinet zones) Natural, environmentally safe,

high efficiency R-290 refrigerant¹

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation Smooth, polished chrome workflow door handles Cam action, lift off hinges Self-closing doors Magnetic snap in Santoprene™ door gaskets Cylinder lock in each door Heavy duty, epoxy coated steel shelves Heavy duty pilaster strips Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting Electronic controllers with digital display & hi-low alarm Off-cycle defrost (refrigerator section) Automatic electric defrost (freezer section)

¹ R-290 refrigerant meets all federal and state regulatory requirements.


APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	18/18 (510/510 cu l)
Width, Overall (inches)	57 (1448 mm)
Depth, Overall (inches) (including handles)	29 ¼ (743 mm)
Depth (inches) (less doors)	25 7⁄8 (657 mm)
Depth (inches) (doors open 90°)	51 ¼ (1299 mm)
Clear Door Width (inches)	21 7⁄8 (556 mm)
Clear Door Height (inches)	58 5⁄8 (1489 mm)
Height, Overall (inches) (including 6" legs)	83 ¼ (2115 mm)
Number of Doors	2
Number of Shelves	6
Shelf Area (square feet) (per section)	20.4 (1.9 sq m)
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/4, 1/2
Capacity (BTU per hour)*	1940, 1590
ELECTRICAL DATA	
Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3/3
Total Amps (International)	5.9 (3.9), 7.6 (4.2)
Defrost Amps (International)	4.2 (4.2)
(2) 10 ft. Cord/Plug [attach.] (International)	Yes (No)
SHIPPING DATA	(/
Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	64 (1626 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cu. ft.)	133 (3766 cu l)
Weight Std - Crated (pounds)	620 (281 kg)
Weight SS - Crated (pounds)	705 (320 kg)
* Rating @ +25°F evaporator, 90°F ambient (re	,

* Rating @ +25°F evaporator, 90°F ambient (refrigerator) * Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Due to our continued efforts in developing innovative products, specifications subject to change without notice.



Proudly Designed and Assembled in the USA


Toll-Free: 800-523-7138 Phone: 215-244-1400


539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Fax: 215-244-9579



Model Plan Views

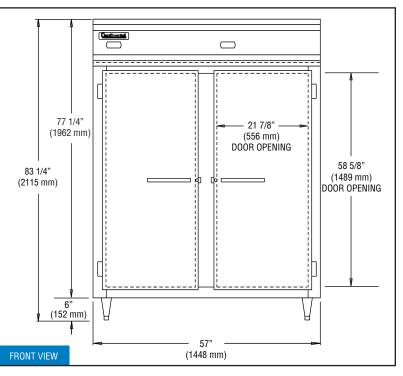

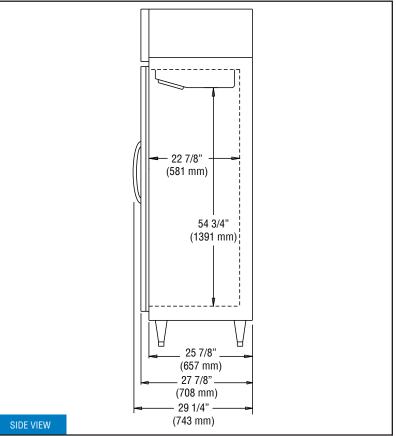

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.