DESIGNER LINE ROLL-THRU REFRIGERATOR

Model: D2RINRT-E

Natural Refrigerant R-290 Model



2-Section Extra-High Roll-Thru Refrigerator with 72" Cart Capacity

D2RINRT-E - Stainless steel front, aluminum end panels and interior

D2RINSART-E - Stainless steel exterior, aluminum interior

D2RINSSRT-E - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Epoxy coated steel shelves	Special electrical req. (consult factory)	
Chrome or stainless steel shelves	Correctional Facility Options	
Rehinging of doors (consult factory)	One way security screws	
Custom laminates	Locking hasp (lock not included)	
Half doors	Stainless steel mesh cover	
Roll-In (consult factory)	Coverless hinges	

Consult factory for other model configurations, options and accessories

Project Name:	
Model Specified:	
Location:	
Item No:	Quantitus
itelli No.	Quantity:
AIA #:	SIS #:
AIA #.	010 11.

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated "plug" refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handle

Cam action, lift off hinges

Magnetic snap in Santoprene™ door gasket

Cylinder lock in door

Self-closing door

72 1/2" high door opening (72"H rack capacity*)

MODEL FEATURES

Electronic controller with digital display & hi-low alarm

LED interior lighting

Top and side air distribution ducts

Off-cycle defrost

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

Removable stainless steel rack guides

Removable stainless steel ramp

Reinforced stainless steel floor

* Rack not supplied

IMPORTANT NOTE: ¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA Net Capacity (cubic feet) 68 (1926 cu I) Width, Overall (inches) 68 ½ (1740 mm) Depth, Overall (inches) 38 3/4 (984 mm) (including handles) Depth (inches) (less doors) 32 (813 mm) Depth (inches) (doors open 90°) 98 (2489 mm) Clear Door Width (inches) 27 3/8 (695 mm) Clear Full Door Height (inches) 72 ½ (1842 mm) Height, Overall (inches) 92 (2337 mm) 2 Number of Door(s) Rack Capacity** 2

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/2+
Capacity (BTU per hour)*	4010

^{*} Rating @ +25°F evaporator, 90°F ambient

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	10.3 (4.9)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Height - Crated (inches)	97 (2464 mm)
Width - Crated (inches)	77 (1956 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	176 (4984 cu I)
Weight Std - Crated (pounds)	840 (381 kg)
Weight SS - Crated (pounds)	1023 (464 kg)

^{*} Rating @ +25°F evaporator, 90°F ambient

^{**} Maximum rack size including wheels - 27"W x 29"D x 72"H
Figures in parentheses reflect metric equivalents rounded to the nearest
whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

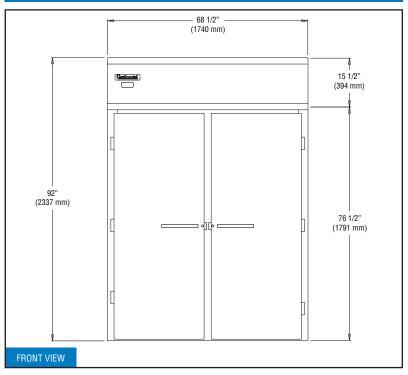

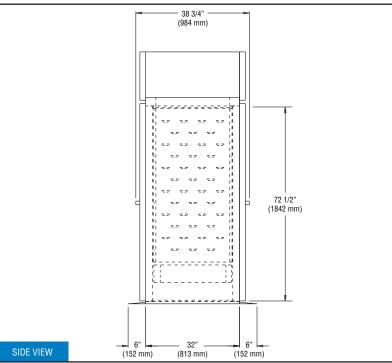

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides.