

# DESIGNER LINE REFRIGERATOR/WARMER

**Model: DL2RWE-PT-HD**



## 2-Section Extra-Wide Dual Temp, Pass-Thru Refrigerator/Warmer with Half Doors

Refrigerator (left)/Warmer (right). Sections can be changed at time of order.

- DL2RWE-PT-HD** - Stainless steel front, aluminum end panels and interior
- DL2RWE-SA-PT-HD** - Stainless steel exterior, aluminum interior
- DL2RWE-SS-PT-HD** - Stainless steel exterior and interior



## Options and Accessories

(upcharge and lead times may apply)

|                                      |  |
|--------------------------------------|--|
| Chrome or stainless steel shelves    | Special electrical req. (consult factory)  |
| Rehinging of doors (consult factory) | <b>Refrigerator Section Only</b>   |
| Expansion valve system               | Additional epoxy coated steel shelves  |
| Pan slide assemblies                 | Wine Rack  |
| Casters                              | <b>Correctional Facility Options</b>   |
| Custom laminates                     | <ul style="list-style-type: none"> <li>• One way security screws</li> </ul>          |
| Full doors                           | <ul style="list-style-type: none"> <li>• Locking hasp (lock not included)</li> </ul> |
| Hinged glass doors (consult factory) | <ul style="list-style-type: none"> <li>• Stainless steel mesh cover</li> </ul>       |
| Increased refrigeration systems      | <ul style="list-style-type: none"> <li>• Coverless hinges</li> </ul>                 |

Consult factory for other model configurations, options and accessories.



**Toll-Free: 800-523-7138**  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

**Project Name:**

**Model Specified:**

**Location:**

**Item No:**

**Quantity:**

**AIA #:**

**SIS #:**

## Standard Model Features

### REFRIGERATOR SECTION

Separate, self-contained, performance rated "plug" refrigeration system

Environmentally safe R-134a refrigerant

(3) heavy duty, epoxy coated steel shelves

### WARMER SECTION

Separate, self-contained, performance rated heating system

90°F to 180°F temperature range

Top mounted heating plenum "plug" with circulating fan

Stainless steel strip heaters located in base of interior

(3) Heavy duty, chrome plated steel shelves

### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty pilaster strips

Adjustable 6" stainless steel legs

### MODEL FEATURES

Unique air flow distribution ducts

Automatic interior lighting

(2) Electronic controllers with digital display & hi-low alarm

Automatic, hot gas condensate evaporator

Refrigeration/heating system is readily accessible on top of cabinet, separate from the "food zone"

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled on job site

**APPROVAL:**

# Model Specifications

## DIMENSIONAL DATA [R/W]

|   |                       |
|---|-----------------------|
| Net Capacity (cubic feet)                       | 22/22 (623/623 cu l)  |
| Width, Overall (inches)                         | 57 (1448 mm)          |
| Depth, Overall (inches)<br>(including handles)  | 38 3/4 (984 mm)       |
| Depth (inches) (less doors)                     | 32 (813 mm)           |
| Depth (inches) (doors open 90°)                 | 84 (2134 mm)          |
| Clear Door Width (inches)                       | 21 7/8 (556 mm)       |
| Clear Half Door Height (inches)                 | 27 1/2 (699 mm)       |
| Height, Overall (inches)<br>(including 6" legs) | 83 1/4 (2115 mm)      |
| Number of Doors                                 | 8                     |
| Number of Shelves                               | 6                     |
| Shelf Area (square feet)                        | 40.8 (3.8 sq m)       |
| Tray Slide Capacity (refrigerator)              | 11 (per half section) |
| Tray Slide Capacity (warmer)                    | 9 (top) 6 (bottom)    |

## REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/4  |
| Capacity (BTU per hour)*    | 1940 |

## ELECTRICAL DATA [R/W]

|                                  |                     |
|----------------------------------|---------------------|
| Voltage [R] (International)      | 115/60/1 (220/50/1) |
| Voltage [W]                      | 208-230/60/1        |
| Feed Wires (including ground)    | 3/3                 |
| Total Amps (International)       | 5.5 (3.5)/7.2 (7.2) |
| Total Wattage @ 208-230 volts    | 2250                |
| 10 ft. Cord/Plug (International) | Yes (No)/No         |

## SHIPPING DATA



|                              |                  |
|------------------------------|------------------|
| Height - Crated (inches)     | 85 1/2 (2172 mm) |
| Width - Crated (inches)      | 64 (1626 mm)     |
| Depth - Crated (inches)      | 42 (1067 mm)     |
| Volume - Crated (cubic feet) | 133 (3766 cu l)  |
| Weight Std - Crated (pounds) | 595 (270 kg)     |
| Weight SS - Crated (pounds)  | 625 (283 kg)     |

\* Rating @ +25°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

**Refrigerator Section Only:**  
Equipped with one NEMA-5-15P Plug (varies by country)



# Model Plan Views

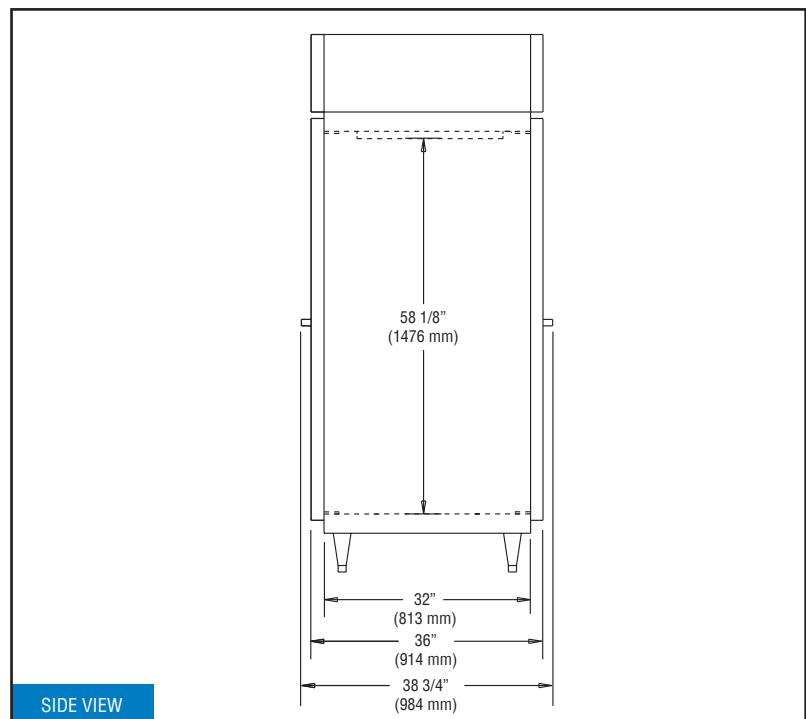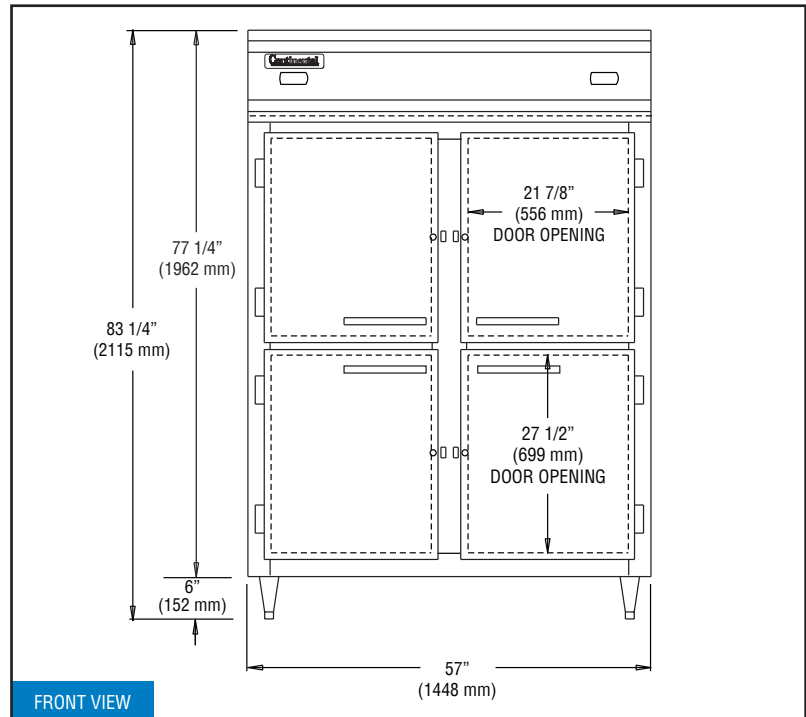

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

