

DESIGNER LINE WARMER

Model: DL2WE-HD

Designer Line

2-Section Extra-Wide Reach-In Warmer with Half Doors

DL2WE-HD - Stainless steel front, aluminum end panels and interior
DL2WE-SA-HD - Stainless steel exterior, aluminum interior
DL2WE-SS-HD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Pass-Thru (consult factory)
Additional chrome plated steel shelves	Rehinging of doors (consult factory)
Stainless steel shelves	Special electrical req. (consult factory)
Pan slide assemblies	Correctional Facility Options
Casters	<ul style="list-style-type: none">One way security screws
Custom laminates	<ul style="list-style-type: none">Locking hasp (lock not included)
Full door	<ul style="list-style-type: none">Stainless steel mesh cover
Hinged glass doors (consult factory)	<ul style="list-style-type: none">Coverless hinges

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

HEATING SYSTEM

Self contained, performance rated heating system
90°F to 180°F temperature range
Top mounted heating plenum "plug" with circulating fan
Unique air flow distribution ducts

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
Smooth, polished chrome workflow door handles
Cam action, lift off hinges
Self-closing doors
Magnetic snap in Santoprene™ door gaskets
Cylinder lock in each door
Heavy duty, chrome plated steel shelves
Heavy duty pilaster strips
Adjustable 6" stainless steel legs

MODEL FEATURES

Automatic interior lighting
Electronic controller with digital display & hi-low alarm
Stainless steel strip heaters located in base of interior

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	52 (1472 cu l)
Width, Overall (inches)	57 (1448 mm)
Depth, Overall (inches) (including handles)	35 ³ / ₈ (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	58 (1473 mm)
Clear Door Width (inches)	21 ⁷ / ₈ (556 mm)
Clear Half Door Height (inches)	27 ¹ / ₂ (699 mm)
Height, Overall (inches) (including 6" legs)	83 ¹ / ₄ (2115 mm)
Number of Doors	4
Number of Shelves	6
Shelf Area (square feet)	44.5 (4.1 sq m)
Tray Slide Capacity (per top sections)	9
Tray Slide Capacity (per bottom sections)	6

ELECTRICAL DATA



Voltage	208-230/60/1
Feed Wires (including ground)	3
Total Amps (International)	10.6 (10.6)
Total Wattage @ 208-230 volts	2250
10 ft. Cord/Plug (International)	No (No)

SHIPPING DATA

Height - Crated (inches)	85 ¹ / ₂ (2172 mm)
Width - Crated (inches)	64 (1626 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	133 (3766 cu l)
Weight Std - Crated (pounds)	510 (196 kg)
Weight SS - Crated (pounds)	535 (243 kg)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

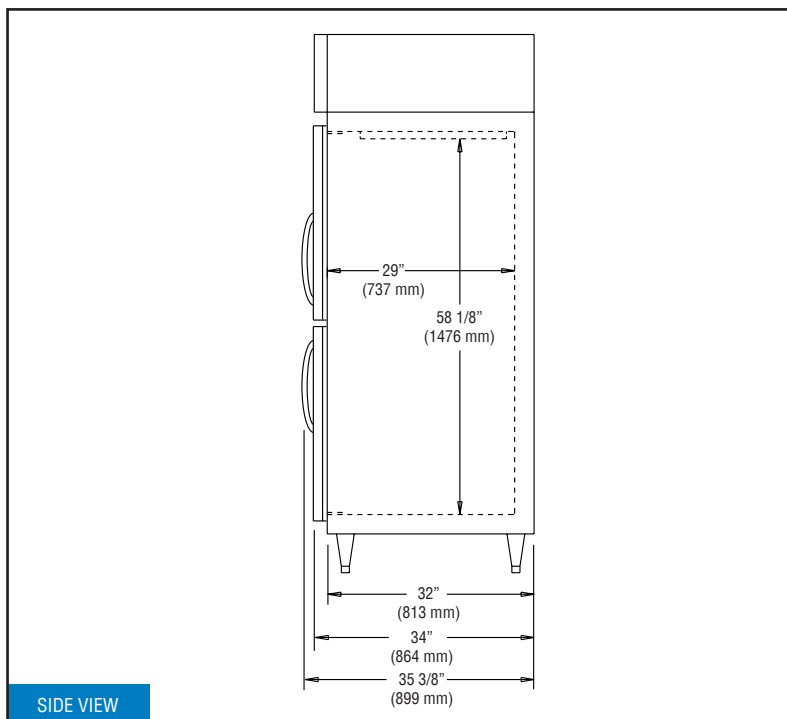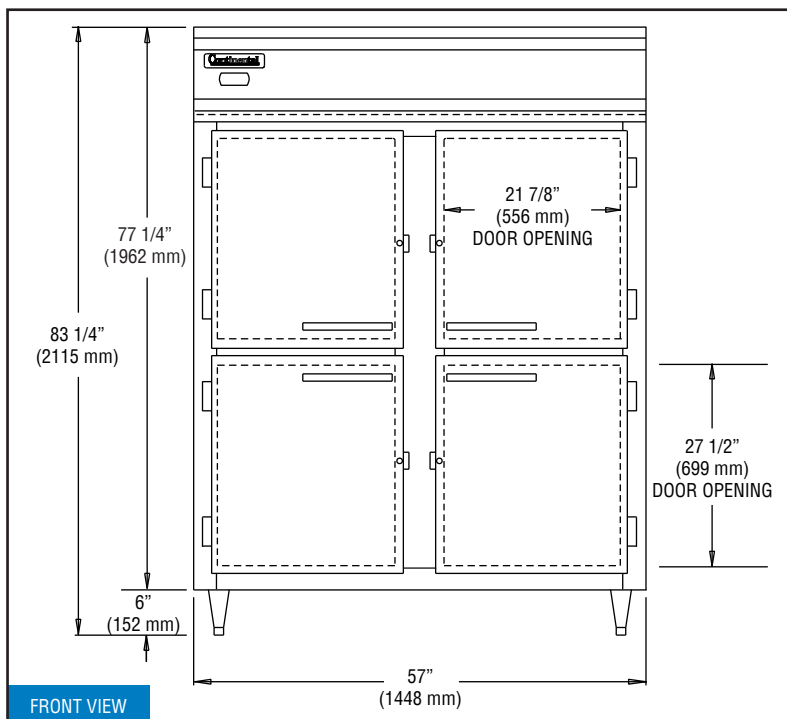

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 4/29/2022