## **DESIGNER LINE REFRIGERATOR/FREEZER**

## Model: D3RFFN

Natural Refrigerant R-290 Model



# 3-Section Dual Temp Side-By-Side Reach-In Refrigerator/Freezer (0°F)

D3RFFN - Stainless steel front, aluminum end panels and interior

D3RFFNSA - Stainless steel exterior, aluminum interior

D3RFFNSS - Stainless steel exterior and interior



## **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel case back	Shallow depth (consult factory)
Additional epoxy coated steel shelves	Hinged glass doors (consult factory)
Chrome or stainless steel shelves	Increased refrigeration systems
Pan slide assemblies	Special electrical req. (consult factory)
Rehinging of doors (consult factory)	Correctional Facility Options
Wine rack (refrigerator section)	One way security screws
Casters	Locking hasp (lock not included)
Custom laminates	Stainless steel mesh cover
Half doors	Coverless hinges
Pass-thru (consult factory)	

Consult factory for other model configurations, options and accessories.

Cont	tinent	
	Refrige	rator

**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:		
Model Specified:		
Location		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

### **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Separate, self contained, performance rated "plug" refrigeration systems

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

#### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

Heavy duty pilaster strips

6" adjustable stainless steel legs

#### **MODEL FEATURES**

LED interior lighting

Electronic controllers with digital display & hi-low alarm

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

Off-cycle defrost (refrigerator section)

Automatic electric defrost (freezer section)

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

# **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cubic feet)	48/20 (1359/566 cu I)
Width, Overall (inches)	78 (1981 mm)
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	55 ½ (1410 mm)
Clear Door Width (inches)	19 3/8 (492 mm)
Clear Door Height (inches)	58 % (1489 mm)
Height, Overall (inches) (including 5" casters)	82 ½ (2089 mm)
Number of Doors	3
Number of Shelves	9
Shelf Area (square feet) (per section)	20.4 (1.9 sq m)
Tray Slide Capacity (per section)	24
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/4, 1

### **ELECTRICAL DATA**

Capacity (BTU per hour)\*

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3/3
Total Amps (International)	5.1 (3.7) / 8.5 (5.7)
Defrost Amps (International)	5.2 (2.6)
(2) 10 ft. Cord/Plug [attach.] (International)	Yes (No)

1940 / 2470

#### **SHIPPING DATA**

SHIPPING DATA	
Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	90 (2286 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	187 (5295 cu I)
Weight Std - Crated (pounds)	835 (379 kg)
Weight SS - Crated (pounds)	950 (431 kg)

- $^{\star}$  Rating @ +25°F evaporator, 90°F ambient (refrigerator)
- \* Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Equipped with two NEMA-5-15P Plugs (varies by country)

# Continental® Refrigerator

**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

## **Model Plan Views**

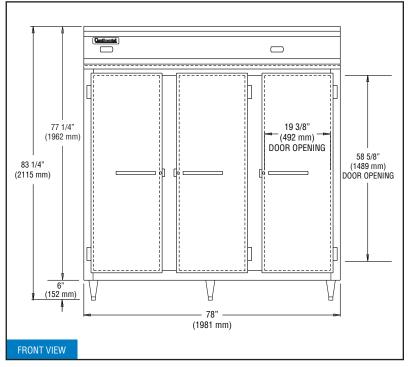

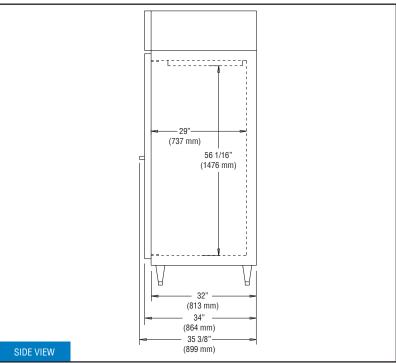

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.