

# DESIGNER LINE PASS THRU FREEZER (0°)

## Model: D3RFFENPTHD

Natural Refrigerant R-290 Model

### 3-Section Dual Temp Extra-Wide Pass-Thru Refrigerator/Freezer (0°F) with Half Doors

- D3RFFENPTHD** - Stainless steel front, aluminum end panels and interior
- D3RFFENSAPTHD** - Stainless steel exterior, aluminum interior
- D3RFFENSSPTHD** - Stainless steel exterior and interior



## Options and Accessories

(upcharge and lead times may apply)

|                                       |  |
|---------------------------------------|--|
| Additional epoxy coated steel shelves | Increased refrigeration systems  |
| Chrome or stainless steel shelves     | Special electrical req. (consult factory)  |
| Pan slide assemblies                  | <b>Correctional Facility Options</b>   |
| Rehinging of doors (consult factory)  | <ul style="list-style-type: none"> <li>• One way security screws</li> </ul>          |
| Wine rack (refrigerator section)      | <ul style="list-style-type: none"> <li>• Locking hasp (lock not included)</li> </ul> |
| Casters                               | <ul style="list-style-type: none"> <li>• Stainless steel mesh cover</li> </ul>       |
| Custom laminates                      | <ul style="list-style-type: none"> <li>• Coverless hinges</li> </ul>                 |
| Full doors                            |  |

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Separate, self contained, performance rated "plug" refrigeration systems

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

Heavy duty pilaster strips

6" adjustable stainless steel legs

### MODEL FEATURES

LED interior lighting

Electronic controllers with digital display & hi-low alarm

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

Off-cycle defrost (refrigerator section)

Automatic electric defrost (freezer section)

APPROVAL:

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
www.continentalrefrigerator.com

# Model Specifications

## DIMENSIONAL DATA

|  |                       |
|--|-----------------------|
| Net Capacity (cubic feet)                          | 50/21 (1416/595 cu l) |
| Width, Overall (inches)                            | 85 1/2 (2172 mm)      |
| Depth, Overall (inches)<br>(including handles)     | 35 3/8 (899 mm)       |
| Depth (inches) (less doors)                        | 32 (813 mm)           |
| Depth (inches) (doors open 90°)                    | 58 (1473 mm)          |
| Clear Door Width (inches)                          | 21 7/8 (556 mm)       |
| Clear Half Door Height (inches)                    | 27 1/2 (699 mm)       |
| Height, Overall (inches)<br>(including 5" casters) | 82 1/4 (2089 mm)      |
| Number of Doors                                    | 3                     |
| Number of Shelves                                  | 9                     |
| Shelf Area (square feet) (per section)             | 20.4 (1.9 sq m)       |
| Tray Slide Capacity (per half section)             | 11                    |

## REFRIGERANT DATA

|                             |             |
|-----------------------------|-------------|
| Condensing Unit Size (H.P.) | 1/4, 1      |
| Capacity (BTU per hour)*    | 1940 / 2470 |

## ELECTRICAL DATA

|   |                       |
|---|-----------------------|
| Voltage (International)                           | 115/60/1 (220/50/1)   |
| Feed Wires (including ground)                     | 3 / 3                 |
| Total Amps (International)                        | 5.5 (3.9) / 8.9 (6.2) |
| Defrost Amps (International)                      | 5.2 (2.6)             |
| (2) 10 ft. Cord/Plug [attach.]<br>(International) | Yes<br>(No)           |

## SHIPPING DATA

|                              |                  |
|------------------------------|------------------|
| Height - Crated (inches)     | 85 1/2 (2172 mm) |
| Width - Crated (inches)      | 90 (2286 mm)     |
| Depth - Crated (inches)      | 42 (1067 mm)     |
| Volume - Crated (cubic feet) | 181 (5125 cu l)  |
| Weight Std - Crated (pounds) | 885 (401 kg)     |
| Weight SS - Crated (pounds)  | 995 (451 kg)     |

\* Rating @ +25°F evaporator, 90°F ambient (refrigerator)



\* Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

# Model Plan Views

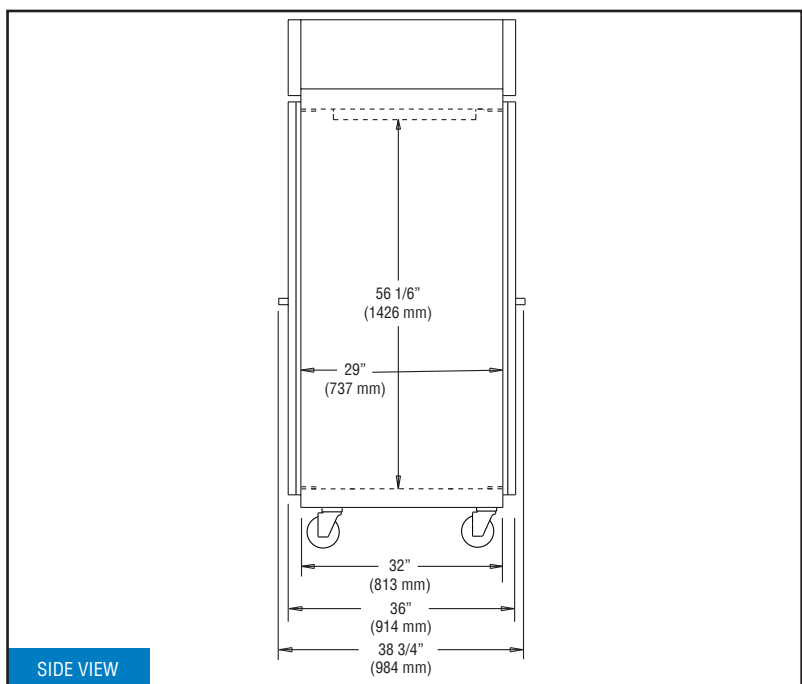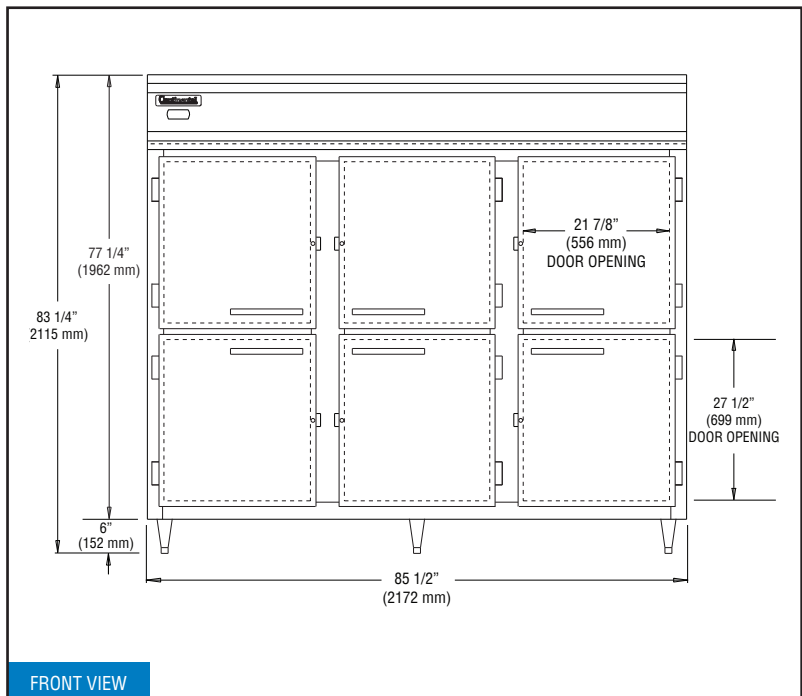

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 5/27/2022