DESIGNER LINE WARMER

Model: DL3WE-PT



3-Section Extra-Wide Pass-Thru Warmer

DL3WE-PT - Stainless steel front, aluminum end panels and interior

DL3WE-SA-PT - Stainless steel exterior, aluminum interior

DL3WE-SS-PT - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Additional chrome plated steel shelves	Rehinging of doors (consult factory)	
Stainless steel shelves	Special electrical req. (consult factory)	
Pan slide assemblies	Correctional Facility Options	
Casters	One way security screws	
Custom laminates	Locking hasp (lock not included)	
Half doors	Stainless steel mesh cover	
	Coverless hinges	

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Location:	

AIA #: SIS #:

Quantity:

Standard Model Features

HEATING SYSTEM

Item No:

Self contained, performance rated heating system

90°F to 180°F temperature range

Top mounted heating plenum "plug" with circulating fr

Top mounted heating plenum "plug" with circulating fan Unique air flow distribution ducts

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, chrome plated steel shelves

Heavy duty pilaster strips

Adjustable 6" stainless steel legs

MODEL FEATURES

Automatic interior lighting

Electronic controller with digital display & hi-low alarm

Stainless steel strip heaters located in base of interior



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA Net Capacity (cubic feet) 75 (2124 cu I) Width, Overall (inches) 85 ½ (2172 mm) Depth, Overall (inches) 38 3/4 (984 mm) (including handles) Depth (inches) (less doors) 32 (813 mm) Depth (inches) (doors open 90°) 84 (2134 mm) Clear Door Width (inches) 21 % (556 mm) Clear Door Height (inches) 58 % (1489 mm) Height, Overall (inches) 83 1/4 (2115 mm) (including 6" legs) Number of Doors 6 9 Number of Shelves Shelf Area (square feet) 66.7 (6.2 sq m)

ELECTRICAL DATA

Tray Slide Capacity (per section)

Voltage	208-230/60/1
Feed Wires (including ground)	3
Total Amps (International)	13.9 (13.9)
Total Wattage @ 208-230 volts	3000
10 ft. Cord/Plug (International)	No (No)


19


SHIPPING DATA

Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	90 (2286 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	187 (5295 cu I)
Weight Std - Crated (pounds)	800 (363 kg)
Weight SS - Crated (pounds)	840 (381 kg)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

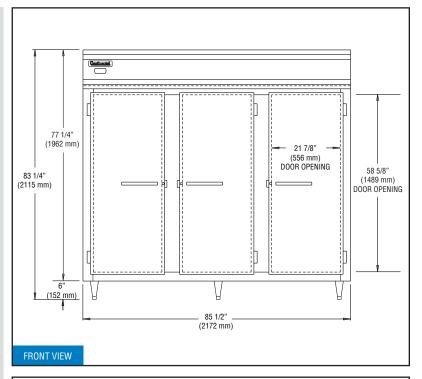

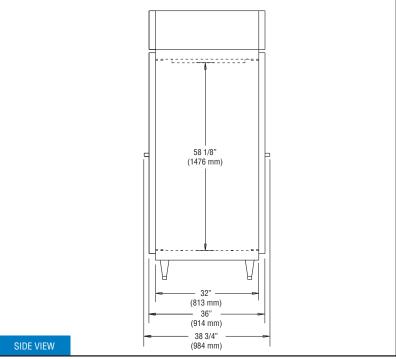

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.