DESIGNER LINE BASE MODEL


Model: DRA60NSSBS-D

Natural Refrigerant R-290 Model



60" Base Worktop Refrigerator with Drawers and 5½" Backsplash

Heavy gauge #300 Series stainless steel top, stainless steel front, end panels and interior, galvanized steel rear and grill.





Options and Accessories

(upcharge and lead times may apply)

Stainless steel back	Front breathing
Overshelves (single or double)	Drawer in lieu of door section above the condensing unit*
Casters	Condensing unit left (standard on right)
Door/drawers locks	

Consult factory for other model configurations, options and accessories,

REFRIGERATION SYSTEM

Project Name:

Performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant1

Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

Expansion valve system

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome drawer/door handles

Spring loaded, self closing doors over condensing unit

Magnetic snap in Santoprene™ drawer/door gaskets

Stainless steel roll out drawers

Completely enclosed, vented and removable rear and side grills

6" adjustable stainless steel legs

MODEL FEATURES

Electronic control, off-cycle defrost

Refrigerated section with door above the condensing unit

Field rehingeable doors over condensing unit

¹ R-290 refrigerant meets all federal and state regulatory requirements.

NOTE: Models come standard with a door over the condensing unit, a smaller width door (left section) and two tier drawers (center section). A

the condensing unit is an option. The option of having the left/center drawers located in the opposite sections MUST be indicated at the time of



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

^{*}Drawer section above condensing unit holds (1) 12 x 20 x 6 pan.

Model Specifications

19 (538 cu I)
60 (1524 mm)
36 5/16 (922 mm)
41 ½ (1054 mm)
4
1
30 (762 mm)
26 (660 mm)
12 ½ (318 mm)
17 (1422 mm)
17 (1422 mm)
1/4+
3100
115/60/1 (220/50/1)

(International) SHIPPING DATA

Total Amps (International)

10 ft. Cord/Plug [attached]

OIIII I ING DATA	
Weight (pounds)	425 (193 kg)
Height - Crated (inches)	43 ¾ (1111 mm)
Width - Crated (inches)	62 (1575 mm)
Depth - Crated (inches)	47 (1194 mm)

DRAWER PAN CONFIGURATIONS

Two Tier: (2) 12 x 20 x 6 pans per drawer

Two Narrow: (1) $12 \times 20 \times 6$ pan per drawer (supplied by others)

* Rating @ +25°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Equipped with one NEMA-5-15P Plug (varies by country)

Continental® Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

4.8 (3.3)

Yes

(No)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

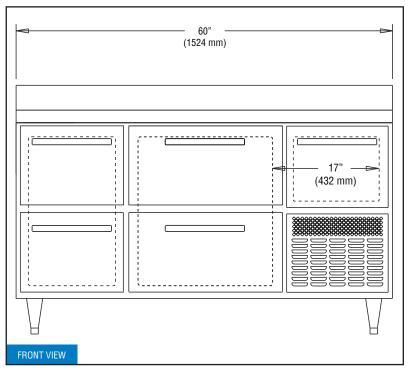

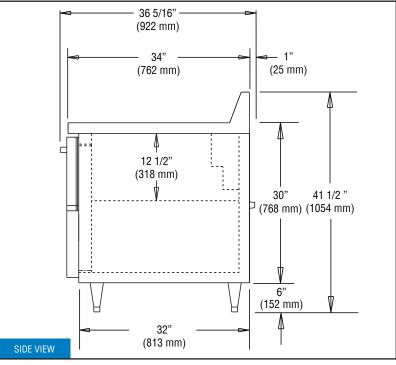

IMPORTANT NOTE: If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required</u> on sides, front and rear.