# WORKTOP REFRIGERATOR

## Model: SW48N-FB-D

Natural Refrigerant R-290 Model

48” Worktop Refrigerator
with Drawers - Front Breathing

Stainless steel front, top and end panels, aluminum back and interior.




**Project Name:**

**Model Specified:**

**Location:**

**Item No:** **Quantity:**

**AIA #:** **SIS #:**

## Standard Model Features

### REFRIGERATION SYSTEM

- Performance rated refrigeration system
- Natural, environmentally safe, high efficiency R-290 refrigerant[1]
- Automatic, hot gas condensate evaporator
- Non-corrosive, plasticized fin evaporator coil
- Easily serviceable, back mounted compressor

### CABINET ARCHITECTURE

- 2” non-CFC polyurethane foam insulation
- Smooth, polished chrome drawer handles
- Stainless steel roll out drawers
- Magnetic snap in Santoprene™ drawer gaskets
- Completely enclosed, vented and removable case back
- 3 ¾” casters

### MODEL FEATURES

- Electronic controller with digital display & hi/low alarm
- Off-cycle defrost

[1] R-290 refrigerant meets all federal and state regulatory requirements.

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.

## Options and Accessories

(upcharge and lead times may apply)

| | |
|---|---|
| Stainless steel interior | Drawer locks |
| Stainless steel back | Expansion valve system |
| Overshelves (single or double) | |
| Special electrical requirements (consult factory) | |

Consult factory for other model configurations, options and accessories.

Continental® Refrigerator

**Toll-Free: 800-523-7138**
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
**www.continentalrefrigerator.com**

**APPROVAL:**

# Model Specifications

## DIMENSIONAL DATA

| | |
|---|---|
| Net Capacity (cubic feet) | 13.4 (379 cu l) |
| Width, Overall (inches) | 48 (1219 mm) |
| Depth, Overall (inches) (including handles & bumpers) | 32 3⁄16 (818 mm) |
| Height, Overall (inches) (including 3 ¾" casters) | 34 (864 mm) |
| Number of Drawers (two tier) | 4 |

## REFRIGERANT DATA

| | |
|---|---|
| Condensing Unit Size (H.P.) | ⅕ |
| Capacity (BTU per hour)* | 1625 |

## ELECTRICAL DATA

| | |
|---|---|
| Voltage (International) | 115/60/1 (220/50/1) |
| Total Amps (International) | 2.5 (2.2) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

## SHIPPING DATA

| | |
|---|---|
| Weight (pounds) | 248 (112 kg) |
| Height - Crated (inches) | 42 (1067 mm) |
| Width - Crated (inches) | 56 (1422 mm) |
| Depth - Crated (inches) | 37 ¼ (946 mm) |

## DRAWER PAN CONFIGURATIONS


**Two Tier**: (1) 12 x 18 x 6 pan per drawer
or (1) ½ size x 6 & (1) ⅓ x 6 pans per drawer

* Rating @ +25°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.




Equipped with one NEMA-5-15P Plug
(varies by country)

# Model Plan Views

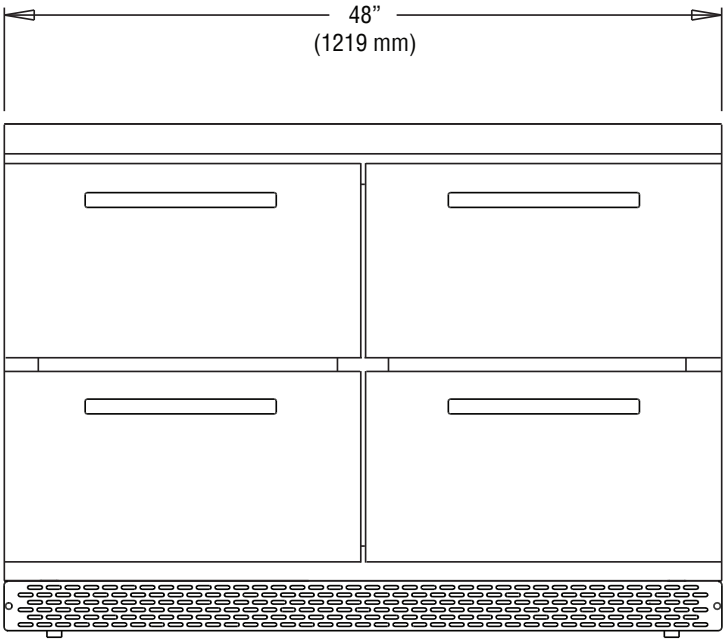


FRONT VIEW

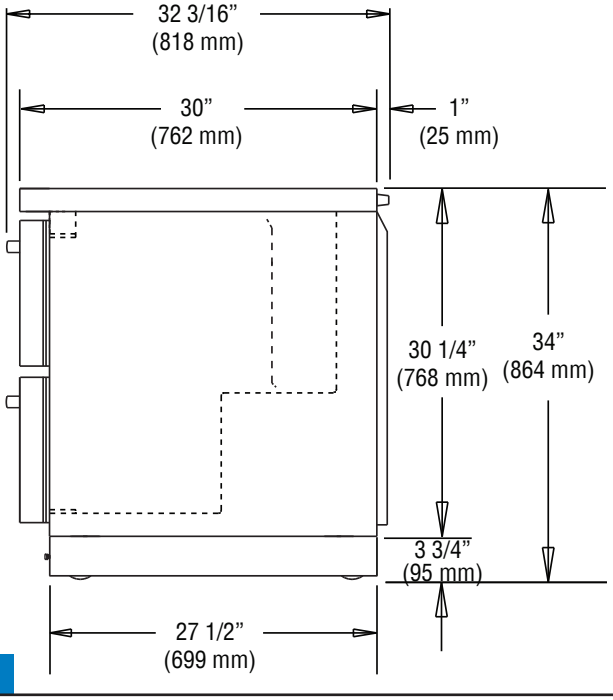


SIDE VIEW

**NOTE:** For proper operation, the area under and in front of the cabinet **must** not be obstructed in any way.


Continental Refrigerator

**Toll-Free: 800-523-7138**
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
**www.continentalrefrigerator.com**


Due to our continued efforts in developing innovative products, specifications subject to change without notice.

Intertek

Proudly Designed and Assembled in the USA


© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.



REVISED: 5/16/2022