WORKTOP REFRIGERATOR

Model: SW48N


Natural Refrigerant R-290 Model

48" Worktop Refrigerator with Solid Doors



ENERGY STAR® Qualified Commercial Refrigerator

Stainless steel front, top and end panels, aluminum back and interior.



Continental

Options and Accessories

(upcharge and lead times may apply)

Stainless steel interior	Stainless steel shelves
Stainless steel back	Door locks
Drawers in lieu of doors (consult factory)**	Special electrical requirements (consult factory)
Additional epoxy coated steel shelves	Expansion valve system
Overshelves (single or double)	Adjustable Legs

 $\label{lem:consult} \textbf{Consult factory for other model configurations, options and accessories.}$

Standard Model Features

REFRIGERATION SYSTEM

Performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handles

Spring loaded, self closing doors

Magnetic snap in Santoprene™ door gaskets

Heavy duty, epoxy coated steel shelves

Completely enclosed, vented and removable case back

5" casters

MODEL FEATURES

Field rehingeable doors

Electronic controller with digital display & hi/low alarm

Off-cycle defrost

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

 $^{^{\}star\star}$ Two tier: (1) 12 x 18 x 6 pan per drawer or (1) 1/2 size x 6 & (1) 1/3 x 6 pans per drawer

Model Specifications

DIMENSIONAL DATA Net Capacity (cubic feet) 13.4 (379 cu I) Width, Overall (inches) 48 (1219 mm) Depth, Overall (inches) 32 3/16 (818 mm) (including handles & bumpers) Height, Overall (inches) 35 1/4 (895 mm) (including 5" casters) 6.8 (0.6 sq m) Shelf Area (square feet) Number of Shelves 2 Number of Doors 2

See Drawing

26 1/4 (667 mm)

44 (1118 mm)

REFRIGERANT DATA

Interior Depth (inches)

Interior Height (inches)

Interior Width (inches)

Condensing Unit Size (H.P.)	1/5
Capacity (BTU per hour)*	1625

^{*} Rating @ +25°F evaporator, 90°F ambient

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	2.5 (2.2)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Weight (pounds)	248 (112 kg)
Height - Crated (inches)	43 ¼ (1099 mm)
Width - Crated (inches)	56 (1422 mm)
Depth - Crated (inches)	37 1/4 (946 mm)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









 $\@$ Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

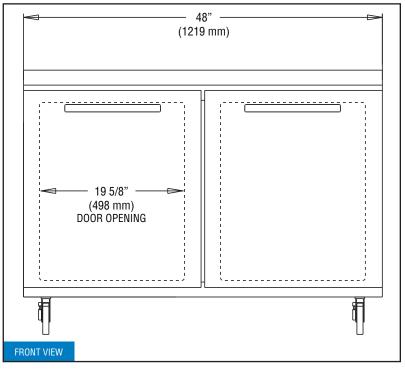

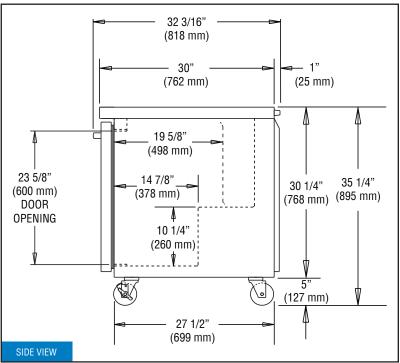

IMPORTANT NOTE: If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required</u> on sides, front and rear.