UNDERCOUNTER REFRIGERATOR

Model: SW60N-U


Natural Refrigerant R-290 Model

60" Undercounter Refrigerator with Solid Doors



ENERGY STAR® Qualified Commercial Refrigerator

Stainless steel front, top and end panels, aluminum back and interior.



Continental

Options and Accessories

(upcharge and lead times may apply)

| Stainless steel interior | Stainless steel shelves |
|--|---|
| Stainless steel back | Door locks |
| Drawers in lieu of doors (consult factory)** | Special electrical requirements (consult factory) |
| Additional epoxy coated steel shelves | Expansion valve system |

Consult factory for other model configurations, options and accessories.

Standard Model Features

REFRIGERATION SYSTEM

Performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handles

Spring loaded, self closing doors

Magnetic snap in Santoprene™ door gaskets

Heavy duty, epoxy coated steel shelves

Completely enclosed, vented and removable case back

1 3/8" diameter plate casters (factory installed)

MODEL FEATURES

Field rehingeable doors
Off-cycle defrost
Electronic controller with digital display & hi/low alarm
2" high, bottom mounted front breather air divider

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

^{**}Two Tier: (1) 12 x 20 x 6 pan per drawer

Model Specifications

| DIMENSIONAL DATA | |
|--|-------------------------------|
| Net Capacity (cubic feet) | 17.0 (481 cu l) |
| Width, Overall (inches) | 60 (1524 mm) |
| Depth, Overall (inches) (including handles & bumpers) | 32 ³ ⁄16 (818 mm) |
| Height, Overall (inches) (including 1 3/8" plate casters) | 31 ¹³ ⁄16 (808 mm) |
| Shelf Area (square feet) | 8.1 (0.8 sq m) |
| No. of Shelves | 2 |
| No. of Doors | 2 |
| Interior Depth (inches) | See Drawing |
| Interior Height (inches) | 26 1/4 (667 mm) |
| Interior Width (inches) | 56 (1422 mm) |

REFRIGERANT DATA

| Condensing Unit Size (H.P.) | 1/5 |
|-----------------------------|------|
| Capacity (BTU per hour)* | 1625 |

ELECTRICAL DATA

| Voltage (International) | 115/60/1 (220/50/1) |
|---|---------------------|
| Total Amps (International) | 2.5 (2.2) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

SHIPPING DATA

| Weight (pounds) | 284 (129 kg) |
|--------------------------|------------------|
| Height - Crated (inches) | 43 1/4 (1099 mm) |
| Width - Crated (inches) | 68 (1727 mm) |
| Depth - Crated (inches) | 37 ½ (946 mm) |

* Rating @ +25°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

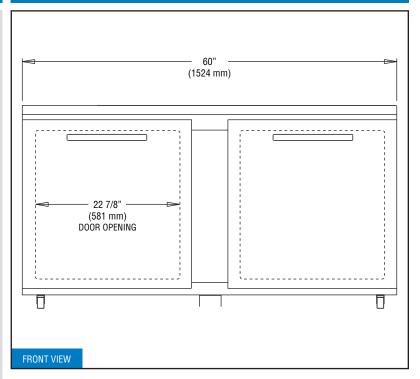

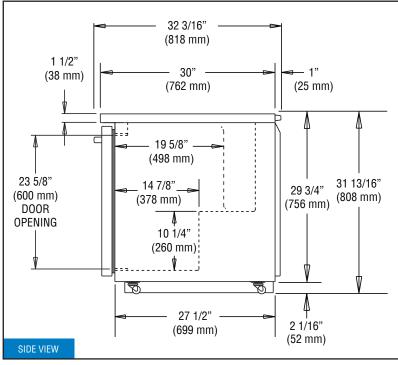

NOTE: For proper operation, the area under and in front of the cabinet **must** not be obstructed in any way.