WORKTOP REFRIGERATOR

Model: SW72N-D

Natural Refrigerant R-290 Model

72” Worktop Refrigerator
with Drawers

Stainless steel front, top and end panels, aluminum back and interior.



Project Name:

Model Specified:

Location:

Item No: **Quantity:**

AIA #: **SIS #:**

Standard Model Features

REFRIGERATION SYSTEM

- Performance-rated refrigeration system
- Natural, environmentally safe, high efficiency R-290 refrigerant[1]
- Automatic, hot gas condensate evaporator
- Non-corrosive, plasticized fin evaporator coil
- Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

- 2” non-CFC polyurethane foam insulation
- Smooth, polished chrome drawer handles
- Stainless steel roll out drawers
- Magnetic snap in Santoprene™ drawer gaskets
- Completely enclosed, vented and removable case back
- 5” casters

MODEL FEATURES

- Off-cycle defrost
- Electronic controller with digital display & hi/low alarm

[1] R-290 refrigerant meets all federal and state regulatory requirements.

Options and Accessories

(upcharge and lead times may apply)

Stainless steel interior	Drawer locks
Stainless steel back	Special electrical requirements (consult factory)
Overshelves (single or double)	
Adjustable legs	

Consult factory for other model configurations, options and accessories.

APPROVAL:

Continental® Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	20.6 (583 cu l)
Width, Overall (inches)	72 (1829 mm)
Depth, Overall (inches) (including handles & bumpers)	32 3⁄16 (818 mm)
Height, Overall (inches) (including 5" casters)	35 ¼ (895 mm)
Number of Drawers (two tier)	6

REFRIGERANT DATA

Condensing Unit Size (H.P.)	⅕
Capacity (BTU per hour)*	1625

* Rating @ +25°F evaporator, 90°F ambient

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	2.5 (2.2)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Weight (pounds)	318 (144 kg)
Height - Crated (inches)	43 ¼ (1099 mm)
Width - Crated (inches)	80 (2032 mm)
Depth - Crated (inches)	37 ¼ (946 mm)

DRAWER PAN CONFIGURATIONS


Two Tier: (1) 12 x 18 x 6 pan per drawer
or (1) ½ size x 6 & (1) ⅓ size x 6 pans per drawer

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.




Equipped with one NEMA-5-15P Plug
(varies by country)

Model Plan Views

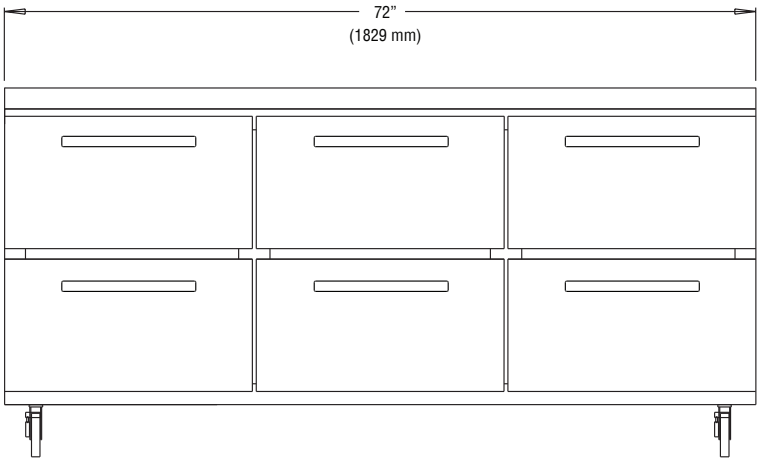

FRONT VIEW

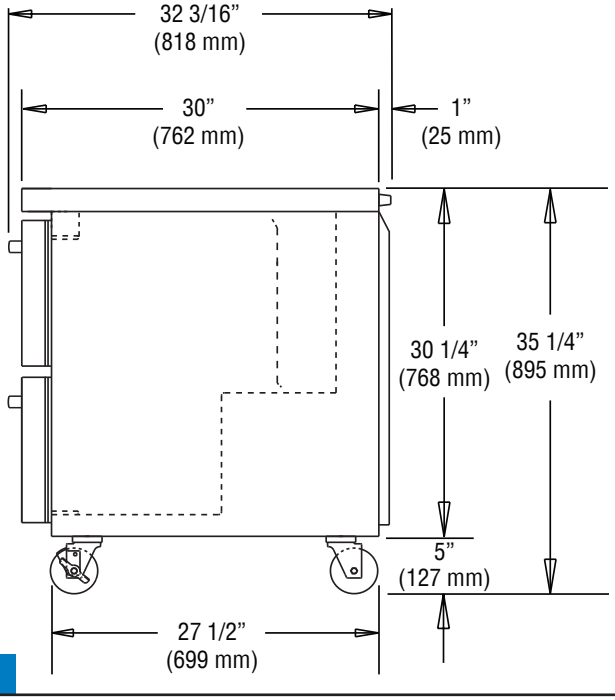

SIDE VIEW

IMPORTANT NOTE: If the cabinet is located directly against a wall, a minimum clearance of 3" is required on sides, front and rear.

Continental Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

Intertek

Proudly Designed and Assembled in the USA

© Copyright 2021. Continental Refrigerator.
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 5/16/2022