

# UNDERCOUNTER REFRIGERATOR

## Model: **SW72NGD-U**

Natural Refrigerant R-290 Model

### 72" Undercounter Display Refrigerator with Hinged Glass Doors

Stainless steel front, top and end panels, aluminum back and interior.



## Options and Accessories

(upcharge and lead times may apply)

|                                       |                                                      |
|---------------------------------------|------------------------------------------------------|
| Stainless steel interior              | Stainless steel shelves                              |
| Stainless steel back                  | Door lock                                            |
| Additional epoxy coated steel shelves | Special electrical requirements<br>(consult factory) |
| Solid door (consult factory)          |                                                      |
| Expansion valve system                |                                                      |

Consult factory for other model configurations, options and accessories.

**Continental**<sup>®</sup>  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Performance rated refrigeration system

Natural, environmentally safe,  
high efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

### CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Double pane, low emissivity, tempered hinged glass doors

Magnetic snap in door gaskets

Heavy duty, epoxy coated steel shelves

Completely enclosed, vented and removable case back

1 3/8" diameter plate casters (factory installed)

### MODEL FEATURES

LED interior lighting

Electronic controller with digital display & hi/low alarm

Off-cycle defrost

2" high, bottom mounted front breather air divider

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|                                                                         |                             |
|-------------------------------------------------------------------------|-----------------------------|
| Net Capacity (cubic feet)                                               | 20.6 (583 cu l)             |
| Width, Overall (inches)                                                 | 72 (1829 mm)                |
| Depth, Overall (inches)<br>(including handles & bumpers)                | 31 $\frac{7}{16}$ (799 mm)  |
| Height, Overall (inches)<br>(including 1 $\frac{3}{8}$ " plate casters) | 31 $\frac{13}{16}$ (808 mm) |
| Shelf Area (square feet)                                                | 10.2 (0.9 sq m)             |
| Number of Shelves                                                       | 3                           |
| Number of Doors                                                         | 3                           |
| Interior Depth (inches)                                                 | See Drawing                 |
| Interior Height (inches)                                                | 26 $\frac{1}{4}$ (667 mm)   |
| Interior Width (inches)                                                 | 68 (1727 mm)                |

### REFRIGERANT DATA

|                             |               |
|-----------------------------|---------------|
| Condensing Unit Size (H.P.) | $\frac{1}{5}$ |
| Capacity (BTU per hour)*    | 1625          |

### ELECTRICAL DATA

|                                                |                     |
|------------------------------------------------|---------------------|
| Voltage (International)                        | 115/60/1 (220/50/1) |
| Total Amps (International)                     | 2.5 (2.2)           |
| 10 ft. Cord/Plug [attached]<br>(International) | Yes<br>(No)         |

### SHIPPING DATA


|                          |                            |
|--------------------------|----------------------------|
| Weight (pounds)          | 385 (175 kg)               |
| Height - Crated (inches) | 43 $\frac{1}{4}$ (1099 mm) |
| Width - Crated (inches)  | 80 (2032 mm)               |
| Depth - Crated (inches)  | 37 $\frac{1}{4}$ (946 mm)  |

\* Rating @ +25°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.




Equipped with one NEMA-5-15P Plug  
(varies by country)

## Model Plan Views

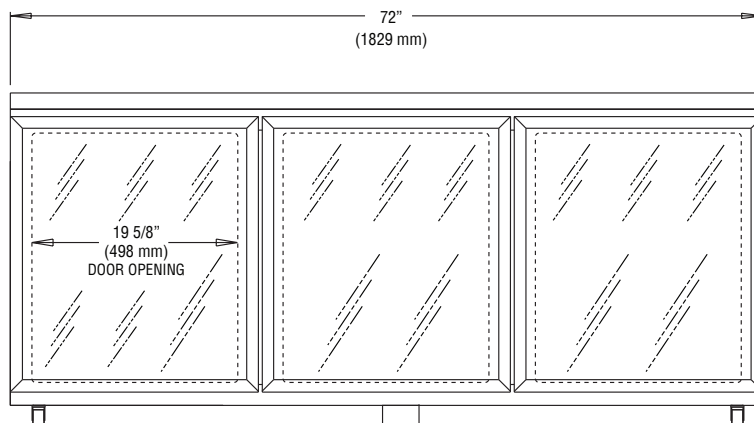

FRONT VIEW

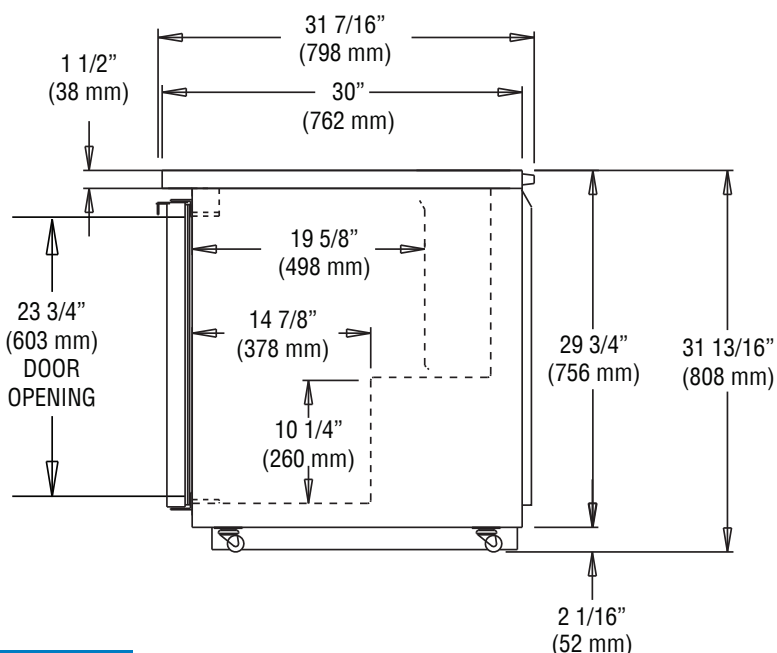

SIDE VIEW

**NOTE:** For proper operation, the area under and in front of the cabinet **must** not be obstructed in any way.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 5/16/2022