

# WORKTOP FREEZER (0°F)

## Model: SWF32NBS-FB-D

Natural Refrigerant R-290 Model

32" Worktop Freezer with Drawers  
and 5½" Backsplash - Front Breathing

Stainless steel front, top and end panels, aluminum back and interior.



## Options and Accessories

(upcharge and lead times may apply)

|                                |                                                      |
|--------------------------------|------------------------------------------------------|
| Stainless steel interior       | Drawer locks                                         |
| Stainless steel back           | Special electrical requirements<br>(consult factory) |
| Overshelves (single or double) |                                                      |

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Performance rated refrigeration system

Natural, environmentally safe,  
high efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

### CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome drawer handles

Stainless steel roll out drawers

Magnetic snap in Santoprene™ drawer gaskets

Completely enclosed, vented and removable case back

3 ¾" casters

### MODEL FEATURES

Electronic controller with digital display & hi/low alarm

Automatic electric defrost

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|                                                                   |                            |
|-------------------------------------------------------------------|----------------------------|
| Net Capacity (cubic feet)                                         | 9.0 (253 cu l)             |
| Width, Overall (inches)                                           | 32 (813 mm)                |
| Depth, Overall (inches)<br>(including handles & bumpers)          | 32 $\frac{3}{16}$ (818 mm) |
| Height, Overall (inches)<br>(including 3 $\frac{3}{4}$ " casters) | 39 $\frac{1}{2}$ (1003 mm) |
| Number of Drawers (two tier)                                      | 2                          |

### REFRIGERANT DATA

|                             |               |
|-----------------------------|---------------|
| Condensing Unit Size (H.P.) | $\frac{1}{3}$ |
| Capacity (BTU per hour)*    | 1800          |

### ELECTRICAL DATA

|                                                |                     |
|------------------------------------------------|---------------------|
| Voltage (International)                        | 115/60/1 (220/50/1) |
| Total Amps (International)                     | 5.6 (3.6)           |
| Defrost Amps (International)                   | 4.8 (2.4)           |
| 10 ft. Cord/Plug [attached]<br>(International) | Yes<br>(No)         |

### SHIPPING DATA

|                          |                            |
|--------------------------|----------------------------|
| Weight (pounds)          | 221 (100 kg)               |
| Height - Crated (inches) | 47 $\frac{1}{2}$ (1207 mm) |
| Width - Crated (inches)  | 40 (1016 mm)               |
| Depth - Crated (inches)  | 37 $\frac{1}{4}$ (946 mm)  |

### DRAWER PAN CONFIGURATIONS



**Two Tier:** (1) 12 x 20 x 6 pan per drawer  
or (1)  $\frac{1}{2}$  size x 6 & (2)  $\frac{1}{3}$  x 6 pans per drawer

\* Rating @ -15°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

## Model Plan Views

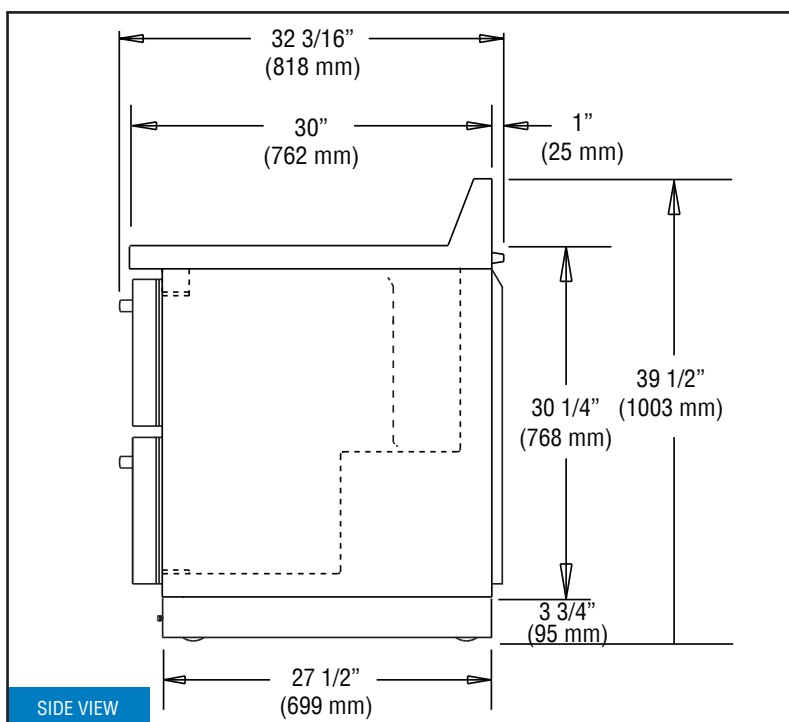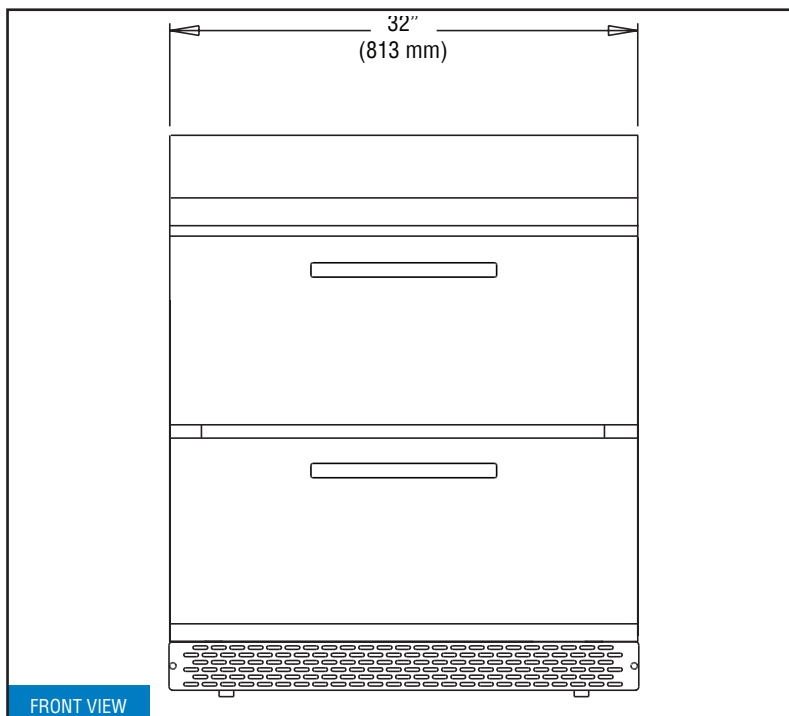

**NOTE:** For proper operation, the area under and in front of the cabinet **must** not be obstructed in any way.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

REVISED: 5/16/2022