

WORKTOP FREEZER (0°F)

Model: SWF36N

Natural Refrigerant R-290 Model

36" Worktop Freezer with Solid Doors

Stainless steel front, top and end panels, aluminum back and interior.



Options and Accessories

(upcharge and lead times may apply)

| | |
|---------------------------------------|--|
| Stainless steel interior | Stainless steel shelves |
| Stainless steel back | Door lock |
| Overshelves (single or double) | Special electrical requirements (consult factory) |
| Additional epoxy coated steel shelves | |
| Adjustable legs | |

Consult factory for other model configurations, options and accessories.

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance rated refrigeration system

Natural, environmentally safe,
high efficiency R-290 refrigerant¹

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handles

Spring loaded, self closing doors

Magnetic snap in Santoprene™ door gaskets

Heavy duty, epoxy coated steel shelves

Completely enclosed, vented and removable case back

5" casters

MODEL FEATURES

Field rehingeable doors

Electronic controller with digital display & hi/low alarm

Automatic electric defrost

¹ R-290 refrigerant meets all federal and state regulatory requirements.

Continental[®]
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|--|----------------------------|
| Net Capacity (cubic feet) | 10.3 (292 cu l) |
| Width, Overall (inches) | 36 (914 mm) |
| Depth, Overall (inches) (including handles & bumpers) | 32 $\frac{3}{16}$ (818 mm) |
| Height, Overall (inches) (including 5" casters) | 35 $\frac{1}{4}$ (895 mm) |
| Shelf Area (square feet) | 4.6 (0.4 sq m) |
| Number of Shelves | 2 |
| Number of Doors | 2 |
| Interior Depth (inches) | See Drawing |
| Interior Height (inches) | 26 $\frac{1}{4}$ (667 mm) |
| Interior Width (inches) | 32 (813 mm) |

REFRIGERANT DATA

| | |
|-----------------------------|---------------|
| Condensing Unit Size (H.P.) | $\frac{1}{3}$ |
| Capacity (BTU per hour)* | 1800 |

ELECTRICAL DATA

| | |
|--|---------------------|
| Voltage (International) | 115/60/1 (220/50/1) |
| Total Amps (International) | 5.7 (3.6) |
| Defrost Amps (International) | 4.8 (2.4) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

SHIPPING DATA



| | |
|--------------------------|----------------------------|
| Weight (pounds) | 239 (108 kg) |
| Height - Crated (inches) | 43 $\frac{1}{4}$ (1099 mm) |
| Width - Crated (inches) | 44 (1118 mm) |
| Depth - Crated (inches) | 37 $\frac{1}{4}$ (946 mm) |

* Rating @ -15°F evaporator, 90°F ambient
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug
 (varies by country)

Model Plan Views

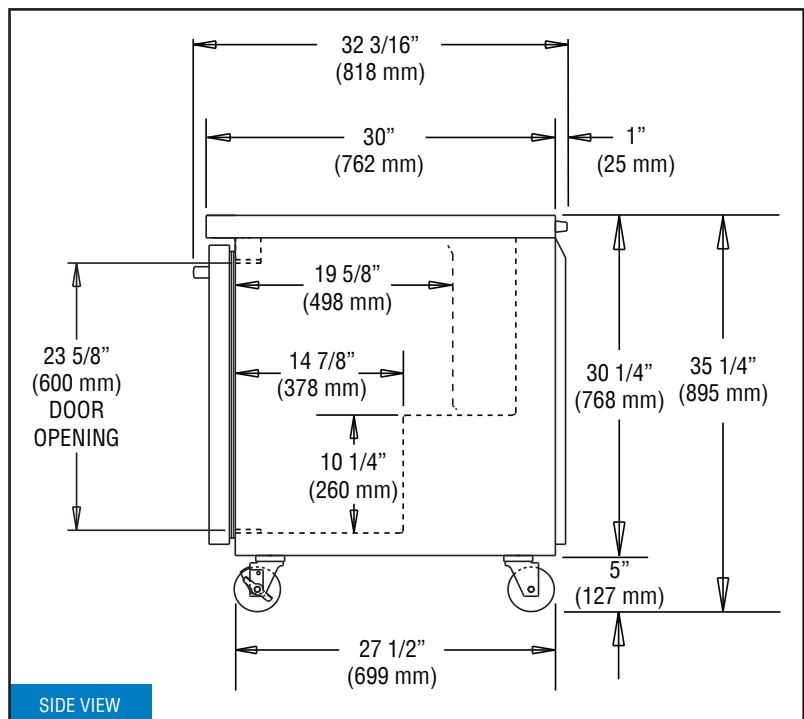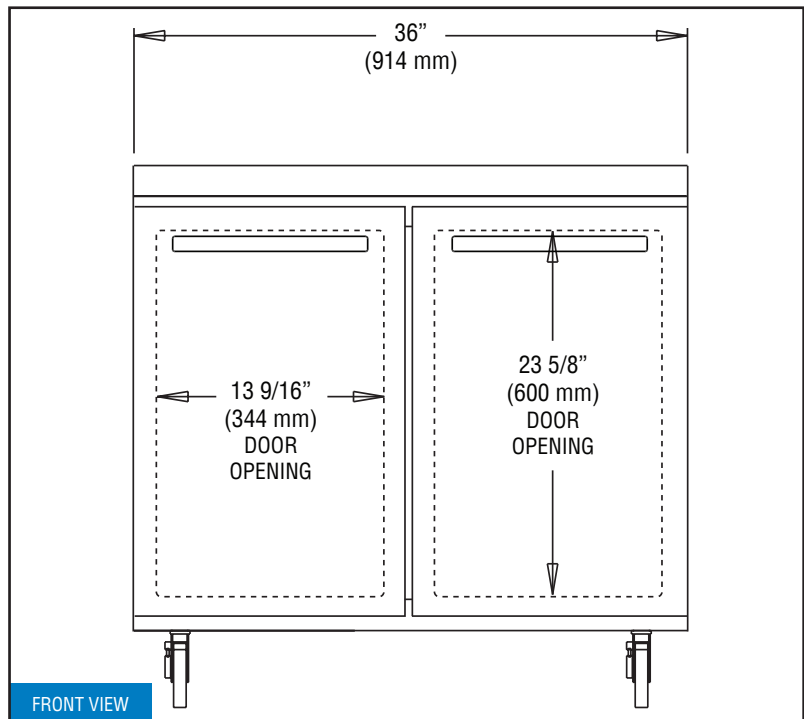

IMPORTANT NOTE: If the cabinet is located directly against a wall, a minimum clearance of 3" is required on sides, front and rear.

Continental
 Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

