WORKTOP FREEZER (O°F)

Model: SWF36NBS-FB

Natural Refrigerant R-290 Model

36" Worktop Freezer with Solid Doors and 5½" Backsplash - Front Breathing

Stainless steel front, top and end panels, aluminum back and interior.



Options and Accessories

(upcharge and lead times may apply)

Stainless steel interior	Stainless steel shelves	
Stainless steel back	Door lock	
Overshelves (single or double)	Special electrical requirements (consult factory)	
Additional epoxy coated steel shelves		

Consult factory for other model configurations, options and accessories

Project Name:		
Model Specified:		
Laatian		
Location:		
Item No:	Quantity:	
itom ito.	Quantity.	

Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA #:

Performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant1

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handles

Spring loaded, self closing doors

Magnetic snap in Santoprene™ door gaskets

Heavy duty, epoxy coated steel shelves

Completely enclosed, vented and removable case back

3 3/4" casters

MODEL FEATURES

Electronic controller with digital display & hi/low alarm

Field rehingeable doors

Automatic electric defrost

¹ R-290 refrigerant meets all federal and state regulatory requirements.

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA 10.3 (292 cu l) Net Capacity (cubic feet) 36 (914 mm) Width, Overall (inches) Depth, Overall (inches) 32 3/16 (818 mm) (including handles & bumpers) Height, Overall (inches) 39 ½ (1003 mm) (including 3 3/4" casters) Shelf Area (square feet) 4.6 (0.4 sq m) Number of Shelves Number of Doors 2 Interior Depth (inches) See Drawing Interior Height (inches) 26 1/4 (667 mm) 32 (813 mm) Interior Width (inches)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3	
Capacity (BTU per hour)*	1800	

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	5.7 (3.6)
Defrost Amps (International)	4.8 (2.4)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Weight (pounds)	239 (108 kg)
Height - Crated (inches)	47 ½ (1207 mm)
Width - Crated (inches)	44 (1118 mm)
Depth - Crated (inches)	37 1/4 (946 mm)

* Rating @ -15°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

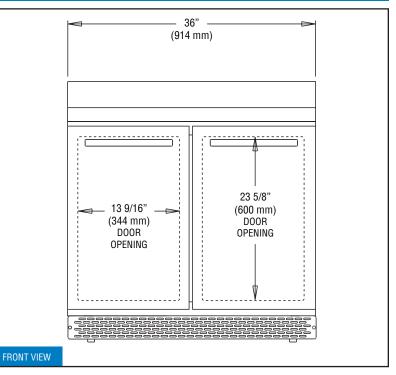

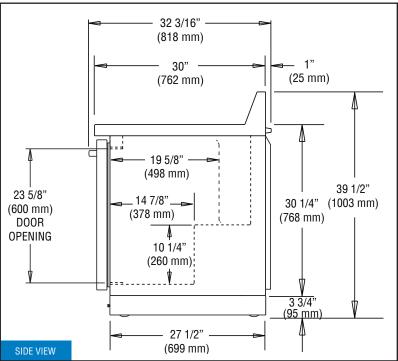

 $\underline{\textbf{NOTE}}\text{: For proper operation, the area under and in front of the cabinet }\underline{\textbf{must}}\text{ not be obstructed in any way.}$