

GAS COUNTER STEAMER AUTO FILL, AUTO DRAIN



Model shown is an SX-5G3

SPECIFICATIONS:

Shall be a Crown model SX-5G3, convection steamer with a gas fired stainless steel steam generator. AGA/CGA and NSF Certified. The cavity shall be 5 pan capacity. The steamer shall be constructed of a satin finish stainless steel, type 304. The cooking chamber is a one piece all welded, type 316, stainless steel with coved corners. The heavy duty door shall have an inner liner of stainless steel with a full perimeter gasket seal, an outer liner of one piece all welded stainless steel, and a positive lock and seal mechanism with spring release. The compartment shall be provided with removable stainless steel pan supports. A stainless steel drip trough shall be integrally connected to the drain in order to collect condensate when the door is opened.

The control housing, constructed of stainless steel with a full access removable panel contains the controls which include an illuminated three way power switch (On/Off/De-lime), a pilot ready light, a pilot cooking light, 60 minute electric timer with audible alarm at the end of the cooking cycle, solid state generator controls, and electronic ignition. Steam flow to the cooking chamber shall be interrupted when the door is opened and shall be reactivated when door is closed.

Standard features include automatic generator blow down de-lime mode power setting and a de-liming port for the generator located on the right side panel. The unit also comes with split water connections for simple hook up to a water treatment system. Steamer is mounted on 4" high stainless steel adjustable legs.

*SEE REVERSE SIDE OF SPEC SHEET FOR WATER

Compartment Pan Capacity							
Model	PanDepth						
iviodei	1"	2-1/2"	4"	6"			
SX-5G3	10	5	3	2			

TREATMENT SYSTEM STATEMENTS* OPERATION SHALL BE BY:

Gas fired, stainless steel, steam generator operating at 0 psi (0 kPa) rated at 47,000 BTUs.

The generator shall be equipped for operation on:

- Natural Gas
- LP Gas

The controls shall be equipped for operation on:

□ 120 VAC, 1 Phase, 50/60 Hz. (specify)

STANDARD FEATURES:

- Water Treatment System
- 304 stainless steel exterior.
- 316 stainless steel cooking chamber with coved corners.
- Heavy gauge stainless steel door with full perimeter gasket.
- Positive lock and seal mechanism with spring release door.
- Illuminated power switch.
- Ready indicator light.
- Cooking indicator light.
- 60 minute electromechanical timer with end of cycle audible alarm.
- Removable stainless steel pan supports.
- 4" adjustable legs
- Electromechanical controls.


OPTIONS AND ACCESSORIES:


- □ 220 VAC, 1 Phase, 50/60 Hz. (specify)
- ☐ Single pantry spray hose c/w bracket, left side mount
- ☐ Double pantry spray hose c/w bracket, left side mount
- Correctional package
- □ Load Compensating Timer
- ☐ 28" high single unit stand (UNIT IS NOT STACKABLE)
- ☐ Water in "Y" strainer (condenser feed)









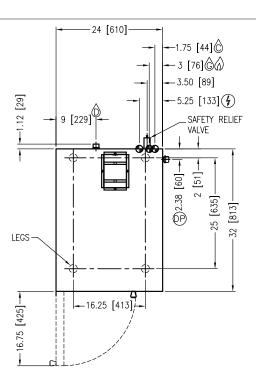

SERVICE CONNECTIONS

- (f) ELECTRICAL CONNECTION: Unless otherwise specified, field wire electrical connection to be 120 V, 60 Hz., single phase with grounding wire. Furnished with 6 foot cord with 3 prong plug. Maximum amps 2.0.
- 6 DRAIN: 1" IPS piped to open floor drain. No solid connection. Copper only. 24" maximum length before open air gap opening. (No bends or elbows)
- 🖒 GENERATOR WATER: 3/8" (10 mm) O.D. tubing at 25-50 psi (170-345 kPa).
- © CONDENSING WATER: 3/8" (10 mm) O.D. tubing at 25-50 psi (170-345 kPa).
- (P) DELIME PORT: 3/4" IPS

UTILITY CONNECTIONS

Model	GAS SUPPLY				MINNIMUM CLEARANCE			
WIODEL	SHIPPING WEIGHT	EIGHT BTU/HR. KW/HR. SUPPLY PIPE PRESS		RESSURE (W.C.)	LEFT	RIGHT	Васк	
SX-5G3	250 lbs. [113 kg]	47,000	13.8	Natural 6" - 14" (152 - 356 mm)	Propane 11" - 14" (279 - 356 mm)	3" [76 mm]	8" [203 mm]	6" [152 mm]

WATER QUALITY STATEMENT

Water is the essential ingredient in steam equipment, water quality is the major factor affecting the performance of your appliance. Crown Steam Group offers a Comprehensive Water Treatment System which exceeds our minimum water requirements. Proof of installation and proper cartridges replacement is required for warranty coverage. Water supply to Crown Steam Group steamers must be within these guidelines.

Total dissolved solids	Less than 60 PPM
Total alkalinity	Less than 20 PPM
Silica	Less than 13 PPM
Chlorine	Less than 1.5 PPM
pH Factor	6.8 - 7.3

Water which does not meet these standards should be treated with the installation of Middleby's Water Treatment System. Call 919-762-1000 if you have questions concerning your water meeting these parameters.

*Failure or malfunction of this appliance due to poor water quality is not covered under warranty. Reference www.crownsteamgroup.com for complete warranty details and instructions.



INTENDED FOR COMMERCIAL USE ONLY. NOT FOR HOUSEHOLD USE.

70 Oakdale Road, Toronto ON, Canada M3N IV9 (919) 762-1000 www.crownsteamgroup.com