

## SALD-1 Salad and Vegetable Drier

Models

SALD-1

D-1 115V/60Hz salad and vegetable drier



## Standard Features

- Body is 18-gauge stainless steel
- Legs are 1" diameter 16-gauge stainless steel tubing

Project

Quantity \_\_\_\_\_ CSI Section 11400

Approved Date

> Options & Accessories

Additional polyethylene liner

- (3) 4.00" diameter polyurethane locking stem casters
- Outer lid is 18-gauge stainless steel
- Inner liner is perforated durable polyethylene plastic
- Water-tight motor and controls are mounted on the bottom of the unit
- 6' cord and plug supplied
- Unit has 1.50" drain
- Adjustable ON/OFF timer for drying times up to 5 minutes
- Lid and cover storing hooks come standard
- One year parts and 90 day labor warranty

## Specifications

**Outer body** is constructed of 18-gauge stainless steel. Legs are 1.00" (25mm) outside diameter, 16-gauge stainless steel tubing with 4.00" (10cm) diameter locking stem casters for mobility.

Outer lid is constructed of 18-gauge stainless steel.

**Inner liner** is a one-piece durable polyethylene plastic with 0.38" (1cm) diameter holes for proper water disbursement.

Unit has a completely enclosed, water-tight motor mounted underneath the unit.

Unit has a 1.50" (4cm) outside diameter drain, and an adjustable on/off timer for selection of drying cycles of up to five minutes.

Stainless steel hooks are mounted on the lid and sides of the unit for storage of the lid and cord when unit is not in use.

**Electrical** box for capacitor and timer control is mounted on the bottom of the unit. Six foot cord and plug are supplied. SALD-1 is 115 Volt, 60 Hertz single phase.




81

Phone: 800-733-8948 or 989-773-7981 Fax: 800-669-0619

www.delfield.com



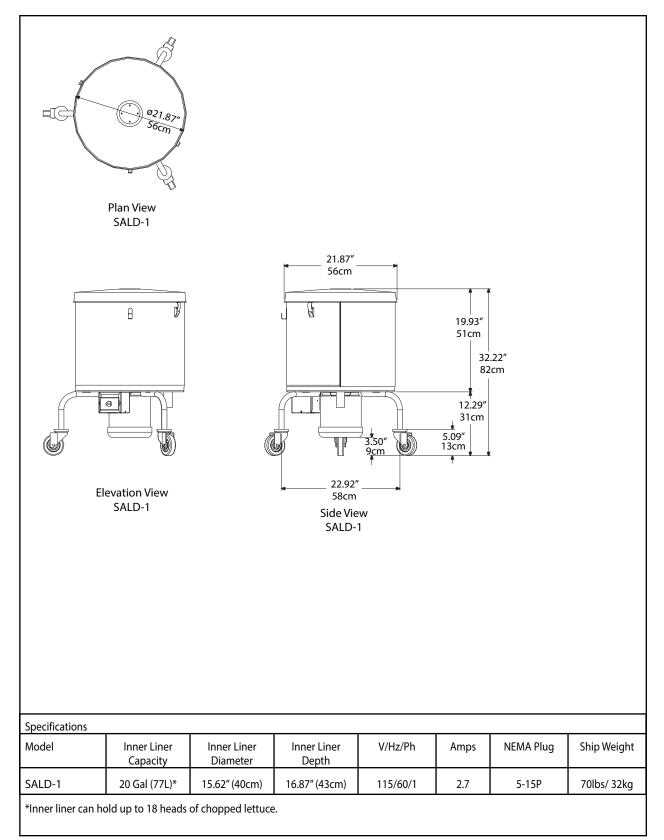

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd. Mt. Pleasant, Michigan 48858 Phone: 800-733-8948 or 989-773-7981 Fax: 800-669-0619 www.delfield.com Printed in the U.S.A. 6294\_DEL\_SALD 04/17



SALD-1 Salad and Vegetable Drier