

SALAD PREP TABLE REFREGERATOR REGULAR/MEGA TOP



Features & Benefits

- ⊙ Stainless steel inside and outside,sealed interior floors and rounded cabinet corners for easy cleaning
- ⊙ Self closing doors with stay open feature,lifetime guaranteed door hinges
- ⊙ Digital temperature controller with automatic defrost system
- ⊙ Forced air refrigeration system
- ⊙ Adjustable,heavy duty shelves
- ⊙ Back mounted compressor

Technical Specifications

Voltage/Frequency	110V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Exterior Finish	Stainless steel
Interior Finish	Stainless steel



REGULAR TOP

DSP29-8-S1 8 x 1/6 PAN

1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6

MEGA TOP

DSP29-12M-S1 12 x 1/6 PAN

1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6



REGULAR TOP

DSP48-12-S2 12 x 1/6 PAN

1/6	1/6	1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6	1/6	1/6

MEGA TOP

DSP48-18M-S2 18 x 1/6 PAN

1/6	1/6	1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6	1/6	1/6



REGULAR TOP

DSP60-16-S2 16 x 1/6 PAN

1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6

MEGA TOP

DSP60-24M-S2 24 x 1/6 PAN

1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6



REGULAR TOP

DSP72-20-S3 20 x 1/6 PAN


1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6

MEGA TOP

DSP72-30M-S3 30 x 1/6 PAN

1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6	1/6

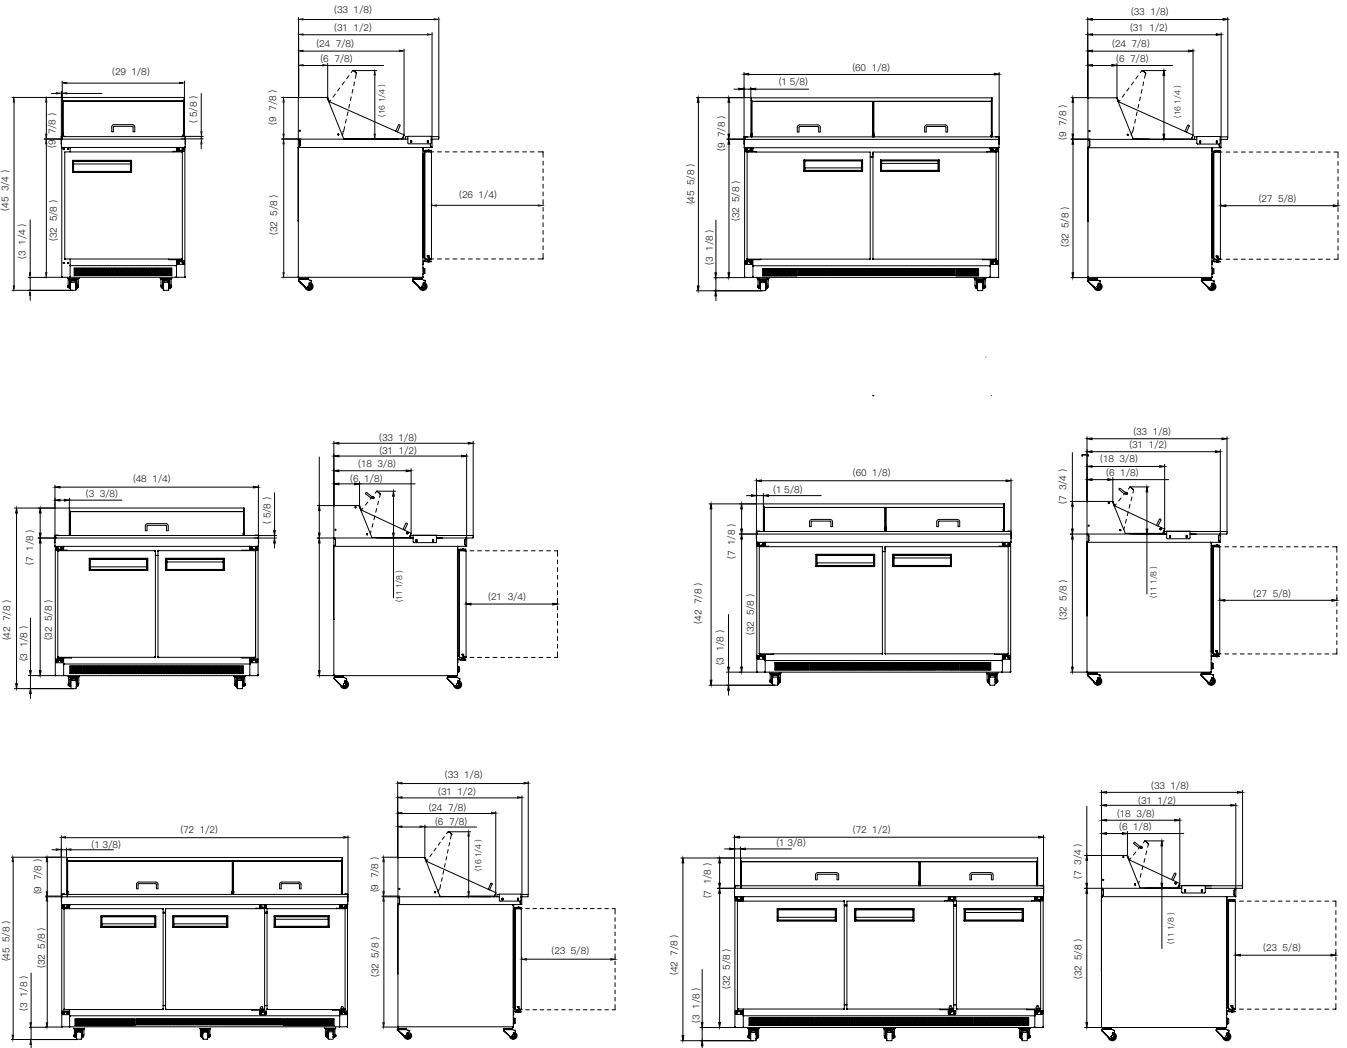


REFRIGERATOR

MODEL	NO	External Dimension(inches)			Packing carton (inches)			Temperature range(°F)	Compressor power(HP)	Gross weight (kg/LB)	#of shelves	Nema Config.	40HQ Container Certification	
		W	D	H	W	D	H							
DSP29	8-S1	29	31 1/2	45 5/8	30 1/2	33 1/8	50 3/4	33~41 °F	1/7	60	132	1	5-15P	84
DSP48	12-S2	48 1/8	31 1/2	45 5/8	49 5/8	33 1/8	50 3/4		1/5	120	264	2	5-15P	46
DSP60	16-S2	60	31 1/2	45 5/8	61 5/8	33 1/8	50 3/4		1/5	130	286	2	5-15P	28
DSP72	20-S3	72 1/4	31 1/2	45 5/8	73 7/8	33 1/8	50 3/4		1/4	160	352	3	5-15P	28

REFRIGERATOR

MODEL	NO	External Dimension(inches)			Packing carton (inches)			Temperature range(°F)	Compressor power(HP)	Gross weight (kg/LB)	#of shelves	Nema Config.	40HQ Container Certification	
		W	D	H	W	D	H							
DSP29	12M-S1	29	31 1/2	45 5/8	30 1/2	33 1/8	50 3/4	33~41 °F	1/7	60	132	1	5-15P	84
DSP48	18M-S2	48 1/8	31 1/2	45 5/8	49 5/8	33 1/8	50 3/4		1/5	120	264	2	5-15P	46
DSP60	24M-S2	60	31 1/2	45 5/8	61 5/8	33 1/8	50 3/4		1/5	130	286	2	5-15P	28
DSP72	30M-S3	72 1/4	31 1/2	45 5/8	73 7/8	33 1/8	50 3/4		1/4	160	352	3	5-15P	28

Unit completely pre-wired at factory and ready for final connection to a 115/60hz single phase 15/20 amp dedicated outlet