



PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------

ENCLOSED TRANSPORT CABINETS

Insulated Utility Transport for Universal Trays, Pans and Gastro-Norm

INSULATED AMBIENT "ETC-UA-INS" SERIES


All purpose insulated cabinet for storage and transport



ETC-UA-13INS

- 1 High density fiber glass insulation throughout retains food quality and temperatures without the use of an external heat source
- 2 Unique design holds 12" x 20" pans, 18" x 26" sheet trays, or GN containers on fully adjustable tray slides. Slides are removable for thorough interior cleaning
- 3 Full perimeter bumper extends beyond doors, handles, etc. preventing damage to facility or cabinet
- 4 Heavy-duty polyurethane casters are long lasting and used for easy maneuverability, even when fully loaded
- 5 Push pull handles provide greater user control and transporting ease
- 6 Made for transport applications - FWE cabinets are fully constructed of stainless steel, with a tubular welded base frame, and designed to absorb vibration and shock during transport
- 7 Keep your food chilled with the popular cold plate cartridge optional accessory
- 8 Heavy-duty die cast hinges support fully insulated door equipped with edge mounted, full grip latch for easy use

***Two year limited warranty**



Adjustable Tray Slides



Heavy Duty Casters



Push Pull Handles



Tubular Welded Base Frame



NON-HEATED

PROJECT:


MODEL:

QUANTITY:

ITEM NO:

SPECIFICATIONS:

ENCLOSED TRANSPORT CABINETS

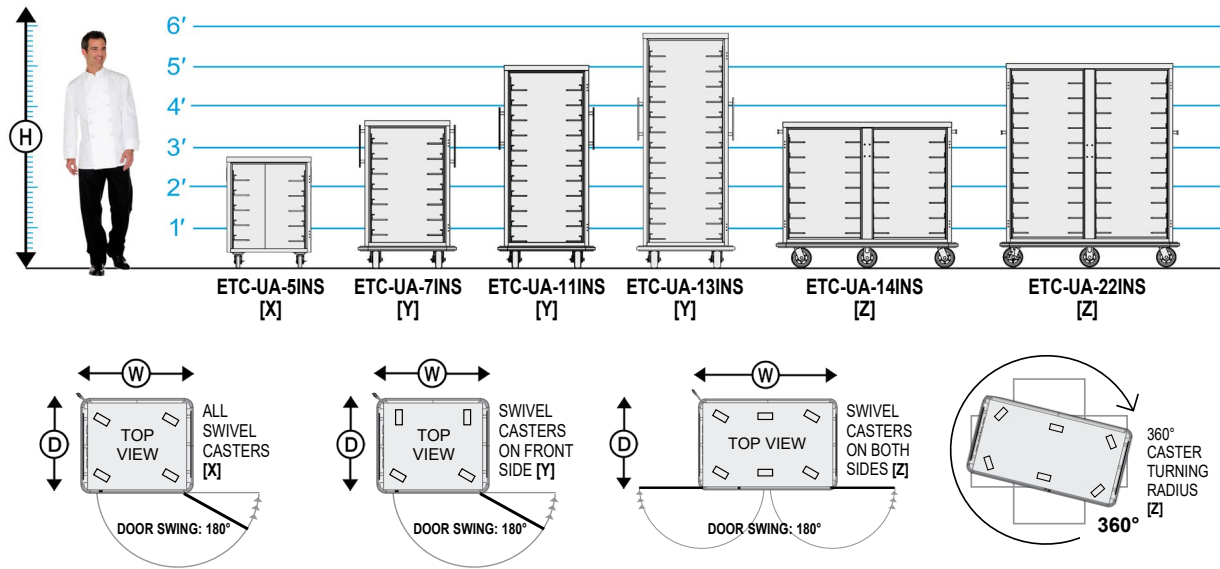

CAPACITIES OF TRAYS / PANS: 4.5" (114 mm) Spacings are Standard [A]

CLASS 100

MODEL NUMBER	STANDARD CAPACITY: NO. OF TRAYS/PANS @ 4.5" Spacings (114 mm)											OPTIONAL CAPACITY: NO. OF TRAYS/PANS @ 3" Spacings (76 mm)											OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)					SHIP WT. LBS. (KG)	
	TRAY/PAN SLIDES PROVIDED	18 x 26	12 x 20	14 x 18	18 x 13	20 x 22	10 x 20	GN 2/1	GN 1/1	MAXI-PAN	20x20 Rack	TRAY/PAN SLIDES PROVIDED	(Additional)	18 x 26	12 x 20	14 x 18	18 x 13	20 x 22	10 x 20	GN 2/1	GN 1/1	MAXI-PAN	20x20 Rack	HIGH "H"	DEEP "D"	WIDE "W"	NUMBER OF DOORS		CASTER SIZE
34" ETC-UA-5INS* Under Counter	5 pr	5	10	10	10	5	10	5	10	5	5	7 pr (2 pr)		7	14	14	14	7	14	7	14	7	7	33.25" (845)	31.25" (794)	25.5" (648)	1	3.5"	260 (118)
ETC-UA-7INS	7 pr	7	14	14	14	7	14	7	14	7	7	10 pr (3 pr)		10	20	20	20	10	20	10	20	10	10	43.75" (1112)	34" (864)	29.25" (743)	1	5"	275 (125)
ETC-UA-11INS	11 pr	11	22	22	22	11	22	11	22	11	11	16 pr (5 pr)		16	32	32	32	16	32	16	32	16	16	60.5" (1537)	34" (864)	29.25" (743)	1	5"	300 (136)
ETC-UA-13INS	13 pr	13	26	26	26	13	26	13	26	13	13	19 pr (6 pr)		19	38	38	38	19	38	19	38	19	19	69.5" (1765)	34" (864)	29.25" (743)	1	5"	315 (143)
ETC-UA-14INS	14 pr	14	28	28	28	14	28	14	28	14	14	20 pr (6 pr)		20	40	40	40	20	40	20	40	20	20	43.5" (1105)	33.5" (851)	54.25" (1378)	2	6"	430 (195)
ETC-UA-22INS	22 pr	22	44	44	44	22	44	22	44	22	22	32 pr (10 pr)		32	64	64	64	32	64	32	64	32	32	61.5" (1563)	33.5" (851)	54.25" (1378)	2	6"	480 (218)

[A] Universal tray slides accommodate: (1) 18" x 26", (2) 12" x 20", (2) 14" x 18", (2) 18" x 13", (1) 20" x 22", (2) 10" x 20" trays/pans. Uprights punched on 1.5" (38 mm) centers. Universal tray slides are adjustable. Number of tray slides are listed above. Standard spacings are 4.5" (114 mm).

ETC-UA-INS models are available with:
Pass-thru Door [add "P"]
See-thru Lexan Door [add "L"]
Dutch Doors [add "D"]
Note: Dutch Doors are 2 half size doors only available on full-size models.

*ETC-UA-5INS is standard with all swivel casters.

CONSTRUCTION. Heliarc welded, single unit construction of stainless steel; 20 gauge polished exterior, 22 gauge stainless steel interior with easy-to-clean coved corners. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10 gauge stainless steel reinforcing plates at corners.

HANDLES. Heavy-duty push bar handles, solid formed 1" x .375" thick; mounted at each end of unit. Mountings reinforced with stainless steel channel. ETC-UA-5INS model shall have recessed handles.

BUMPER. Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame with snap-in, non-marking vinyl

cushion. Full perimeter bumper extends beyond doors, handles, etc., for added protection. Shall be continuous, with corner cut-outs to facilitate cleaning.

CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake.

ETC-UA-14INS and ETC-UA-22INS shall have a caster configuration of two (2) rigid, four (4) swivel with brake. ETC-UA-5INS model shall have a caster configuration of four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate. The caster mounting plate shall be secured to a 10 gauge stainless steel

reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

DOORS AND LATCHES. Flush mounted, stainless steel insulated doors. High temperature gasket sealed; gasket shall be cabinet mounted. Each door shall have two (2) heavy-duty edgmount die cast hinges. Door latch shall be edgmounted, full grip, and positive closing. The hinge and latch mountings are reinforced with stainless steel backing plates.

TRAY SLIDES. Welded rod-style tray slides are nickel plated for greater durability and sanitation. Fully adjustable / removable and designed to give secure bottom tray support. Removable stainless steel uprights shall be punched on 1.5" centers for easy tray adjustment, and shall easily lift off of heavy-duty stainless steel brackets without the use of tools for cleaning.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

OPTIONAL ACCESSORIES

- DOORS**
 - Dutch doors
 - Key locking door latch
 - Magnetic latch
 - Paddle latch
 - Padlocking transport latch
 - Left hand door hinging (single door models only)
- CASTERS**
 - All swivel or larger casters
 - Floorlock (requires 6" casters)
- SPACINGS**
 - Extra tray slides
 - "Ultra-universal" slides
 - Fixed rack assembly
 - Shelves
- EXTRAS**
 - Security packages
 - Tubular stainless steel push handles
 - Top corner bumper
 - Cold plate cartridge
 - Menu card holder
 - Dry erase board



FOOD WARMING EQUIPMENT COMPANY, INC.

5599 HWY. 31 W. Portland, TN 37148

800-222-4393 | WWW.FWE.COM | SALES@FWE.COM

COOK | HOLD | TRANSPORT | SERVE | REFRIGERATION | BARS



FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991. All rights reserved. All specifications subject to change without notice. Errors subject to correction.
 © 19 Food Warming Equipment Company, Inc. | R.19.02