



PROJECT:	MODEL:	QUANTITY:	ITEM NO:

# ENCLOSED TRANSPORT CABINETS

## Non-Insulated Utility Transport for 18" x 26" Trays

### NON-INSULATED AMBIENT "ETC-1826" SERIES

All purpose non-insulated cabinet for storage and transport



ETC-1826-19

## NON-INSULATED

- 1 Made for transport applications - FWE cabinets are fully constructed of stainless steel, with a tubular welded base frame, and designed to absorb vibration and shock during transport
- 2 ETC-1826 series accommodates 18" x 26" or 14" x 18" trays on a fixed one-piece stainless steel rack that is removable for thorough interior cleaning
- 3 Full perimeter bumper extends beyond doors, handles, etc., preventing damage to facility or cabinet
- 4 Heavy-duty polyurethane casters are long lasting and used for easy maneuverability, even when fully loaded
- 5 Tubular push pull handles provide greater user control and transporting ease
- 6 Insulated door paired with the high temperature gasket provides additional temperature retention for both hot and cold product
- 7 Keep your food chilled with the popular cold plate cartridge optional accessory
- 8 Heavy-duty die cast hinges support fully insulated door equipped with edge mounted, full grip latch for easy use

*\*Two year limited warranty*



Tubular Welded Base Frame



Fixed Slides



Built for Transport





Tubular Push Pull Handles



**NON-HEATED**

PROJECT:	MODEL:	QUANTITY:	ITEM NO:
----------	--------	-----------	----------

# SPECIFICATIONS: NON-INSULATED ENCLOSED TRANSPORT CABINETS

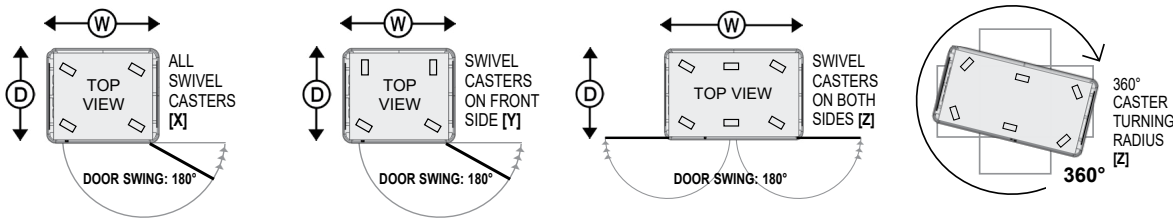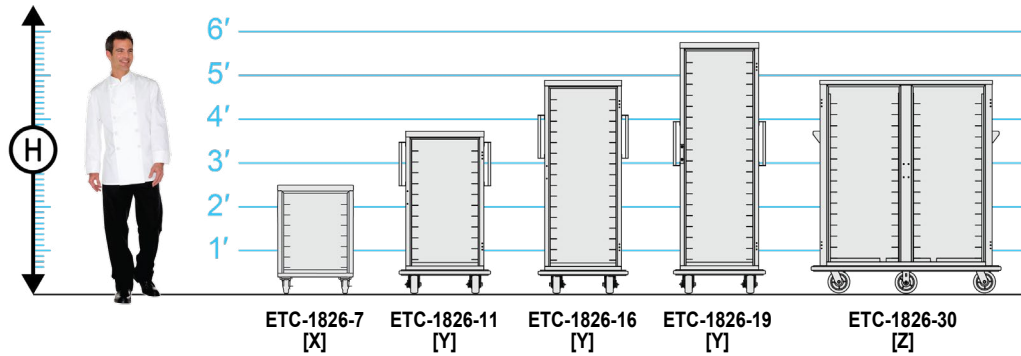

CAPACITIES OF TRAYS/PANS: 3" Spacings are Standard								CLASS 100					
MODEL NUMBER	STANDARD FIXED RACK:[A] @ 3" Spacings		OPTIONAL ADJUSTABLE SLIDES:[B] @ 3" Spacings				OVERALL EXTERIOR DIMENSIONS IN.(mm) (Height Includes Casters)			NO. OF DOORS	CASTER SIZE	SHIP WT. LBS. (KG)	
	18 x 26	14 x 18	TRAY/PAN SLIDES PROVIDED	18 x 26	12 x 20	14 x 18	GN 1/1	HIGH "H"	DEEP "D"				WIDE "W"
<b>ETC-1826-7</b> Under Counter	7	14	7pr	7	7	14	7	30.25" (769)	31" (788)	22" (559)	1	3.5" ALL SWIVEL	180 (82)
<b>ETC-1826-11</b>	11	22	11pr	11	11	22	11	44" (1118)	34.5" (877)	25.75" (655)	1	5"	210 (96)
<b>ETC-1826-16</b>	16	32	16pr	16	16	32	16	59" (1499)	34.5" (877)	25.75" (655)	1	5"	255 (156)
<b>ETC-1826-19</b>	19	38	19pr	19	19	38	19	68" (1728)	34.5" (877)	25.75" (655)	1	5"	290 (132)
<b>ETC-1826-30</b>	30	60	30pr	30	30	60	30	58" (1474)	33.25" (845)	49.5" (1258)	2	6"	480 (218)

[A] Fixed slides accommodate: (1) 18" x 26" and (2) 14" x 18" trays/pans.

[B] Optional adjustable tray-slides accommodate: one (1) 18" x 26", one (1) 12" x 20", two (2) 14" x 18" and one (1) GN 1/1 containers. Uprights punched on 1.5" centers.

ETC-1826 models are available with:  
**Pass-thru Door** [add "P"]  
**See-thru Lexan Door** [add "L"]  
**Dutch Doors** [add "D"]  
**Note:** Dutch Doors are 2 half size doors only available on full-size models.

**CONSTRUCTION.** Heliarc welded, single unit construction of stainless steel; 18 gauge polished exterior with easy-to-clean covered corners. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10 gauge stainless steel reinforcing plates at corners.  
**HANDLES.** Heavy-duty, 1" diameter tubular stainless steel push bar handles mounted at each end of the unit. ETC-1826-7 model shall have recessed handles.  
**BUMPERS.** Solid 1.5" wide continuous wraparound aluminum channel, bolted to frame with snap-in, non-marking vinyl cushion. Full perimeter bumper extends beyond doors, handles, etc., for added protection. Shall be continuous, with corner cut-outs to facilitate cleaning. ETC-1826-7 is standard without a bumper.

**CASTERS.** Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. ETC-1826-30 shall have a caster configuration of two (2) rigid, four (4) swivel with brake. ETC-1826-7 shall have a caster configuration of four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.  
**DOORS AND LATCHES.** Flush mounted, stainless steel insulated doors. High temperature gasket sealed; gasket shall be cabinet mounted. Each door shall have two

(2) heavy-duty edgemount die cast hinges. Door latch shall be edgemounted, full grip, and positive closing. The hinge and latch mountings are reinforced with stainless steel backing plates.  
**FIXED RACK.** Removable pair of one piece stainless steel racks with fixed spacing of 3" between pan slides. Each pan slide accommodates one (1) 18" x 26" or two (2) 14" x 18". One piece rack is easy to remove without the use of tools for cleaning.  
**INSTALLATION.** Unit should not be installed in an area where adverse environmental conditions are present.

## OPTIONAL ACCESSORIES

- DOORS**
  - Dutch doors
  - Key locking door latch
  - Magnetic latch
  - Paddle latch
  - Padlocking transport latch
  - Left hand door hinging (single door models only)
- CASTERS**
  - All swivel or larger casters
  - Floorlock (requires 6" casters)
- SPACINGS**
  - Adjustable tray slides
  - Custom tray rack spacings
  - Shelves
- EXTRAS**
  - Security packages
  - Top corner bumper
  - Cold plate cartridge
  - Menu card holder
  - Dry erase board



**FOOD WARMING EQUIPMENT COMPANY, INC.**  
 5599 HWY. 31 W. Portland, TN 37148  
 800-222-4393 | WWW.FWE.COM | SALES@FWE.COM

COOK | HOLD | TRANSPORT | SERVE | REFRIGERATION | BARS



FWE products may be covered under one or more of the following U.S. patents: 288,299;238,300;3,952,609;4,192,991. All rights reserved. All specifications subject to change without notice. Errors subject to correction.  
 © 19 Food Warming Equipment Company, Inc. | R.19.01