

MOBILE BACK BARS

Versatile Bar Storage

"PSC" SERIES

Increase beverage sales with more storage for your portable bar

- 1 Made for mobile applications - perfect for event hosting in any environment where additional bar storage is required. Keep backstock of liquor, mixers, supplies, secured with doors if necessary
- 2 Available in a variety of styles:
 - Weather-All - Stainless Steel Throughout
 - Professional - Laminate Exterior
 - Executive - Maple Wood Exterior
 - Architectural - Mahogany Wood Exterior
 Wood and laminate styles come in a variety of stain and color options (see back)
- 3 All PSC series back bars are constructed with a stainless steel tubular welded base frame designed to absorb shock during transport
- 4 Easy to clean - Our stainless steel or durable wood and laminate surfaces/bar-tops are easy to clean and maintain
- 5 Mirrored canopy optional accessory available (see back side)
- 6 Matching bars and ice carts are available in each style FWE offers: Weather-all, Professional, Executive, and Architectural
- 7 Multi-use - also perfect for buffet serving or as portable storage

***Two Year Limited Warranty**



SPSC-8
WEATHER-ALL SERIES
(STAINLESS STEEL)

Shown with Optional Accessory Full Perimeter Bumper



AS-PSC-6
ARCHITECTURAL SERIES
(MAHOGANY WOOD)



Made for Mobile Applications



Tubular Welded Base Frame



Easy to Clean Surfaces




Portable Storage



SPECIFICATIONS

MOBILE BACK BARS

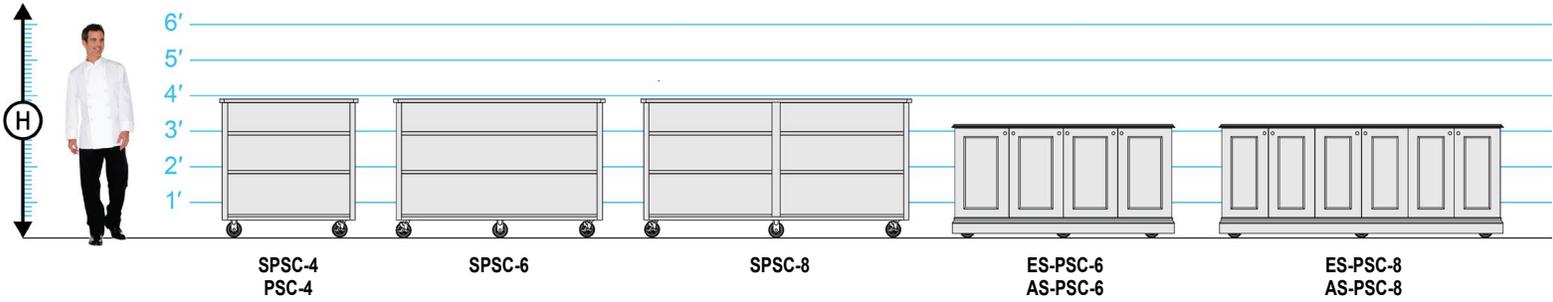

Stainless and Laminate Models are NSF Approved

	MODEL NUMBER	OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)			Consult Factory for SHIPPING CLASS	
		HIGH "H"	DEEP "D"	WIDE "W"	CASTER SIZE	SHIP WT. LBS. (KG)
Stainless Steel	SPSC-4	46.5" (1181)	26" (661)	45.5" (1156)	5"	265 (121)
	SPSC-6	46.5" (1181)	26" (661)	69.5" (1766)	5"	435 (198)
	SPSC-8	46.5" (1181)	24.75" (629)	92.25" (2344)	5"	580 (264)
Laminate	PSC-4	46.5" (1181)	26" (661)	45.5" (1156)	5"	315 (143)

*Adding a full bumper will add 1.5" to the width and .5" to depth.

**Custom size solutions are available, consult factory.

	MODEL NUMBER	OVERALL EXTERIOR DIMENSIONS IN. (mm) (Height Includes Casters)			Consult Factory for SHIPPING CLASS	
		HIGH "H"	DEEP "D"	WIDE "W"	CASTER SIZE	SHIP WT. LBS. (KG)
Maple Wood	ES-PSC-6	38" (966)	26" (611)	74" (1880)	5"	470 (213)
	ES-PSC-8	38" (966)	26.75" (680)	96" (2439)	5"	630 (286)
Mahogany Wood	AS-PSC-6	38" (966)	26" (661)	74" (1880)	5"	460 (209)
	AS-PSC-8	38" (966)	26.75" (680)	96" (2439)	5"	630 (286)

OPTIONAL ACCESSORY:
Mirrored Canopy with Recessed Canned Lighting



LAMINATE STYLES



MAPLE WOOD STAINS



MAHOGANY WOOD STAINS



Scan QR code for our full wood and laminate selection sheet

CONSTRUCTION. Heliarc welded, single unit construction shall consist of welded stainless steel base frame of heavy gauge 1" square stainless steel tubing with extra 10 gauge stainless steel caster corner plate reinforcements. Front and side panels shall be high-pressure, dual-side counter-balanced laminate .75" thick finish. Laminate selections are available.

FINISH MATERIALS & TOP.

SPSC Series: Shall be stainless steel, heliarc welded; ground and polished exterior and stainless steel bar top. Work surface shall be constructed of 20 gauge stainless steel. Interior of body shall be lined with 22 gauge stainless steel, bonded to cabinet walls and bottom storage area.

PSC Series: Side panels shall be high-pressure, dual-side counter-balanced laminate .75" thick finish. Laminate selections are available. Full length, black laminate top with bull-nose rounded corners.

ES-PSC Series: Classic raised solid maple wood panels. All wood surfaces finished with polymer coating to deter scratching and gouging. Constructed with reinforced joints for additional strength and durability. Solid surface top.

AS-PSC Series: Classic raised solid mahogany wood panels, crown molding, laminate top, solid mahogany wood skirt. All wood surfaces finished with polymer coating to deter scratching and gouging. Constructed with reinforced joints for additional strength and durability.

CASTERS. Maintenance free polyurethane tire casters in a configuration of two (2) rigid and two (2) swivel with brake. Six (6) and eight (8) foot models are equipped with six (6) casters: two (2) rigid casters and four (4) swivel with brake. Casters shall have a reinforced yoke mounted to 10 gauge caster plate. The caster mounting plate shall be secured to a 10 gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.

INSTALLATION. Unit should not be installed in an area where adverse environmental conditions are present.

CASTERS (SPSC & PSC only)
Larger casters
BUMPERS (SPSC & PSC only)
Corner bumpers
Full perimeter bumper
Vertical s/s corner guards
EXTRAS
Locking doors for storage areas
Custom laminate or stain
Custom tops
Graphic wrap (SPSC only)
Mirrored Canopy (AS & ES only)

FOOD WARMING EQUIPMENT COMPANY, INC.

5599 HWY. 31 W. Portland, TN 37148

800-222-4393 | WWW.FWE.COM | SALES@FWE.COM

COOK | HOLD | TRANSPORT | SERVE | REFRIGERATION | BARS



FWE products may be covered under one or more of the following U.S. patents: 288,299; 238,300; 3,952,609; 4,192,991. All rights reserved. All specifications subject to change without notice. Errors subject to correction.
© 22 Food Warming Equipment Company, Inc. | R.22.01