



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company
215 Federal Avenue
Belleville, WI 53508-9201

Phone: 800-356-4206
Fax: 608-424-3234
Email: geninfo@federalind.com
Website: www.federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA#

SIS#

ELEMENTS COUNTERTOP HOT SERVE AND SELF-SERVE MERCHANDISERS


HOT SERVICE

MODEL	DIMENSIONS (Includes End Panels)
<input type="checkbox"/> EH2428	24 x 29.7 x 25.1 (in) 610 x 754 x 638 (mm)
<input type="checkbox"/> EH3628	35 x 29.7 x 25.1 (in) 889 x 754 x 638 (mm)
<input type="checkbox"/> EH4828	47 x 29.7 x 25.1 (in) 1194 x 754 x 638 (mm)

HOT SELF-SERVE

MODEL	DIMENSIONS (Includes End Panels)
<input type="checkbox"/> EH2428SS	24 x 29.7 x 25.1 (in) 610 x 754 x 638 (mm)
<input type="checkbox"/> EH3628SS	35 x 29.7 x 25.1 (in) 889 x 754 x 638 (mm)
<input type="checkbox"/> EH4828SS	47 x 29.7 x 25.1 (in) 1194 x 754 x 638 (mm)

The Elements™ counter top merchandiser provides value without sacrificing performance.



STANDARD FEATURES

Model Features

- Stainless steel heated shelves, two tiers. Shelves are adjustable up and down and can also be tilted in two positions.
- Tempered front and glass ends.
- Stainless steel display deck.
- Easily accessible light switch and variable heat control.
- Cord and plug (NEMA 5-15P).
- Self-serve models with lift-up front doors.

Shelving

- Removable sliding rear doors, shelf supports, and shelves.

Lighting

- 3500K LED top and individual shelf lights. Lights are independently wired.

- DLC Certified, IP66 rated.

Agency Approvals

- UL Safety and UL Sanitation Listed.
- DOE 2017 Compliant.



WARRANTY*
One year Parts and Labor
2nd thru 5th year part
only service compressor
(U.S.A and Canada)

Note: Information is subject to change at any time.
Visit www.federalind.com for the most current specs.

Revised 02/18/2020

AIA#

ELEMENTS COUNTERTOP HOT SERVE AND SELF-SERVE MERCHANDISERS

SIS#


Product Specifications

Intended Environment: Not intended for use outdoors or in environments exceeding 90% relative humidity

Zone	Intended Product to Be Displayed	Warmest Avg Prod Temp °F/°C
All	Packaged heated product	160°F/(71.1°C)

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.19 (4.8)

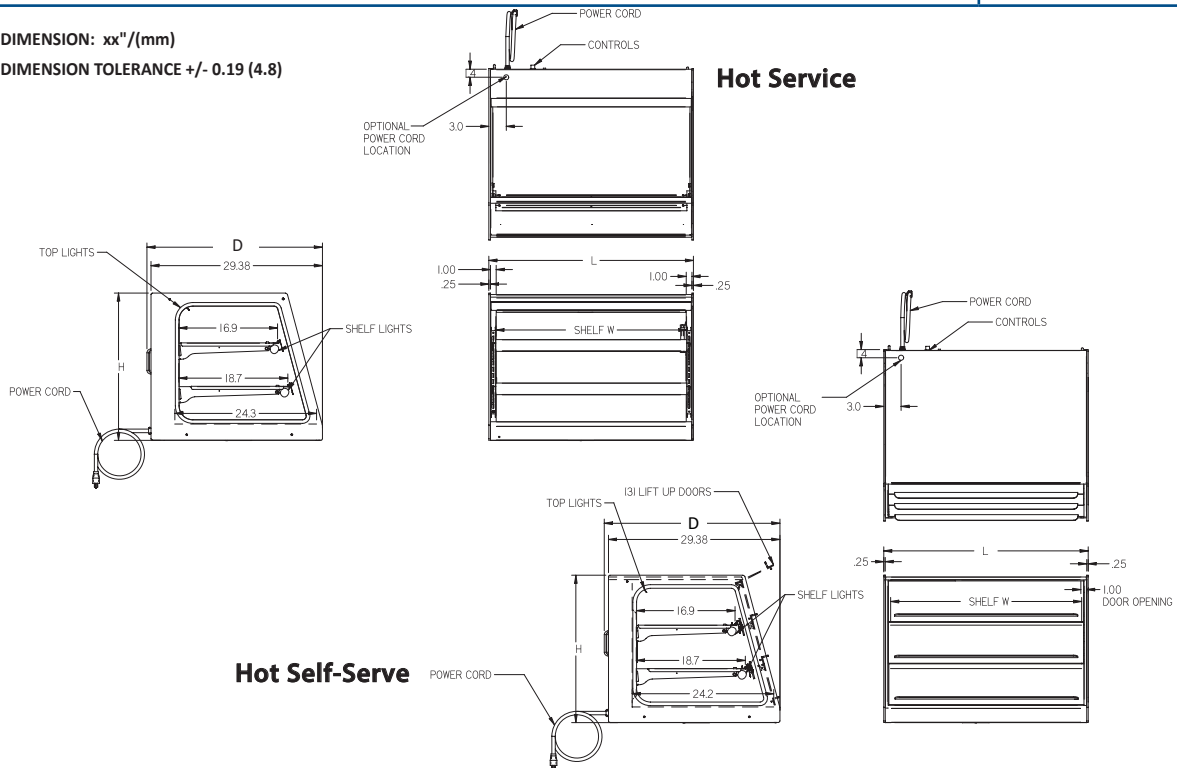

MODEL	DIMENSIONS				SHIPPING WHT		ELECTRICAL 120/60/1	
	L	D	H	UNITS	LBS	KILO	AMPS	WATTS
HOT SERVICE							AMPS	WATTS
EH2428	24	29.7	25.1	in.	290	132	7.2 AMPS	860
	610	754	638	mm.				
EH3628	35	29.7	25.1	in.	333	151	8.5 AMPS	1000
	889	754	638	mm.				
EH4828	47	29.7	25.1	in.	375	170	11.0 AMPS	1330
	1194	754	638	mm.				
HOT SELF-SERVE							AMPS	WATTS
EH2428SS	24	29.7	25.1	in.	290	132	7.2 AMPS	860
	610	754	638	mm.				
EH3628SS	35	29.7	25.1	in.	333	151	10 AMPS	1120
	889	754	638	mm.				
EH4828SS	47	29.7	25.1	in.	375	170	12.5 AMPS	1450
	1194	754	638	mm.				

- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.
- Due to continuing engineering improvements, specifications are subject to change without notice.



ANSI/NSF 4



The Signature of Quality®

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue Belleville, Wisconsin 53508-9201

Phone: 800-356-4206

Fax: 608-424-3234

Email: Geninfo@Federalind.com

Website: Federalind.com